
CORRIE F rev 3 Step 6: B-29 crown lid - PAGE MAP

Paper: LETTER 215.9 x 279.4 mm, 5 rows x 3 cols = 15 tiles (+ this map = 16 pages).

Print at 100% / ACTUAL SIZE (no 'fit to page'). Verify the 100 mm and 4 in squares.

Assemble: rows A.. top to bottom, columns 1.. left to right; overlap 12 mm.

Lines: solid = CUT, grey dashed = SEW, red = notches, blue arrow = grain, circle+cross = drill hole.

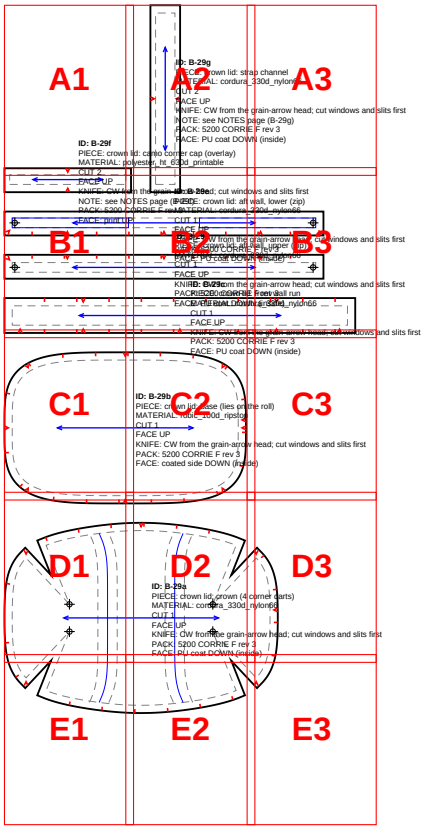

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

A2 >

A2 >

v B1

v B1

ID: B-29f
PIECE: crown lid: camo corner cap (overlay)
MATERIAL: polyester, bt 630d, p[illegible]

PRINT AT 100% / ACTUAL SIZE - check test square

< A1

A3 >

ID: B-29g
PIECE: crown lid: strap channel
MATERIAL: cordura_330d_nylon66
CUT 2
FACE UP
KNIFE: CW from the grain-arrow head; cut windows and slits first
NOTE: see NOTES page (B-29g)
PACK: 5200 CORRIE F rev 3
FACE: PU coat DOWN (inside)

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

< A1

A3 >

Measure: must be exactly 100 mm / 4 in

v B2

v B2

< A2


100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)


< A2

Measure: must be exactly 100 mm / 4 in

v B3

v B3

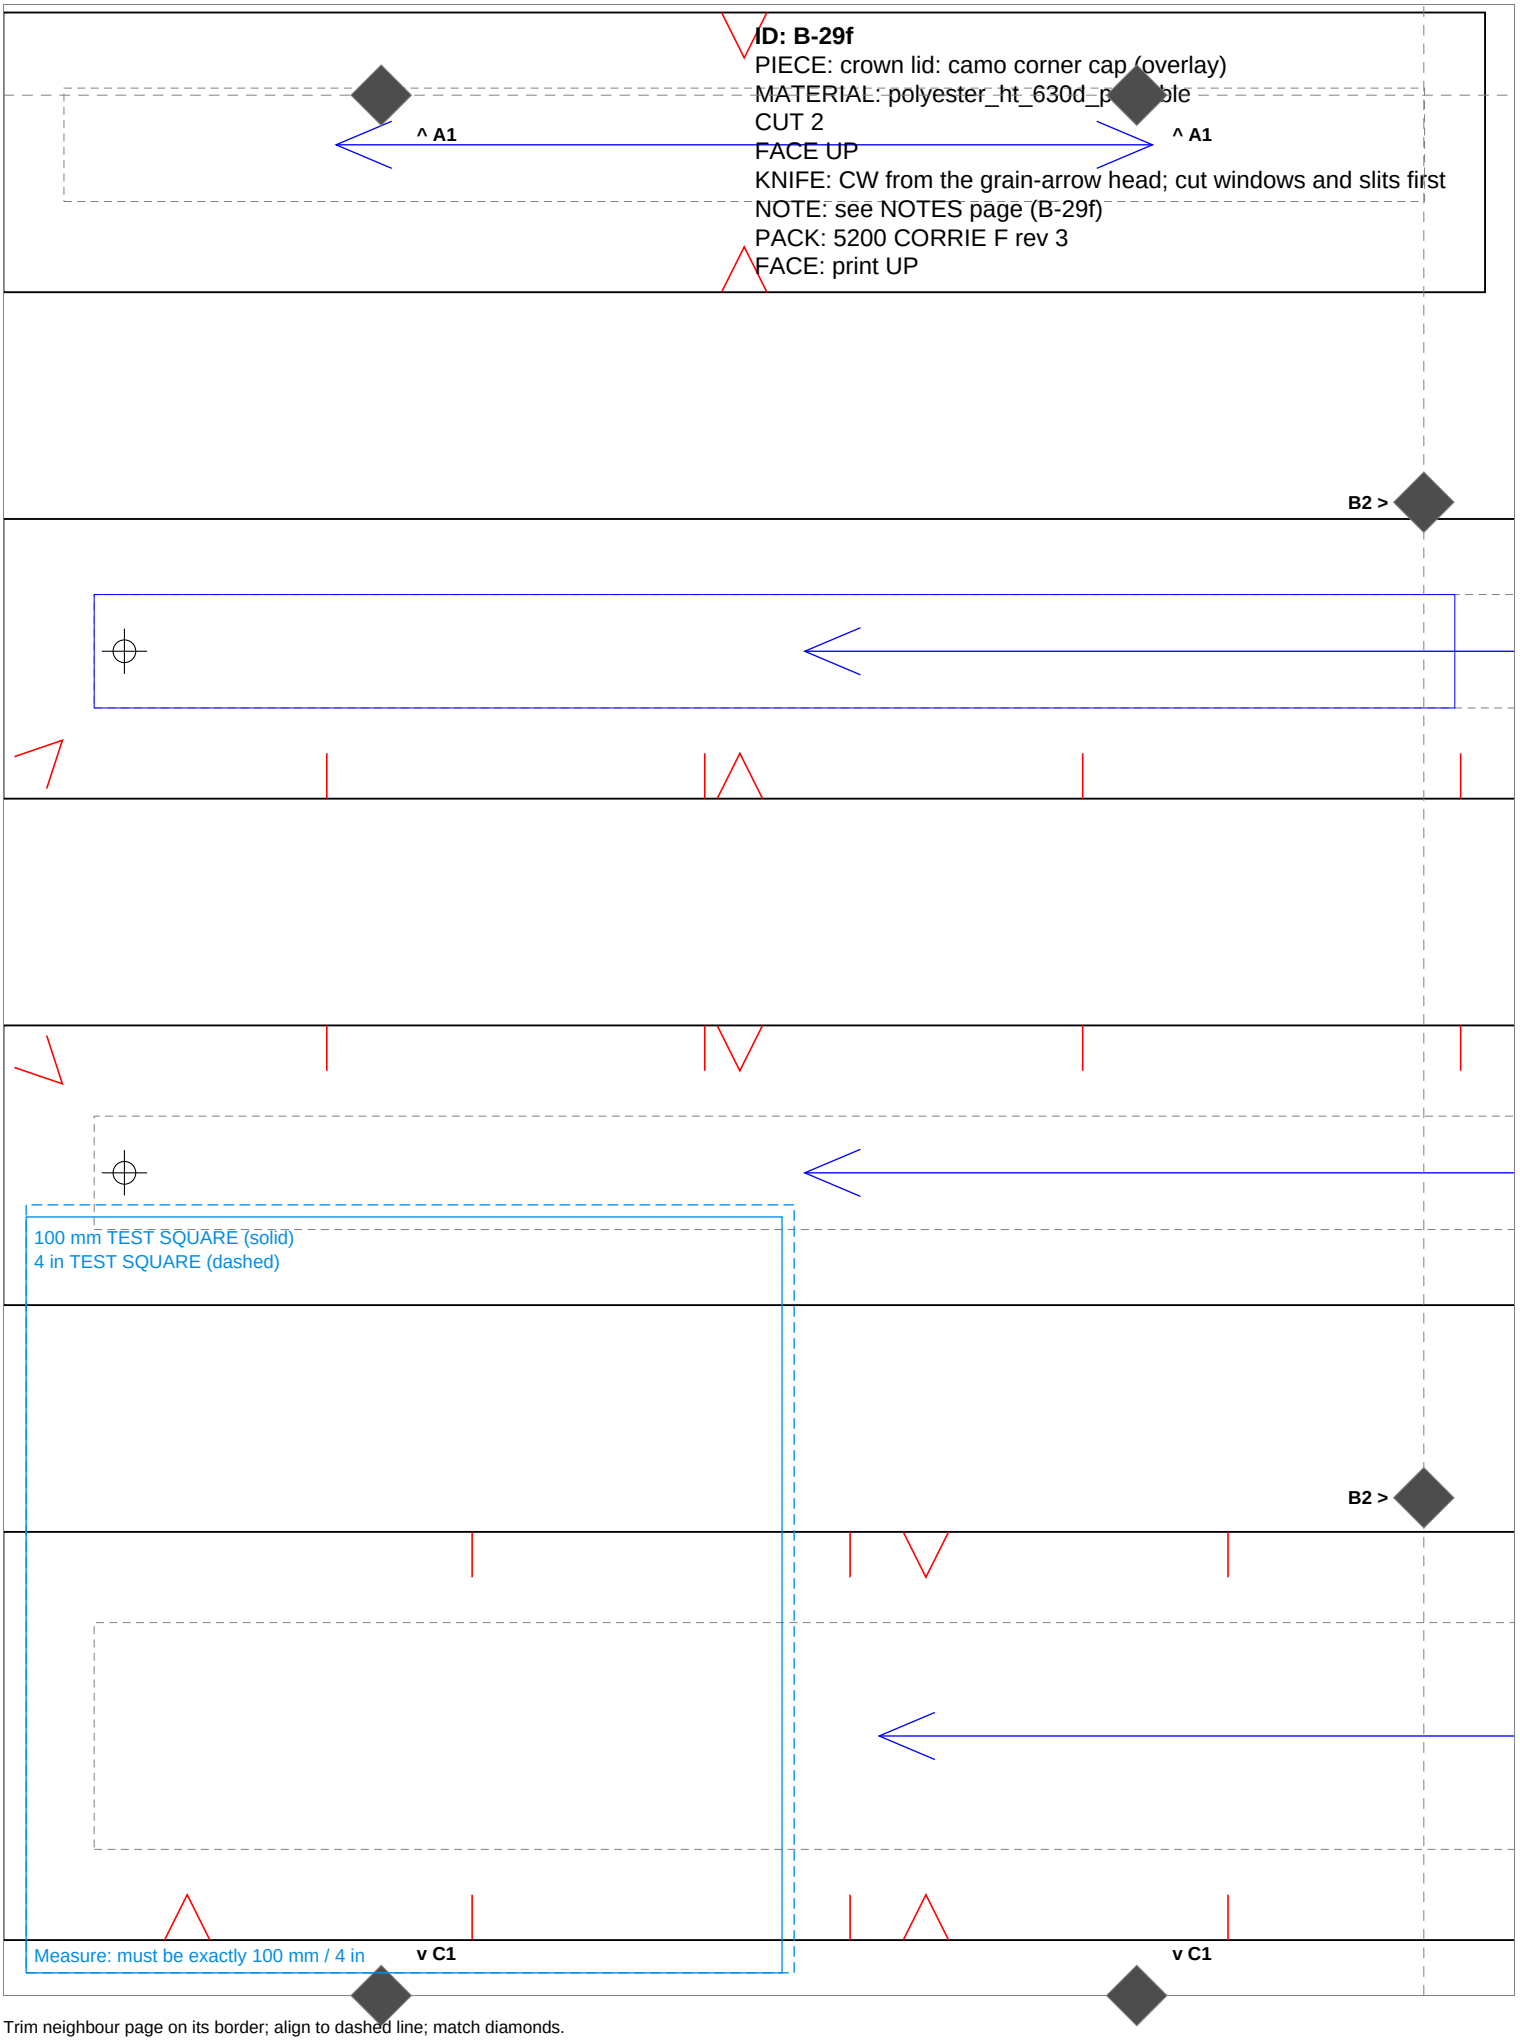
ID: B-29f
PIECE: crown lid: camo corner cap (overlay)
MATERIAL: polyester_ht_630d_p ble
CUT 2
FACE UP
KNIFE: CW from the grain-arrow head; cut windows and slits first
NOTE: see NOTES page (B-29f)
PACK: 5200 CORRIE F rev 3
FACE: print UP
^ A1
^ A1
B2 >
100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
B2 >
Measure: must be exactly 100 mm / 4 in
v C1
v C1

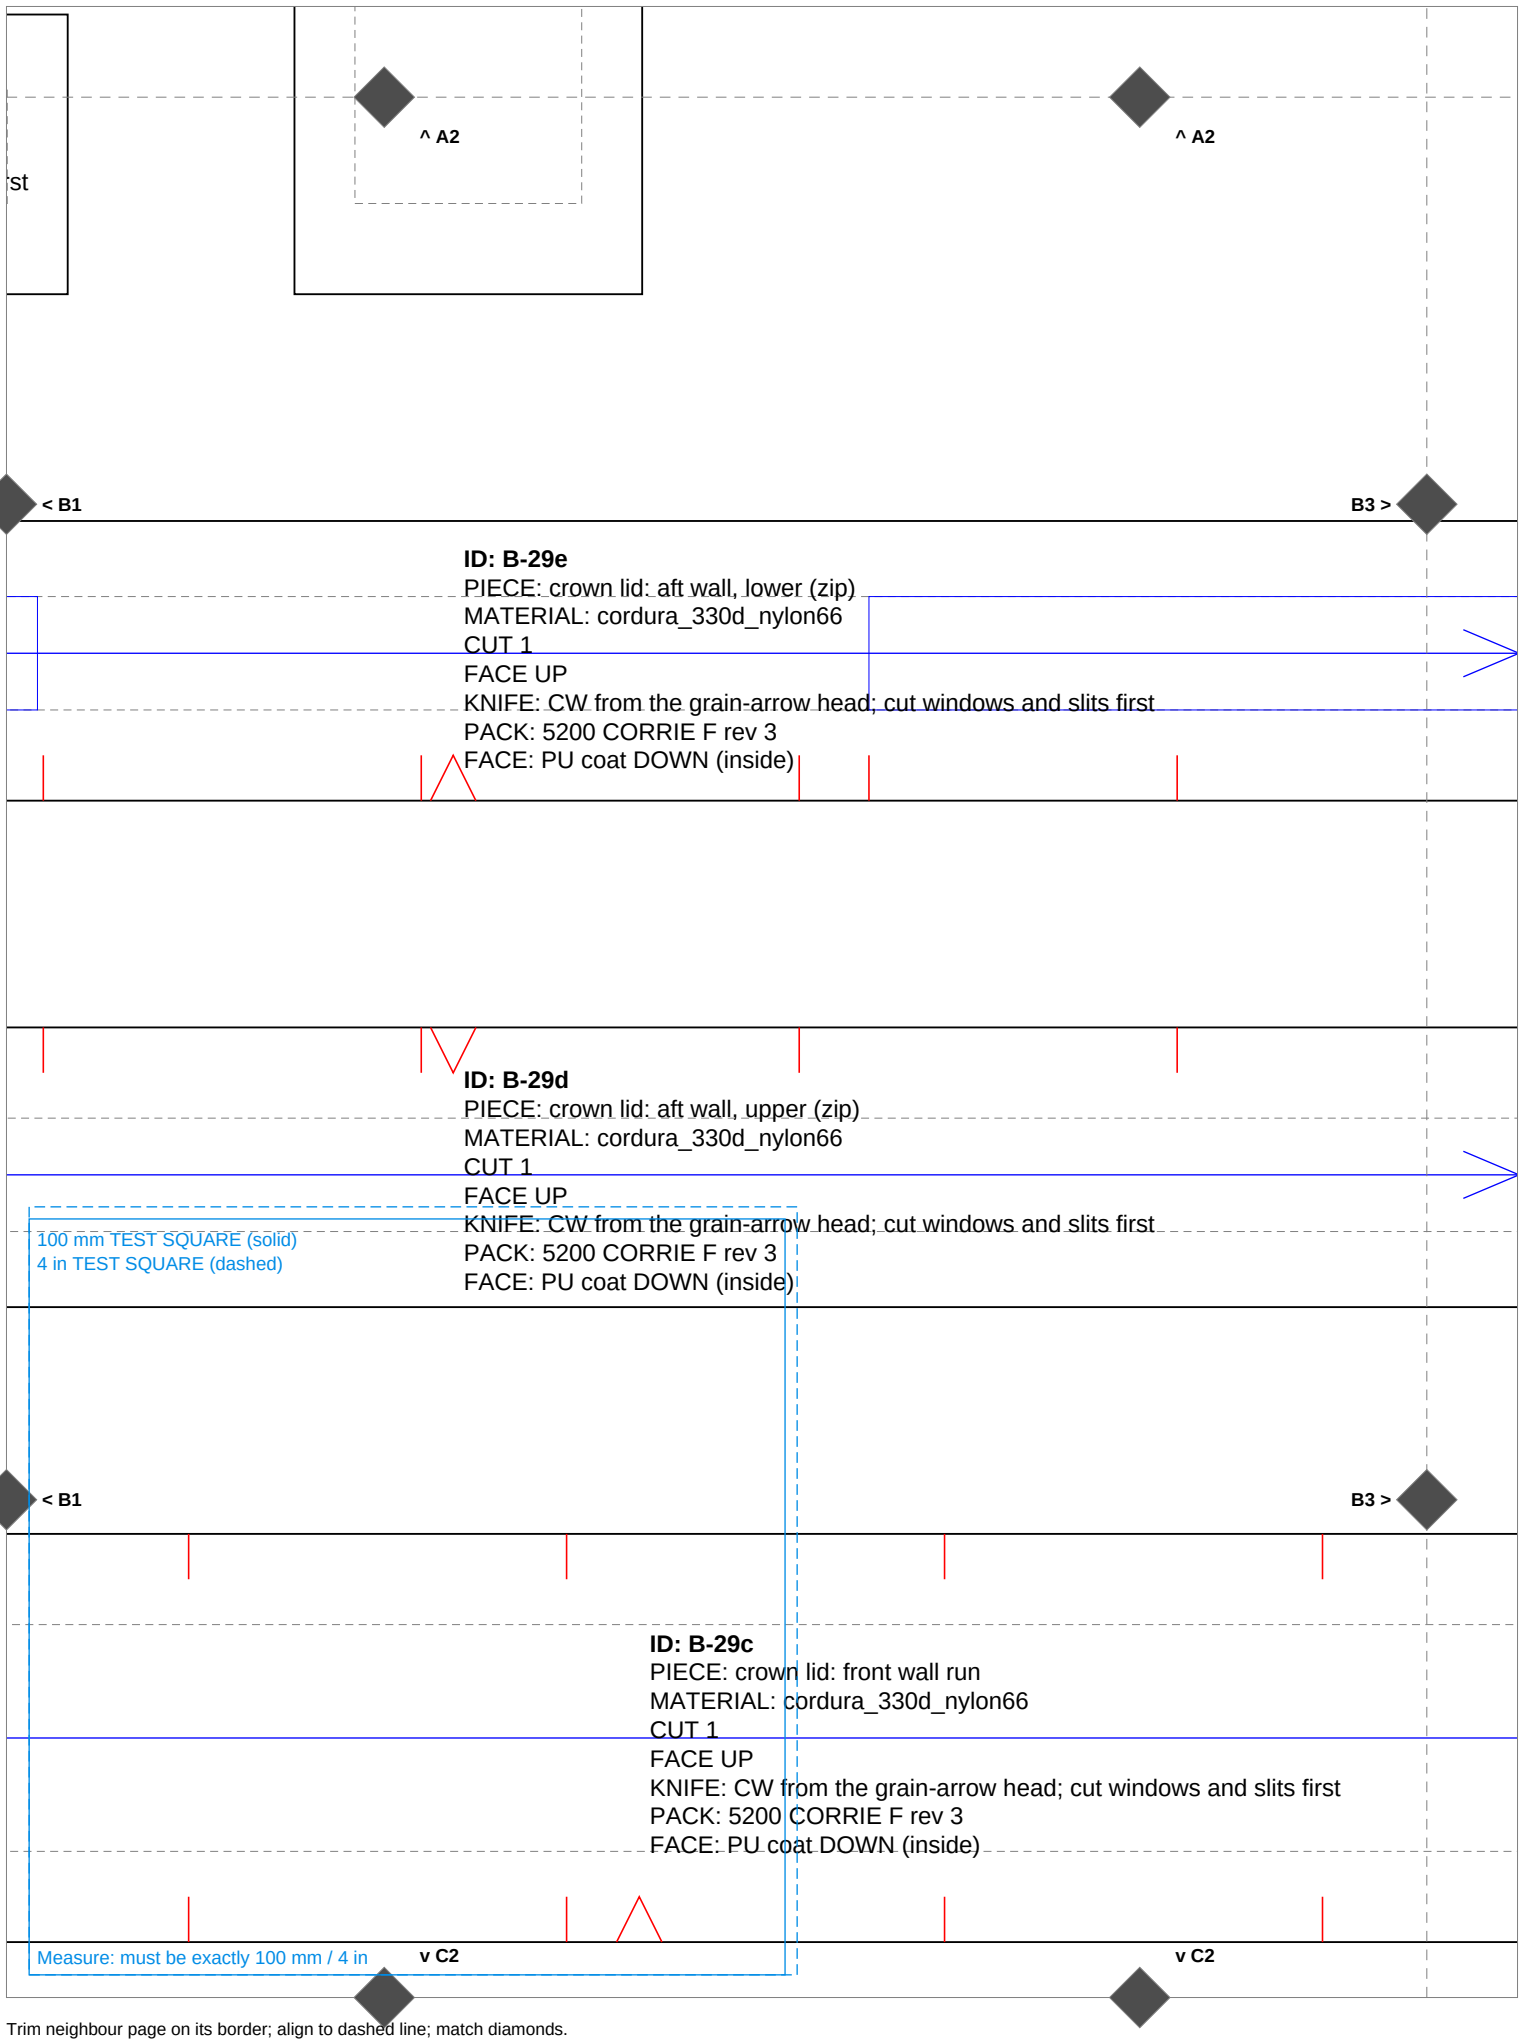



Trim neighbour page on its border; align to dashed line; match diamonds.

^ A3


^ A3

< B2

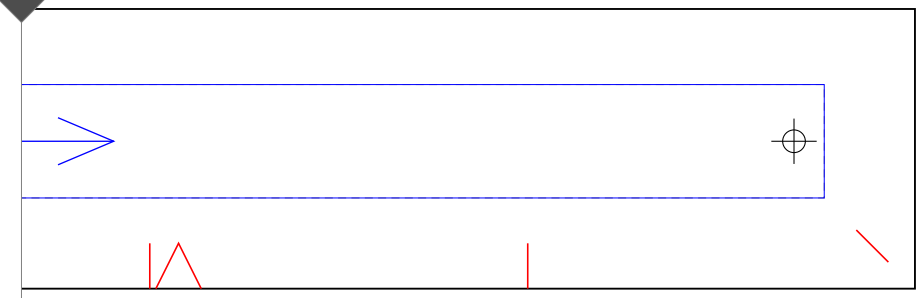

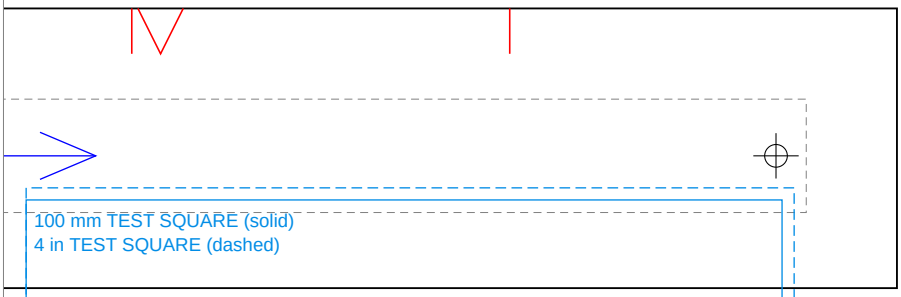


< B2

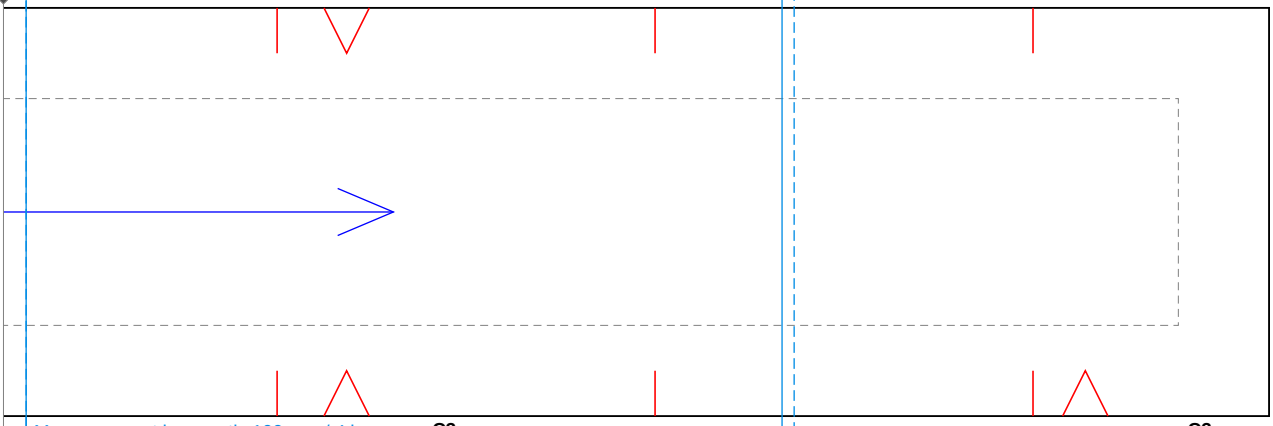

v C3


v C3

PRINT AT 100% / ACTUAL SIZE - check test square

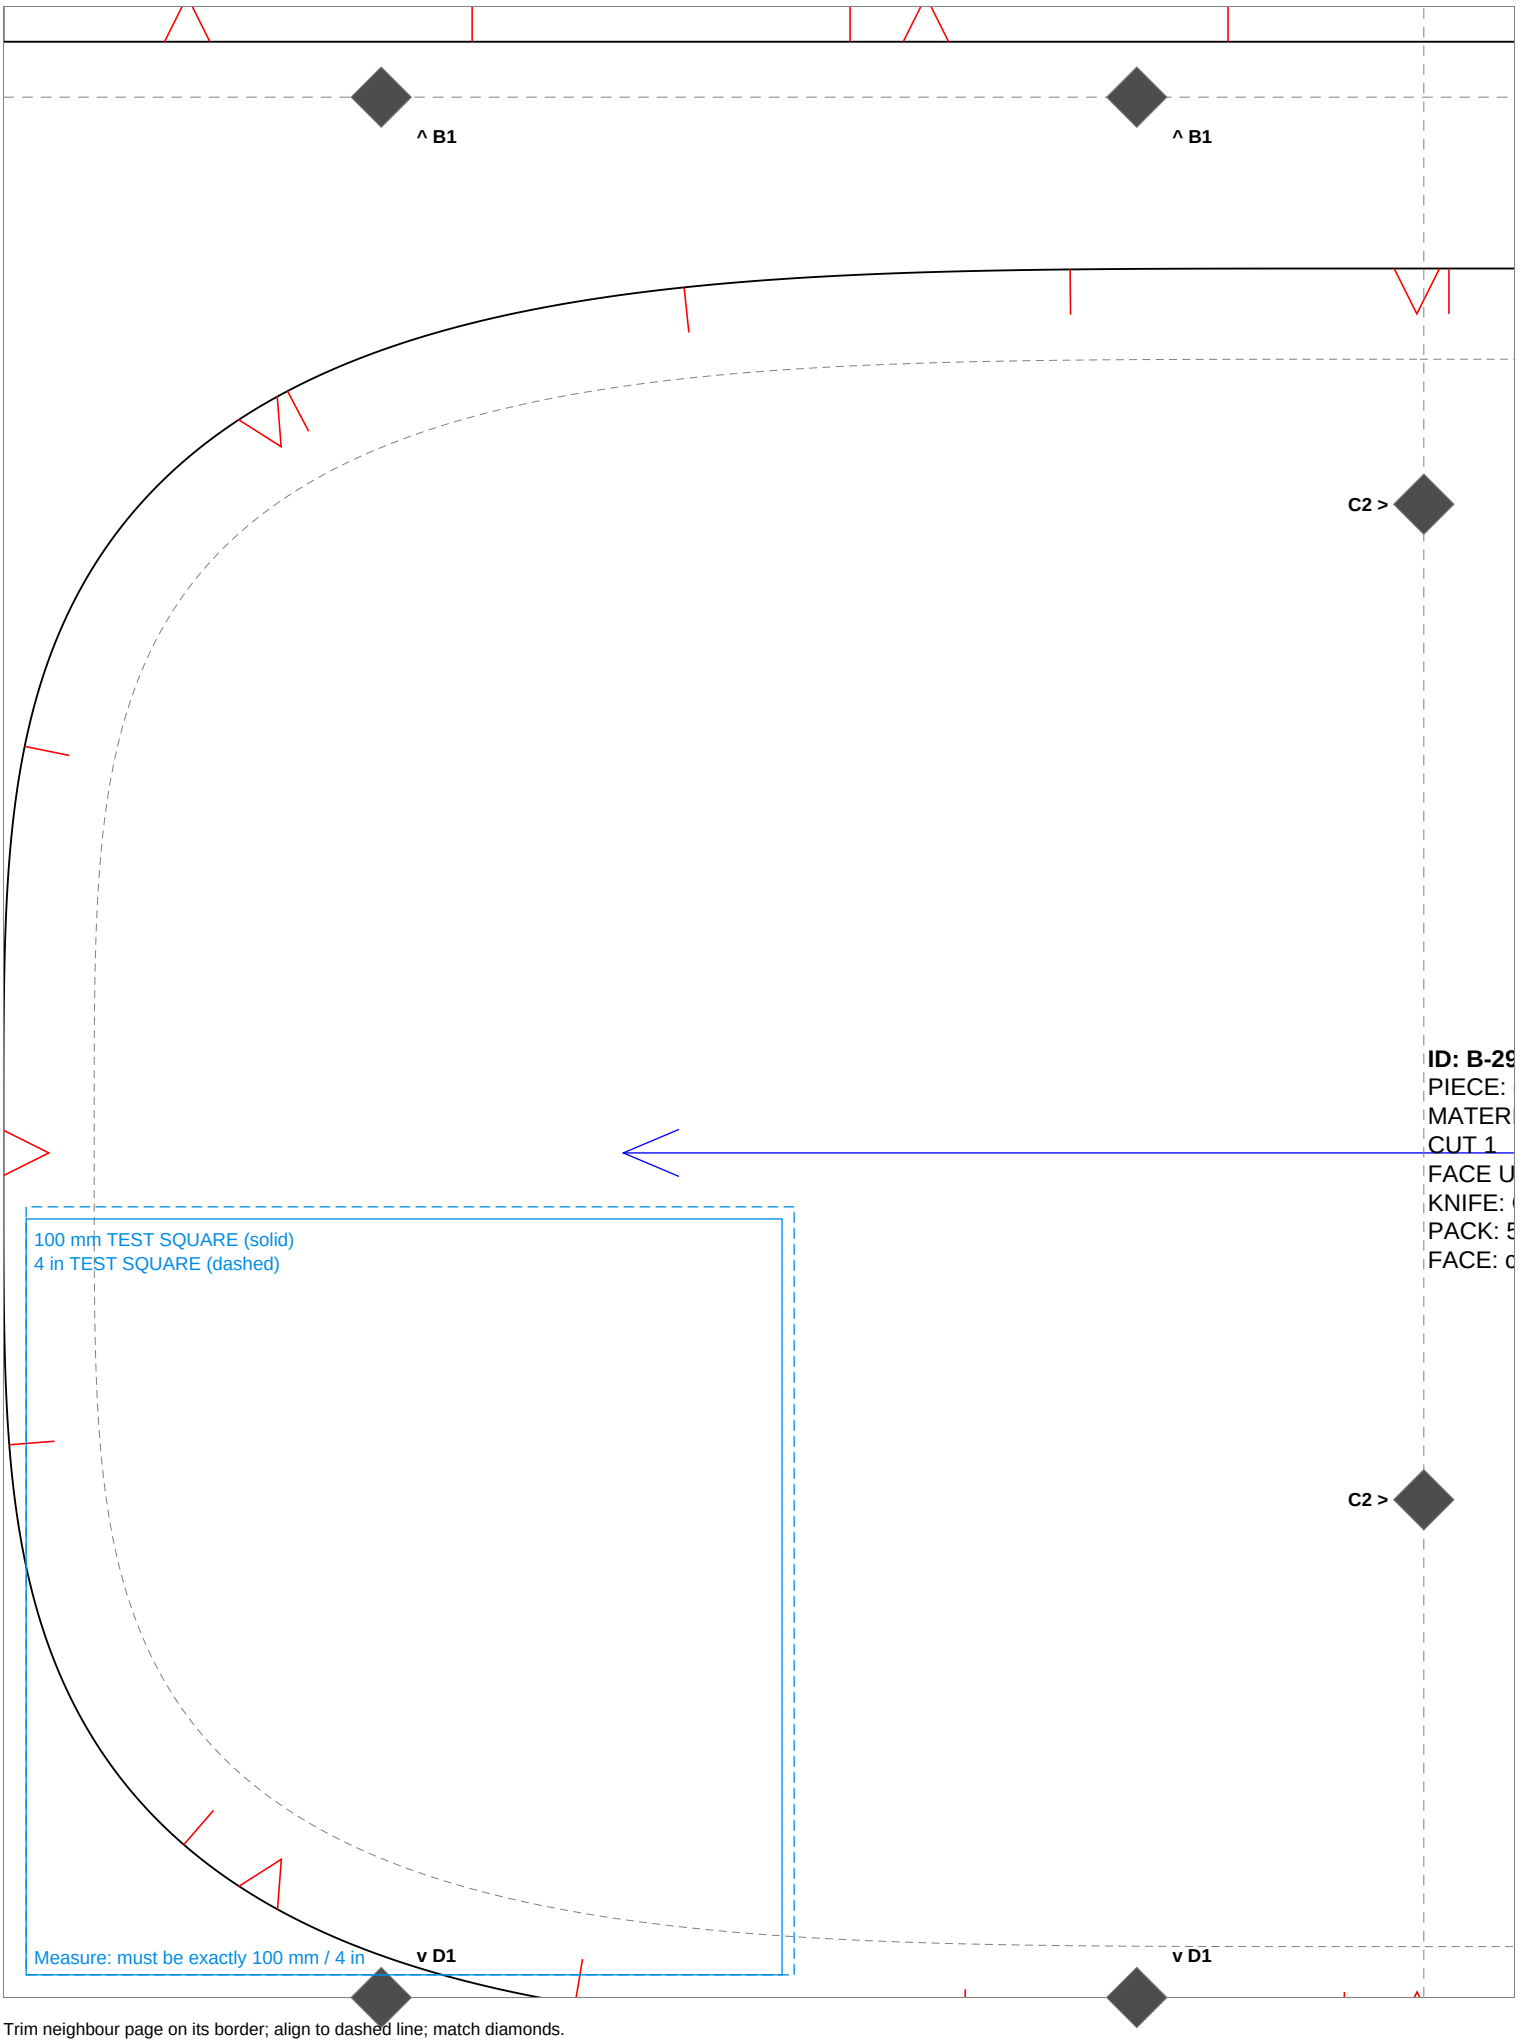


Trim neighbour page on its border; align to dashed line; match diamonds.


PRINT AT 100% / ACTUAL SIZE - check test square

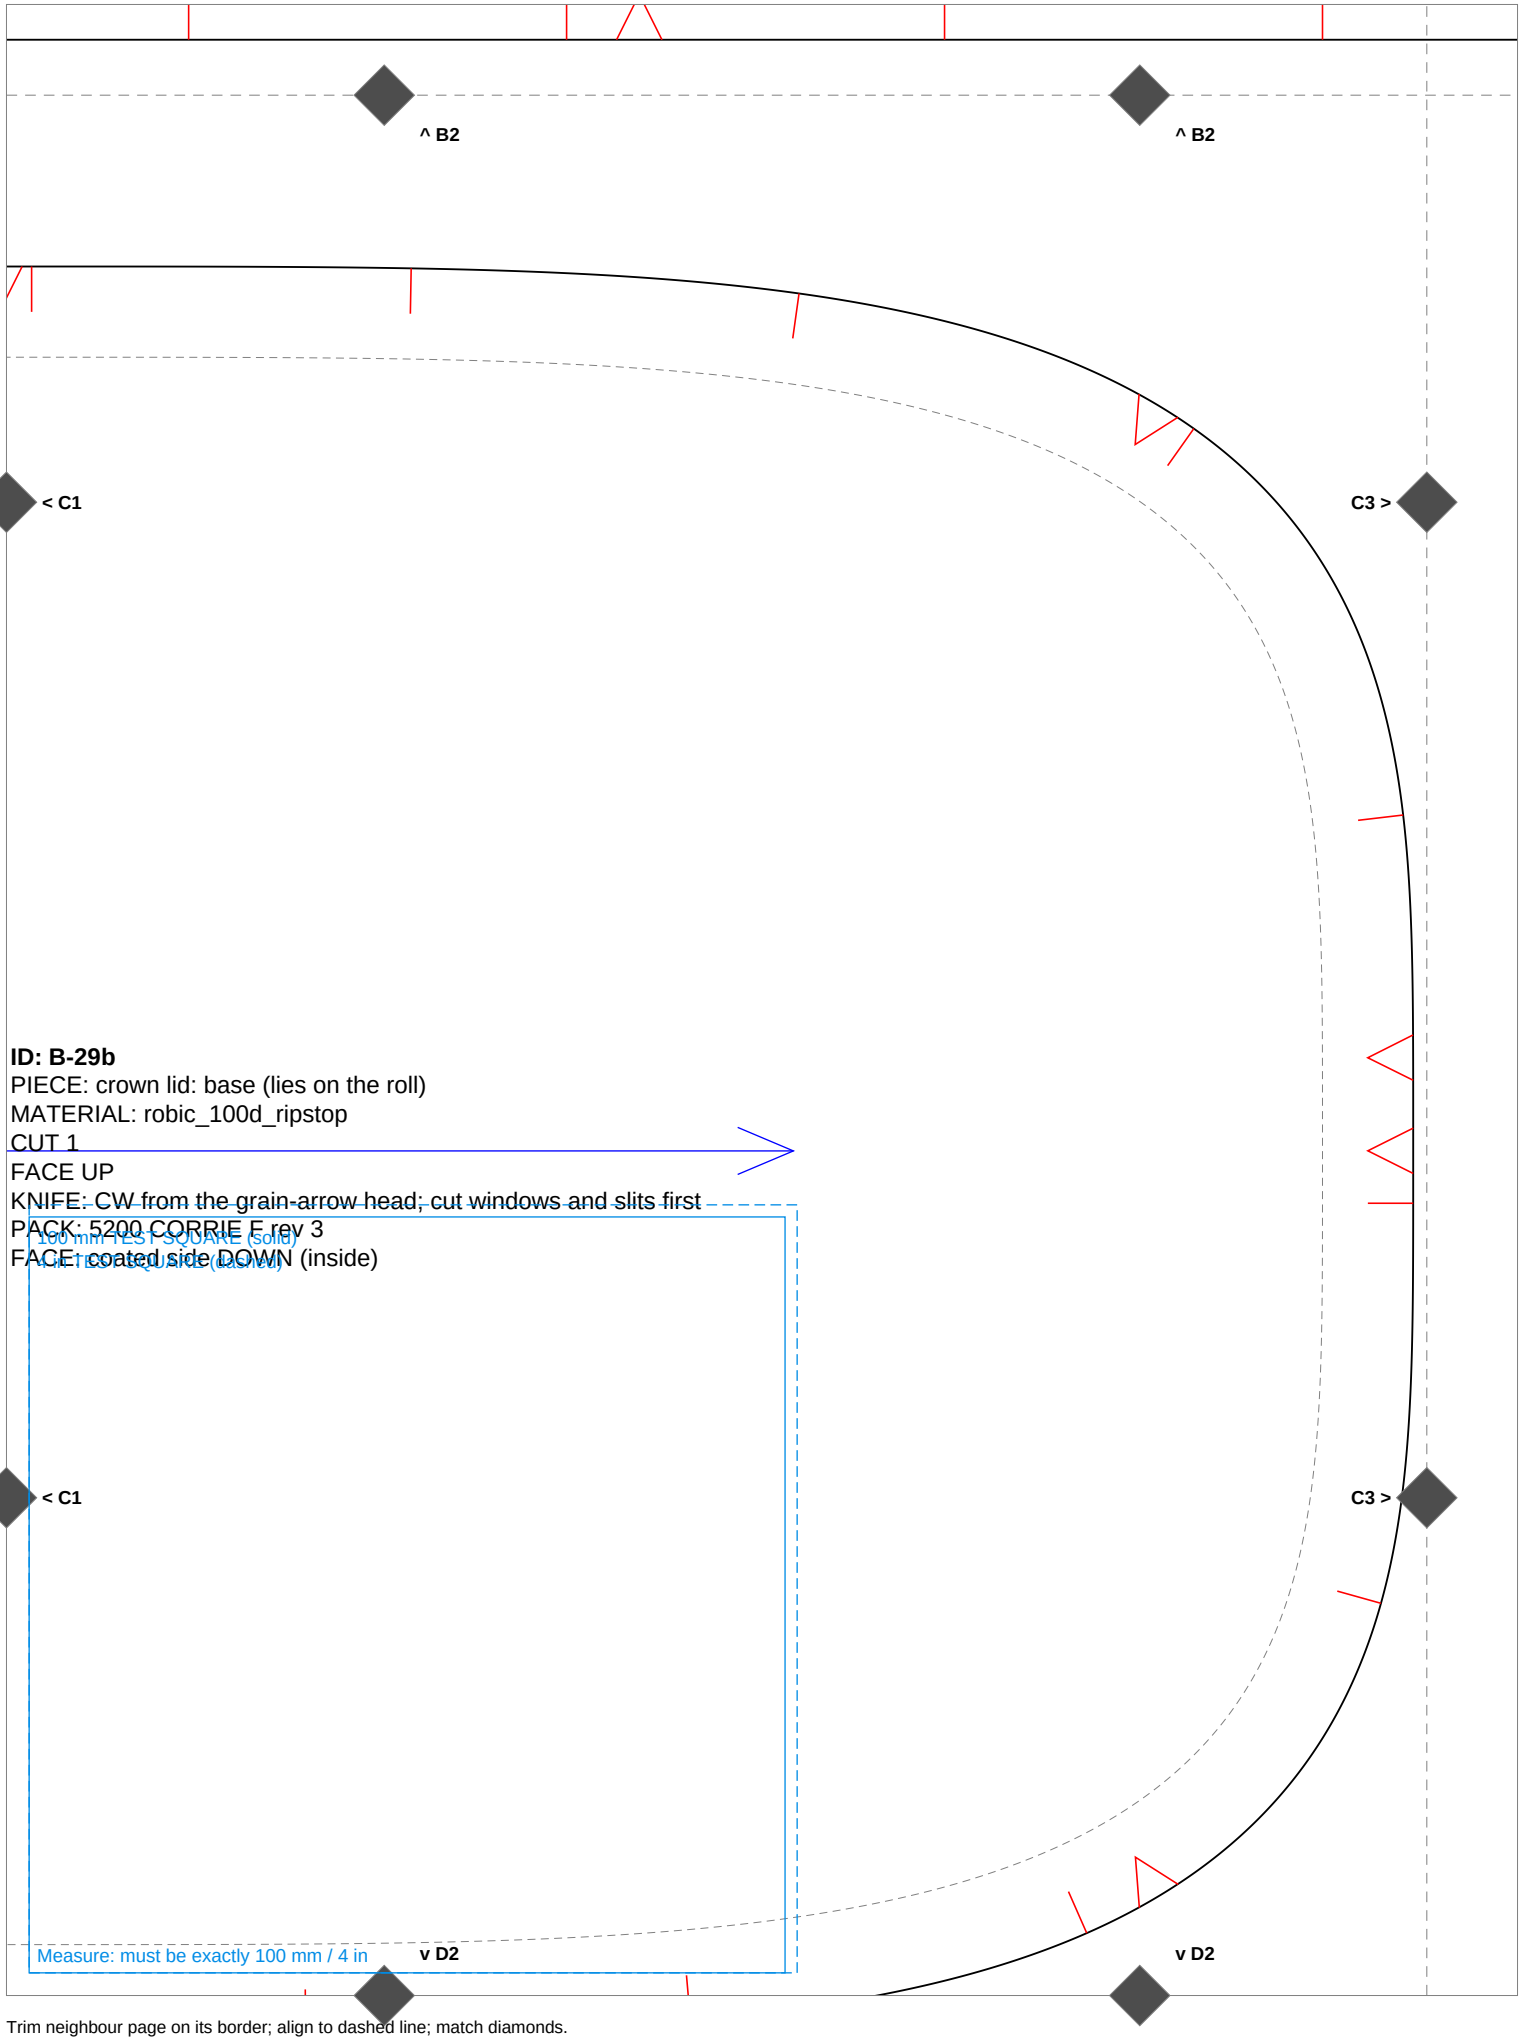

ID: B-29b
PIECE: crown lid: base (lies on the roll)
MATERIAL: robic_100d_ripstop
CUT 1
FACE UP
KNIFE: CW from the grain-arrow head; cut windows and slits first
PACK: 5200 CORRIE F rev 3
FACE: coated side DOWN (inside)


Trim neighbour page on its border; align to dashed line; match diamonds.

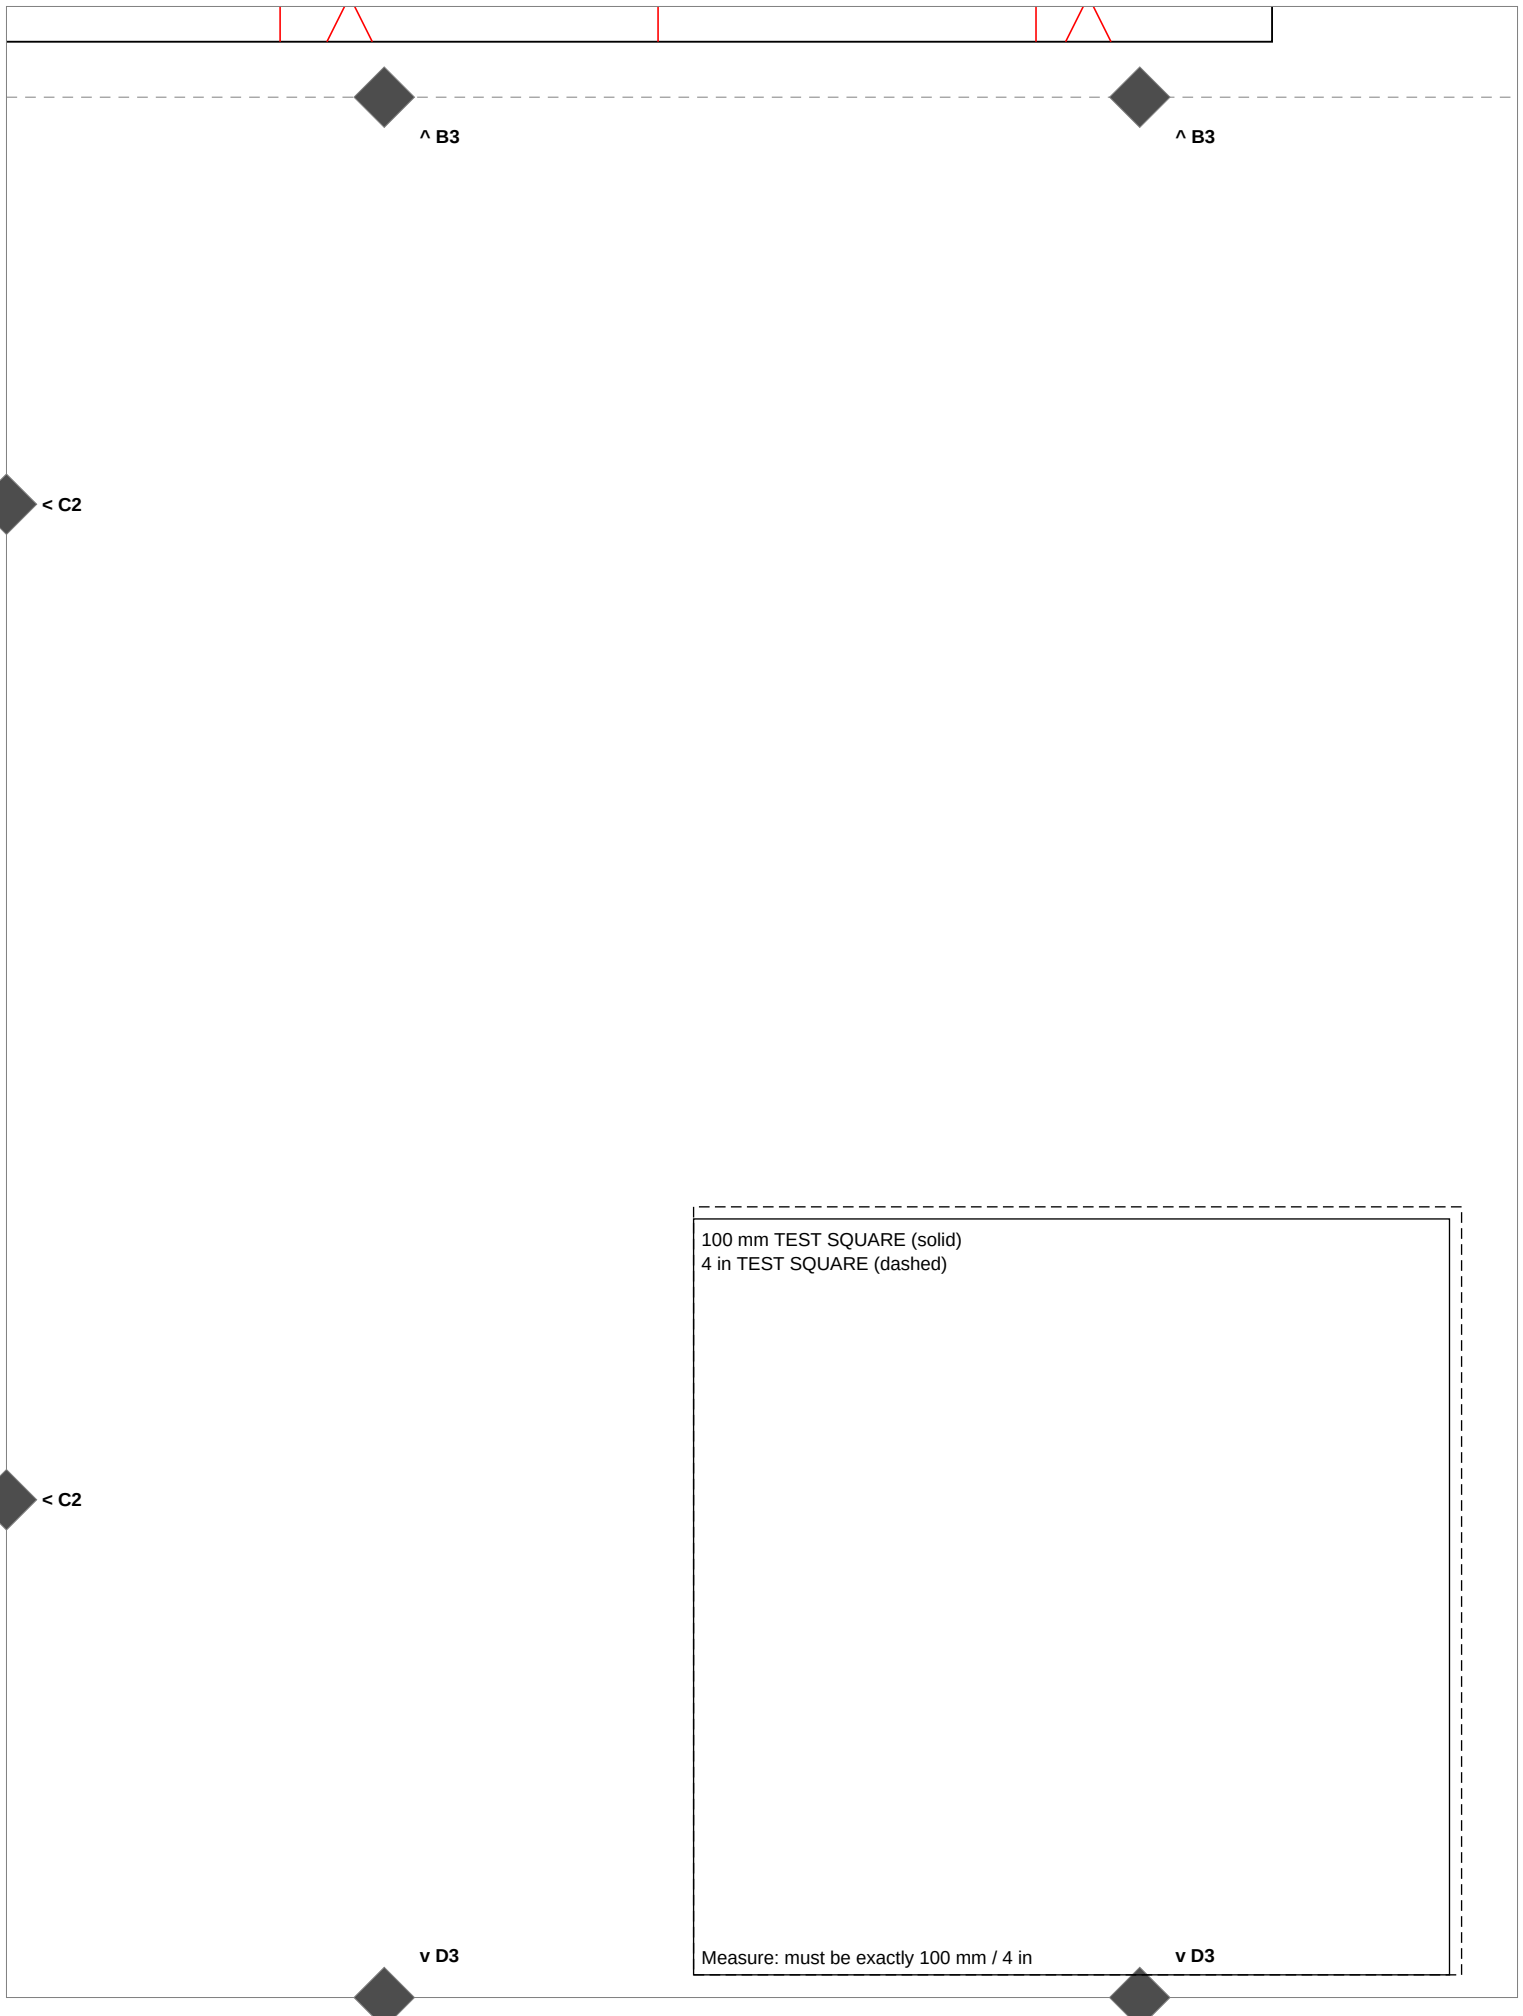
^ B3
^ B3
< C2
100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
< C2
Measure: must be exactly 100 mm / 4 in
v D3
v D3

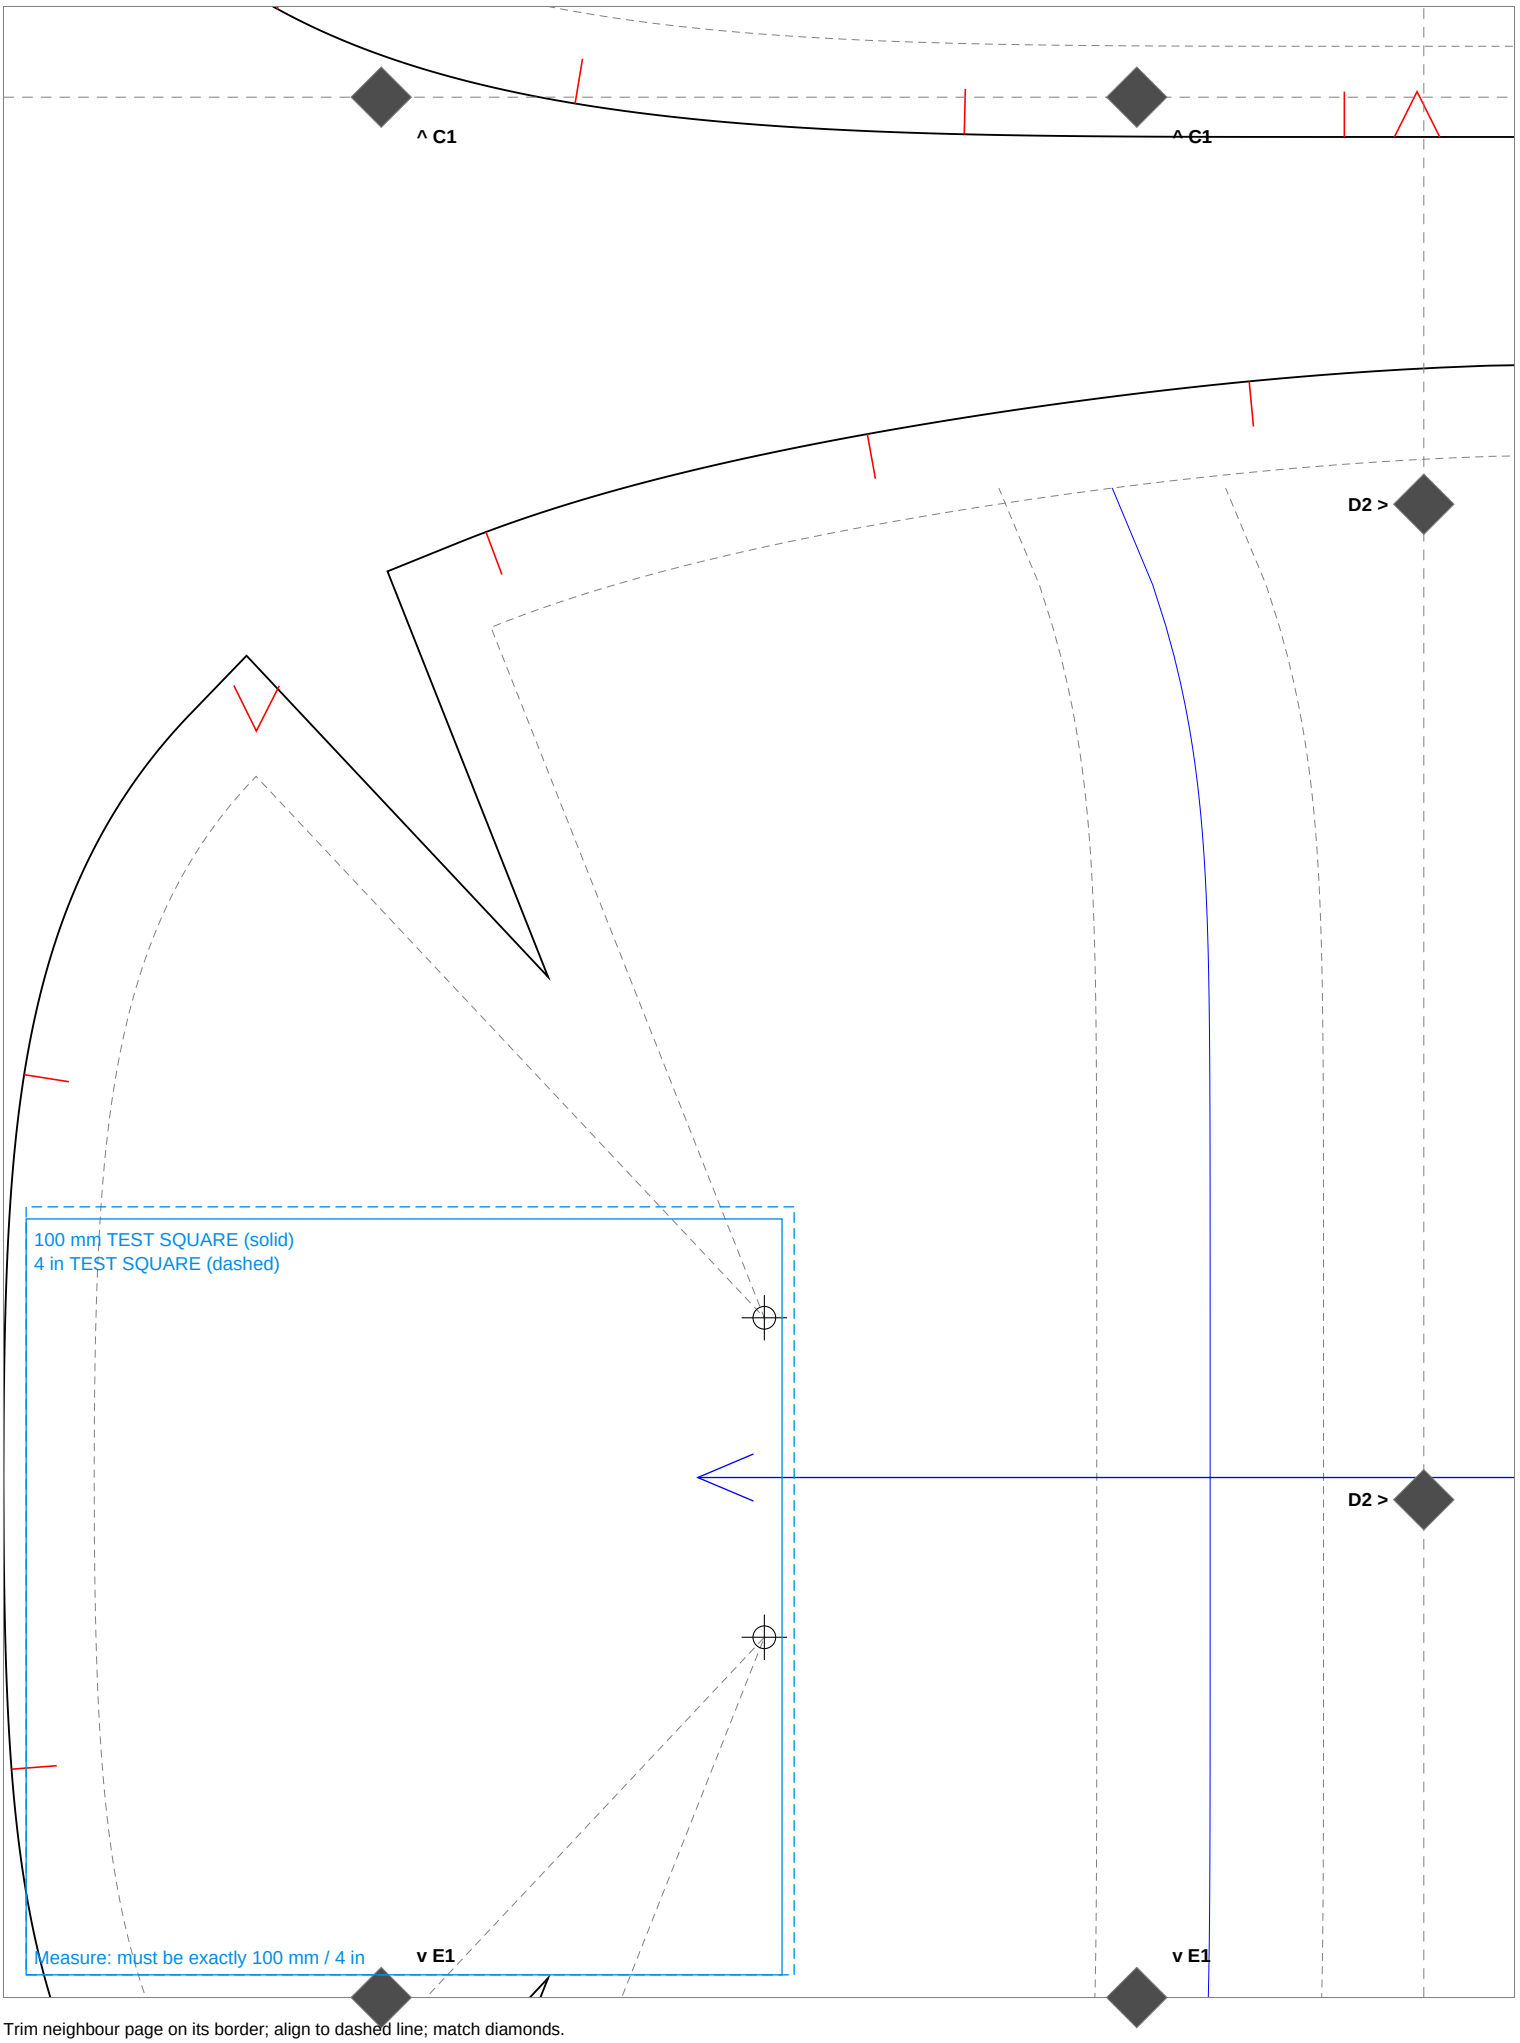

Trim neighbour page on its border; align to dashed line; match diamonds.

PRINT AT 100% / ACTUAL SIZE - check test square

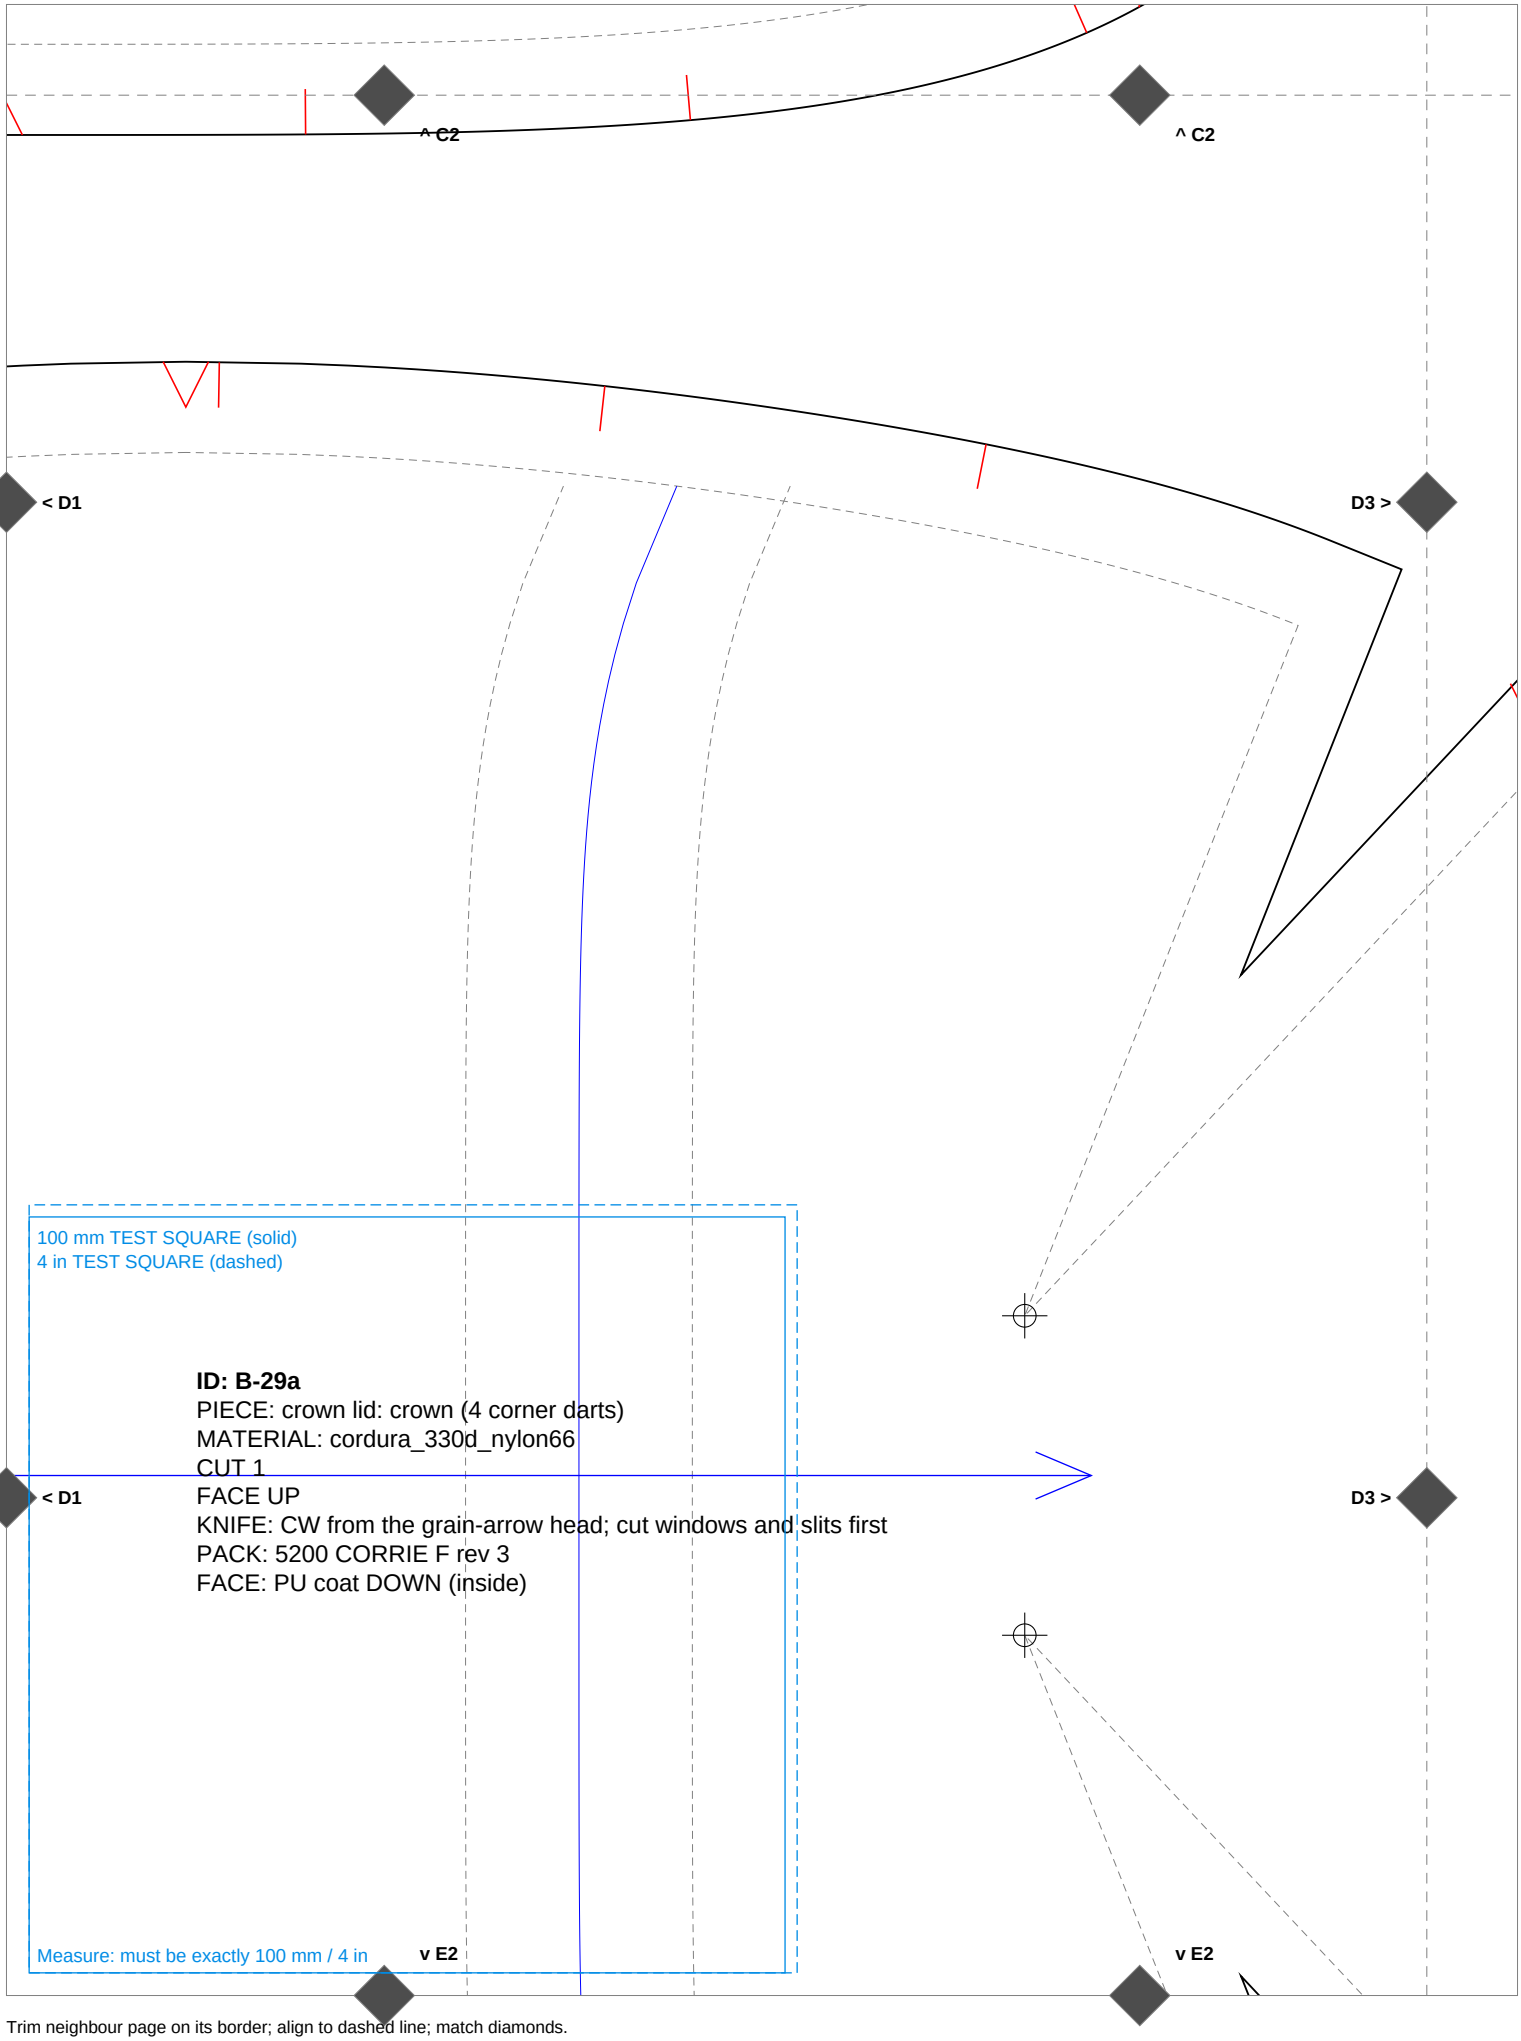


Trim neighbour page on its border; align to dashed line; match diamonds.

^ C3

^ C3

< D2

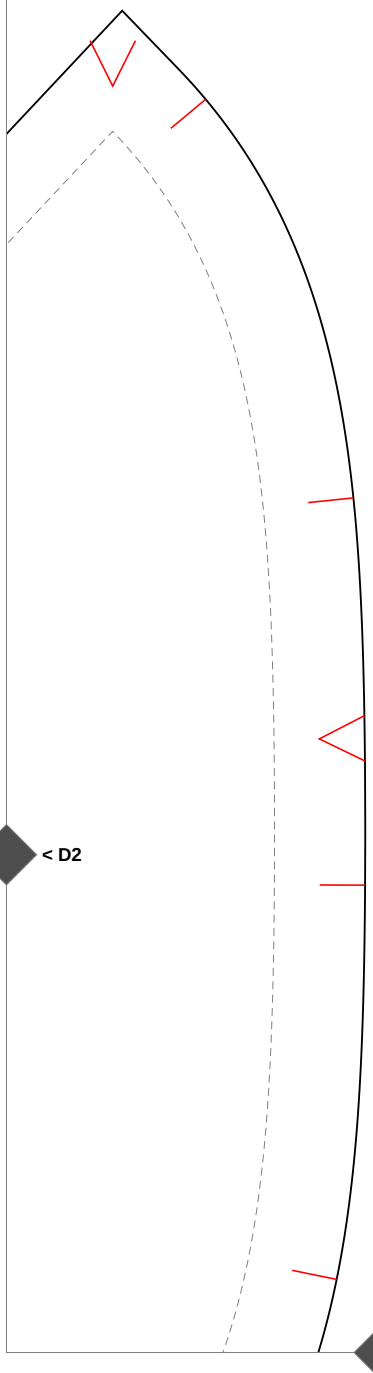


< D2


100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)


Measure: must be exactly 100 mm / 4 in

v E3

v E3

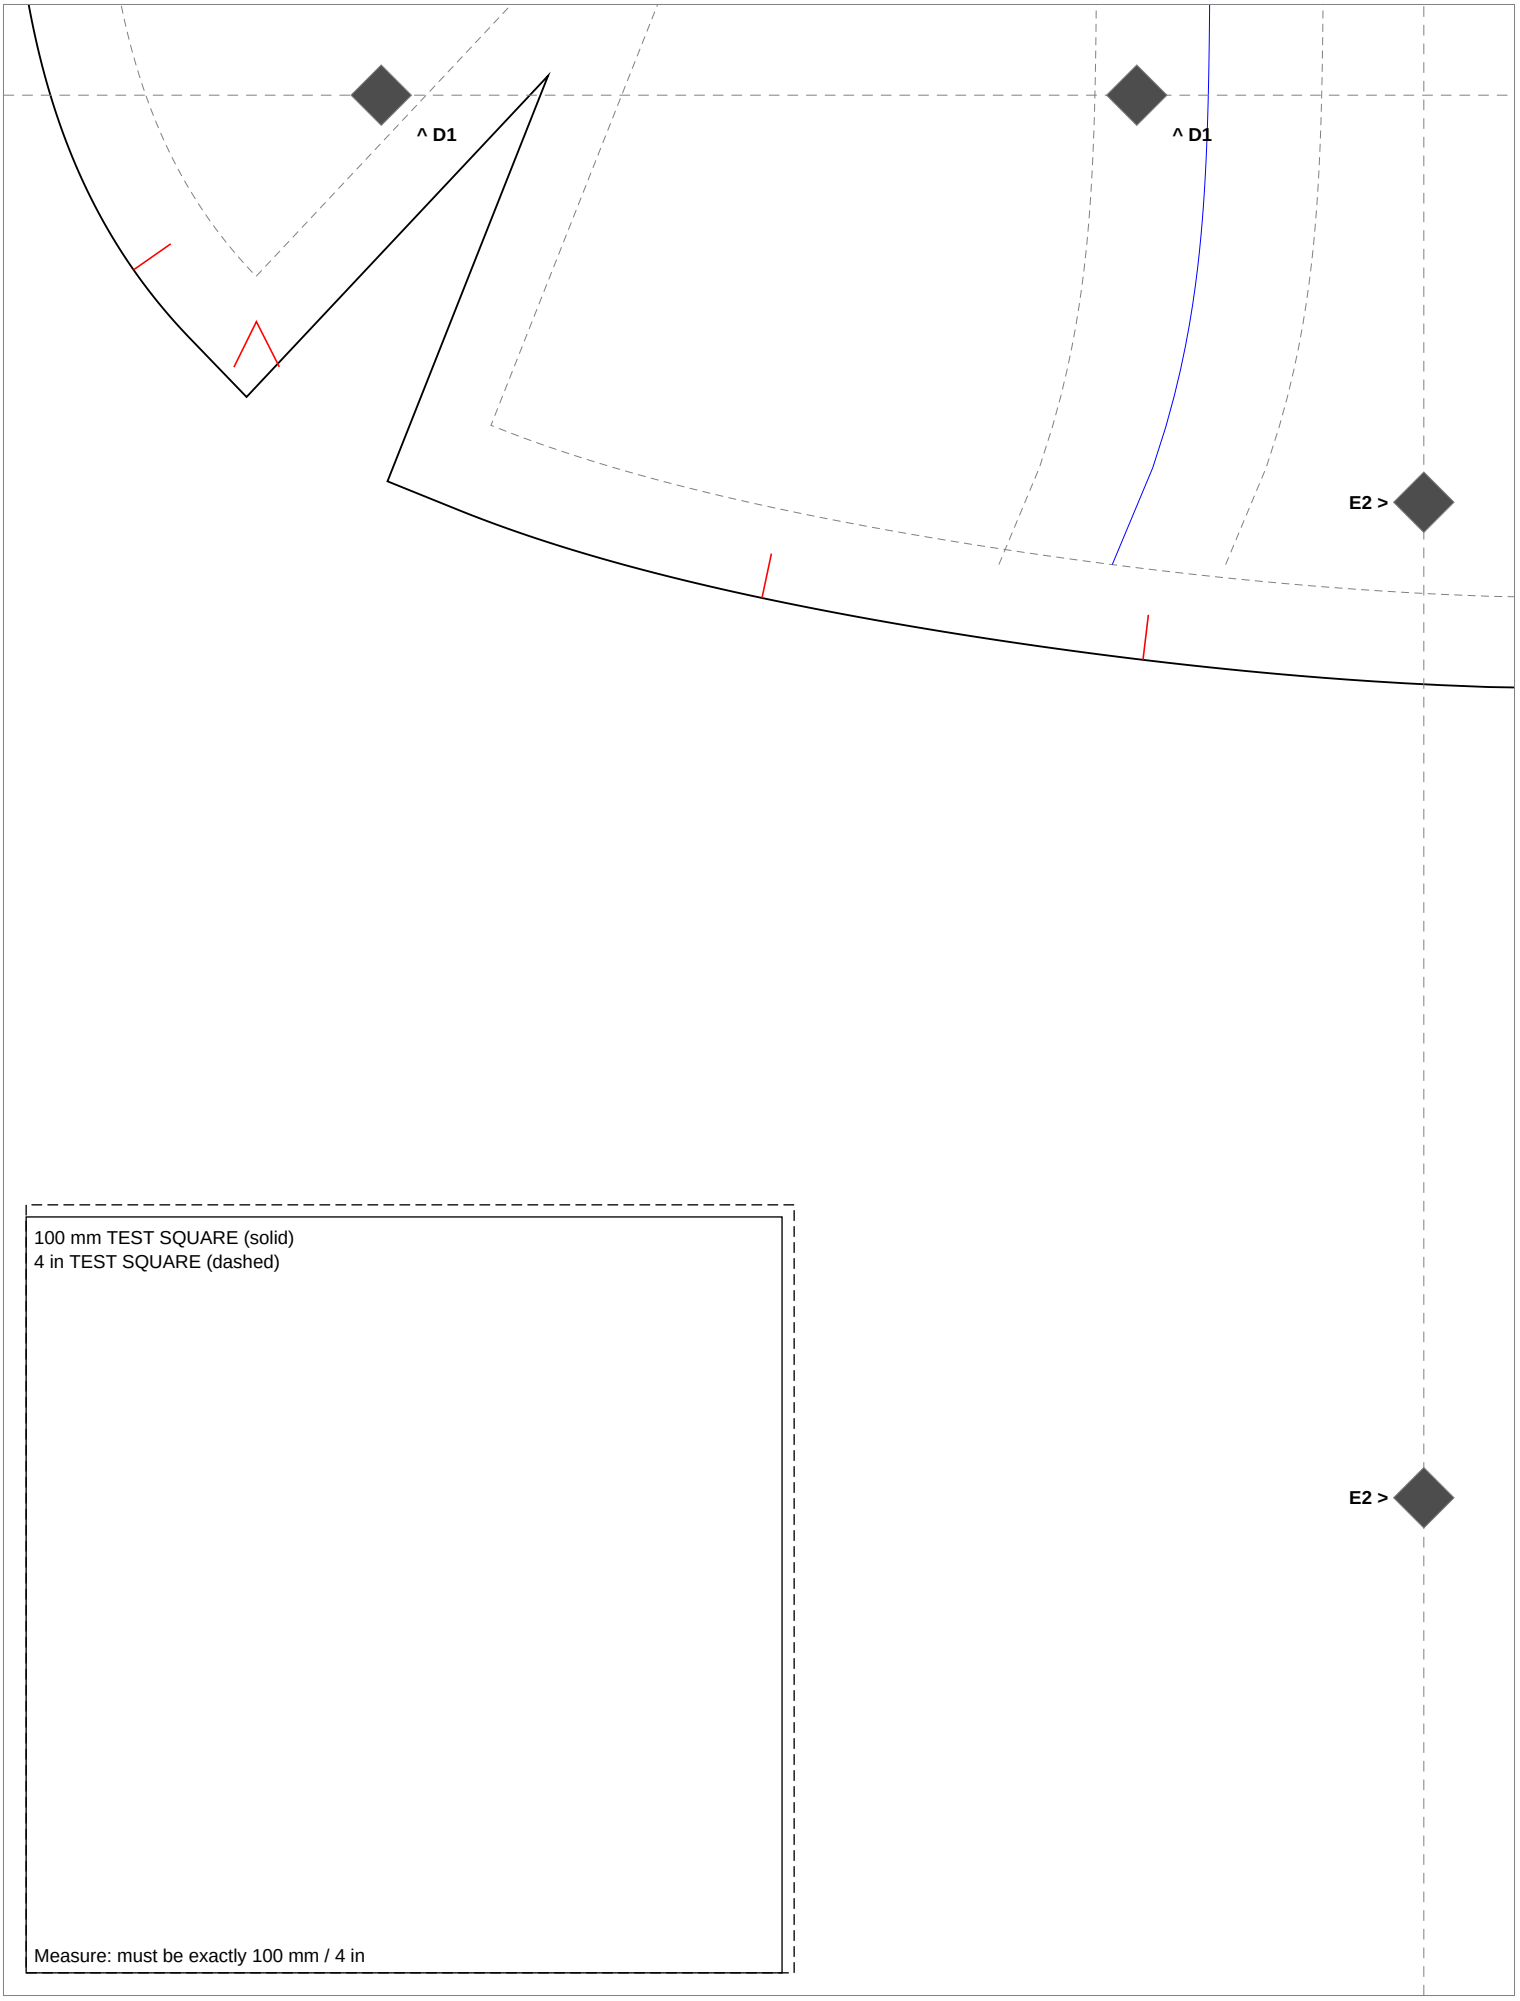
^ D1
^ D1
E2 >
E2 >
100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
Measure: must be exactly 100 mm / 4 in

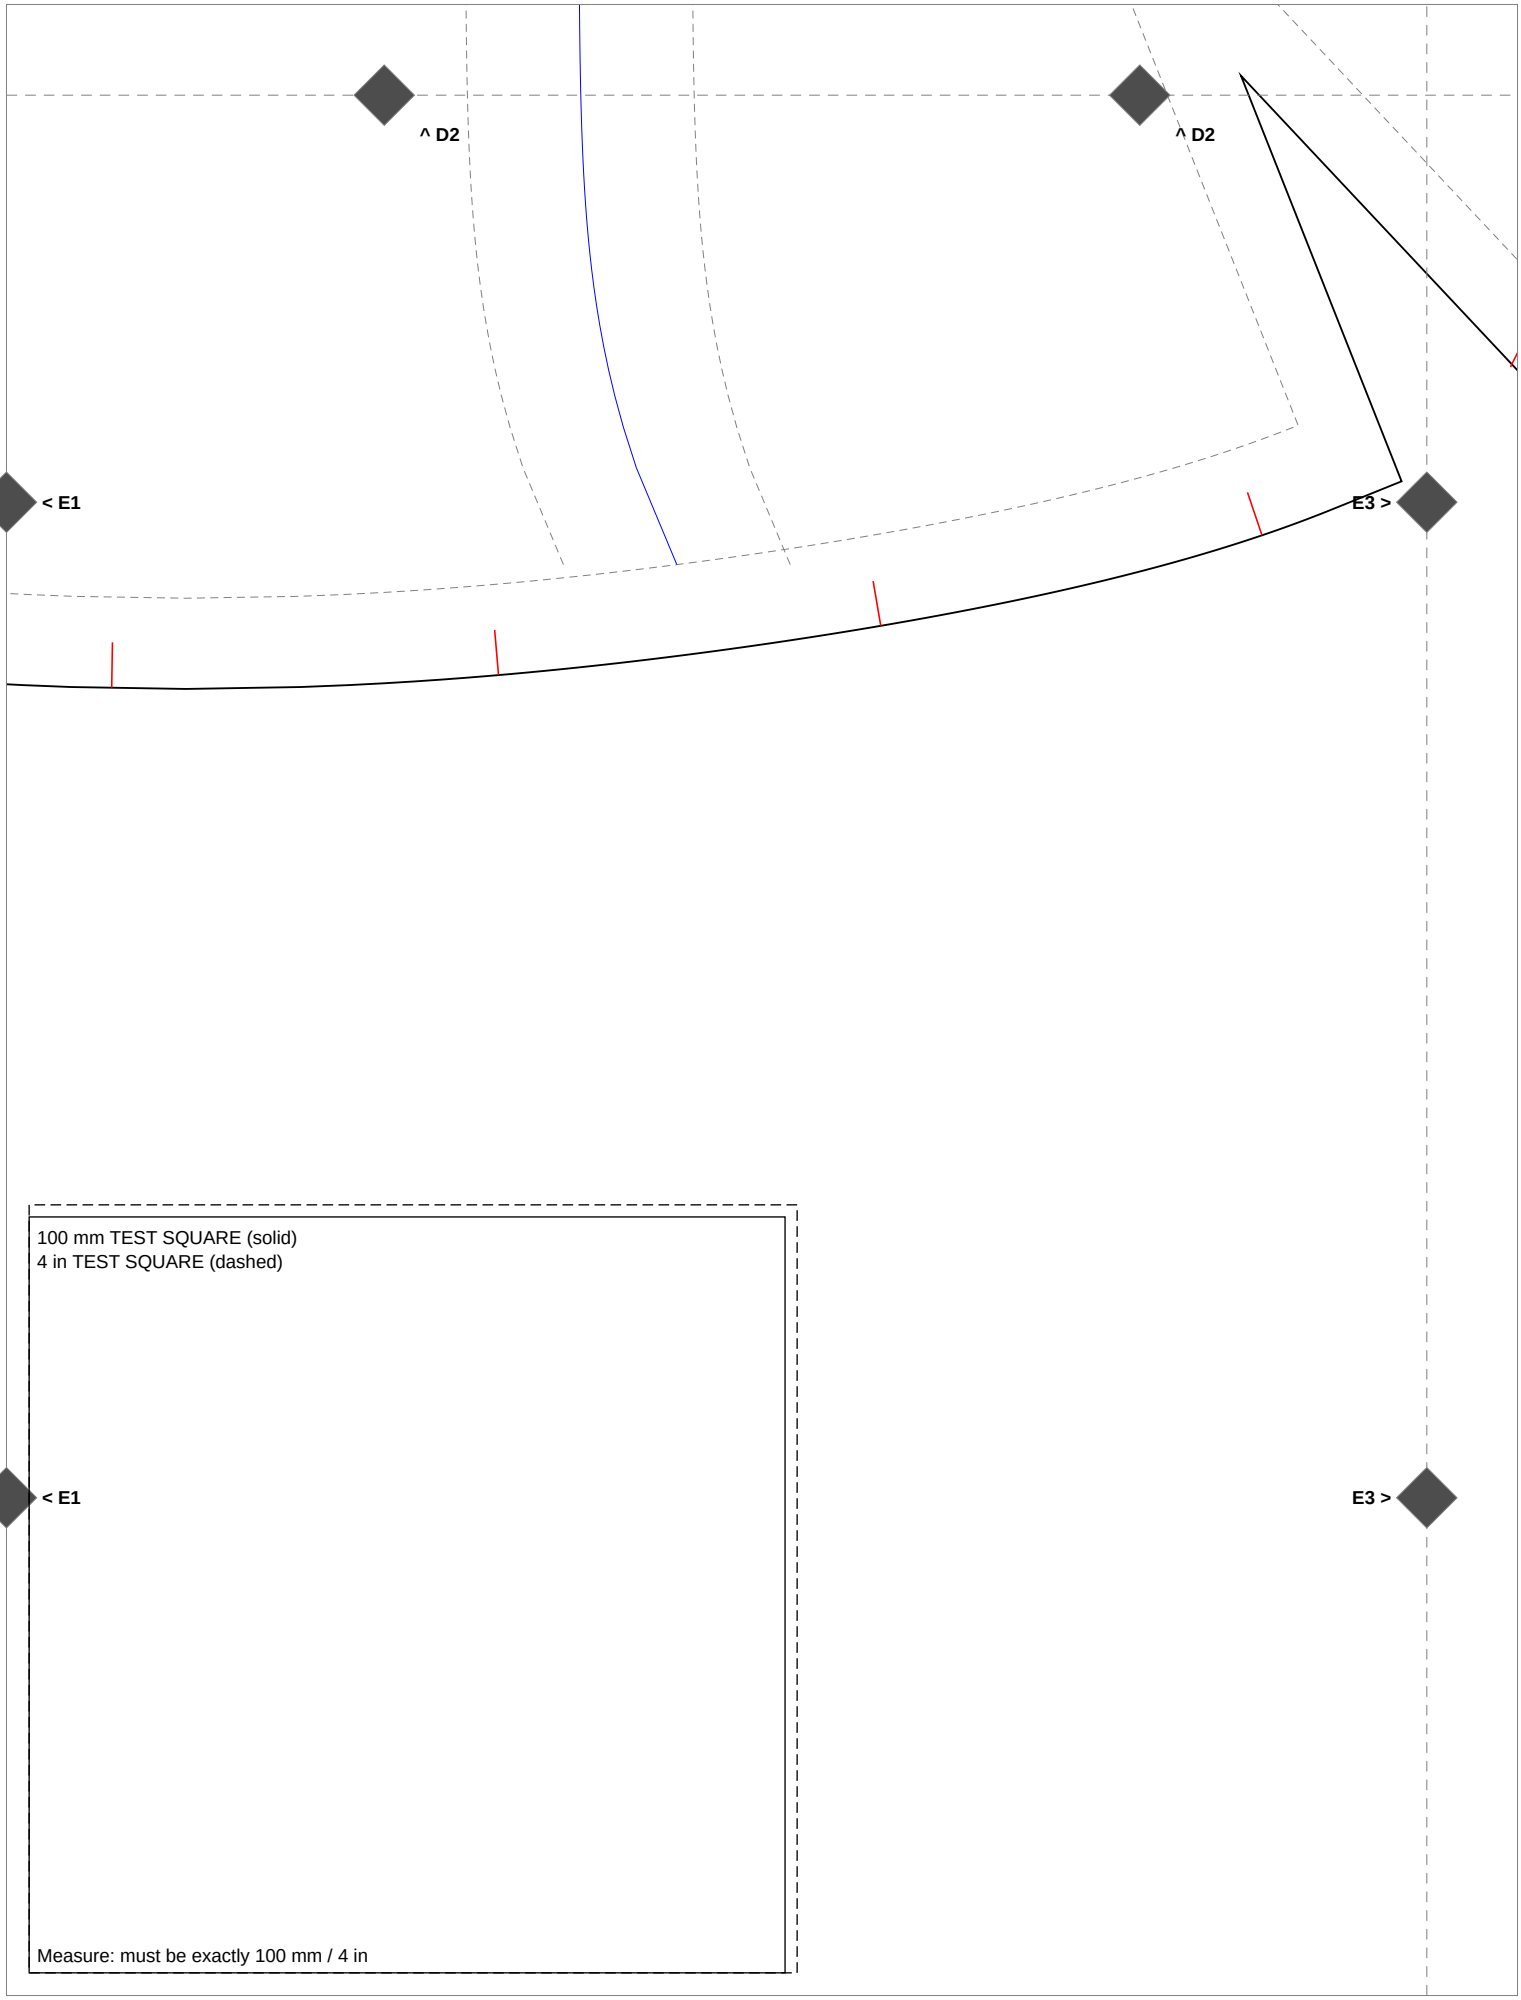
^ D2
^ D2
< E1
E3 >
100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
< E1
E3 >
Measure: must be exactly 100 mm / 4 in

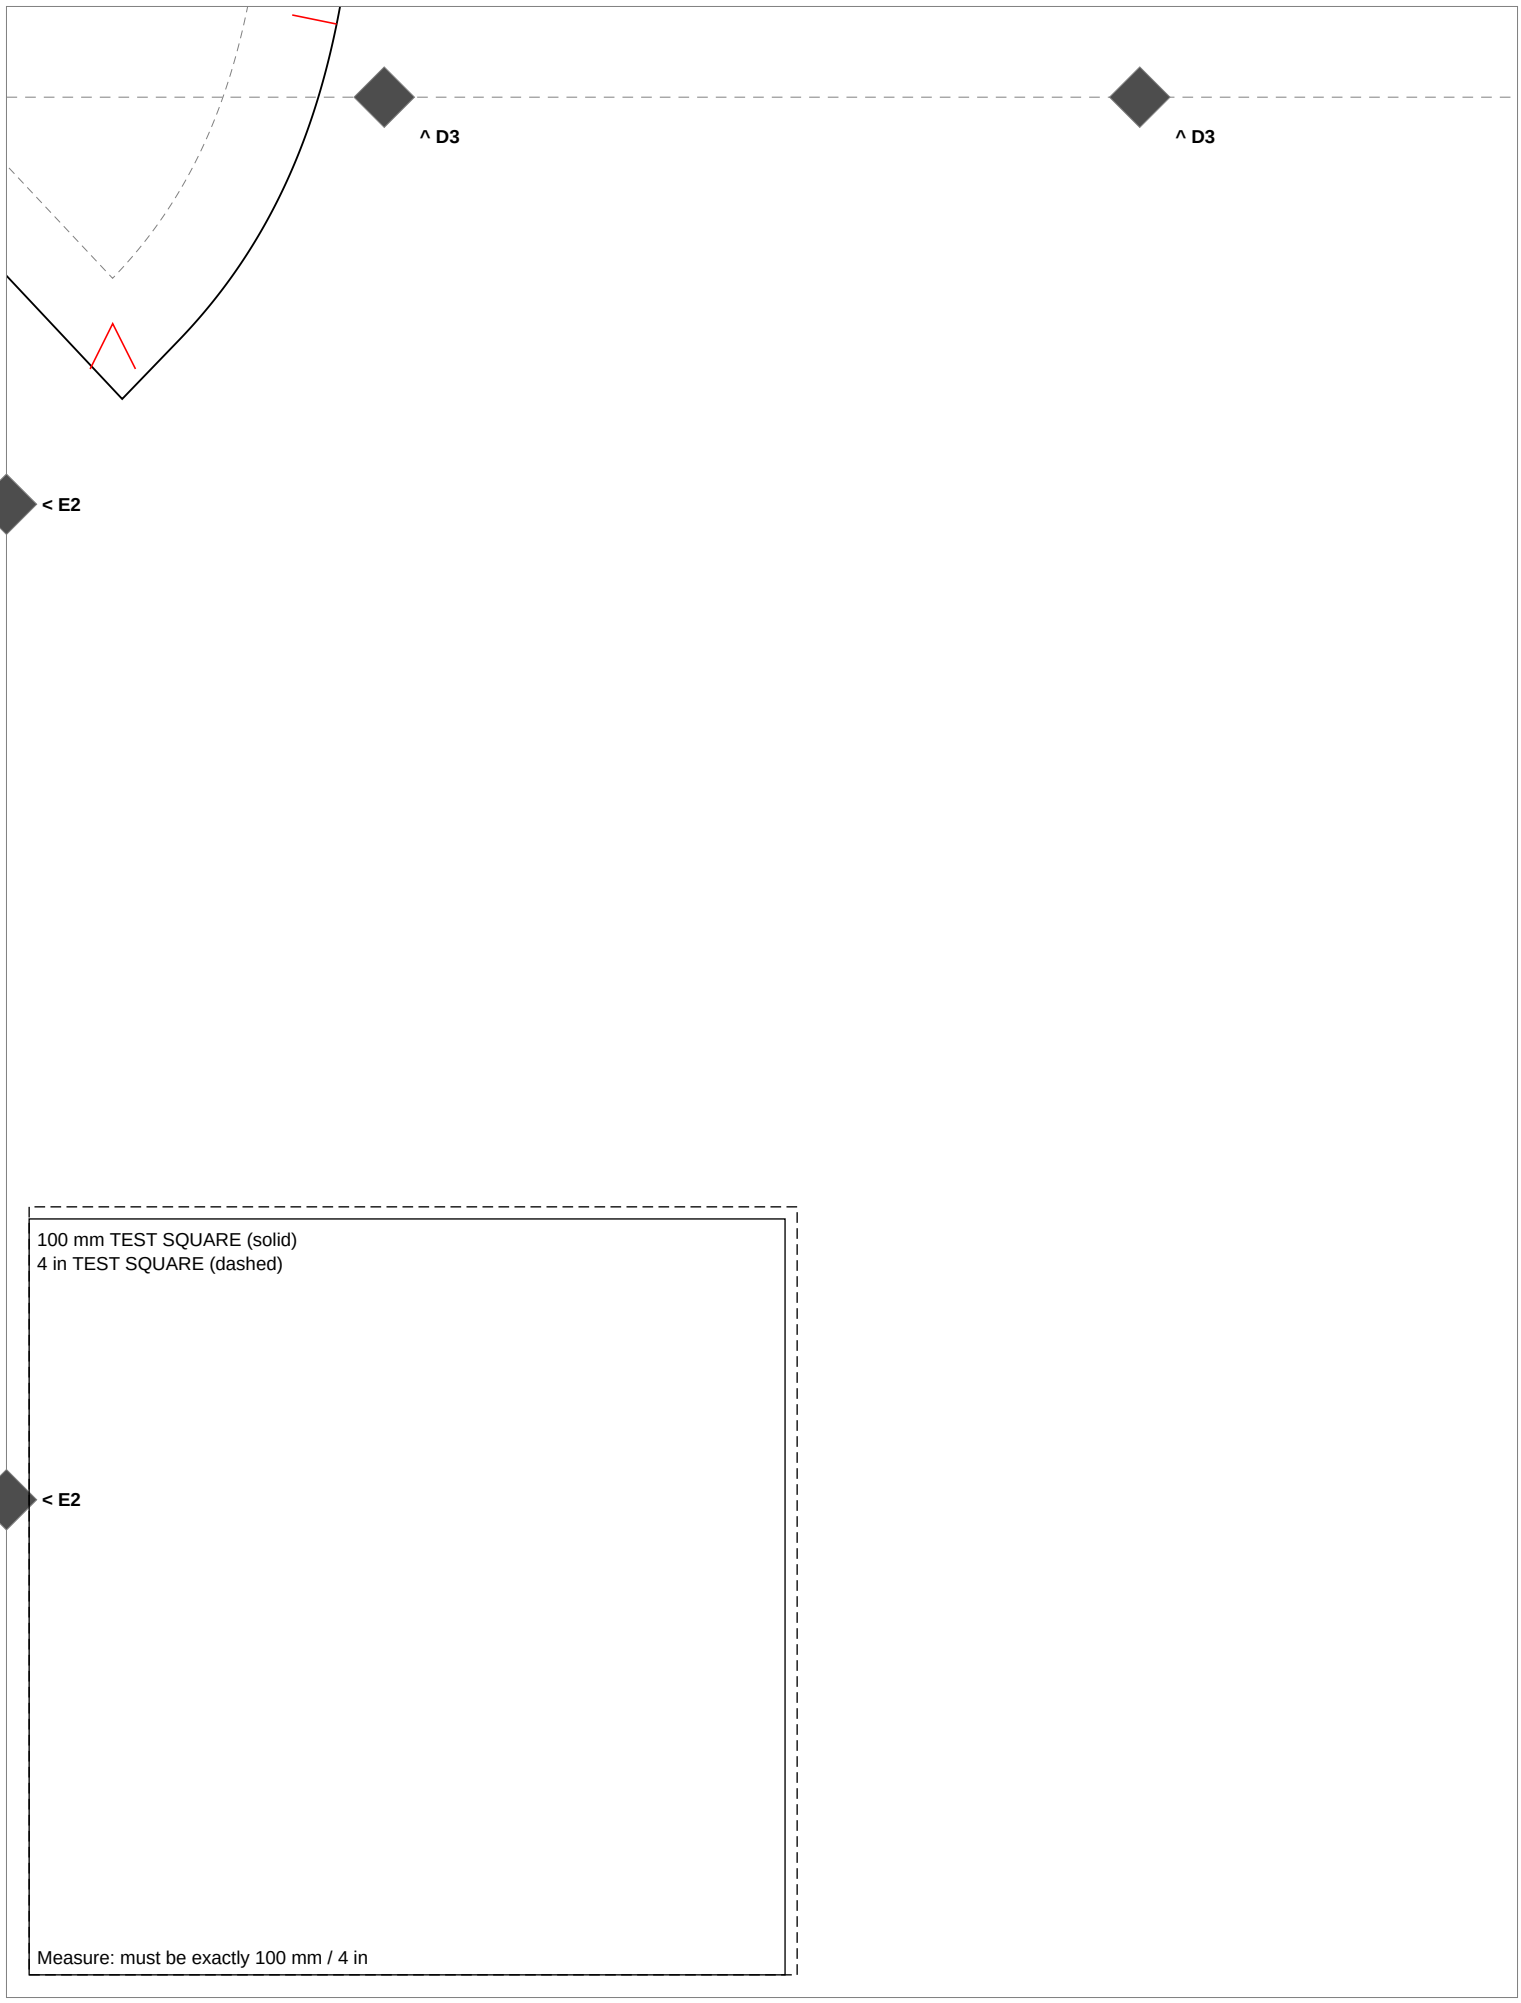
^ D3
^ D3
< E2
100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
< E2
Measure: must be exactly 100 mm / 4 in

CORRIE F rev 3 Step 6: B-29 crown lid: piece NOTES (full text)

B-29f crown lid: camo corner cap (overlay)

print UP; laid on B-29e, caught in the zip and base seams, ends turned 8 mm

B-29g crown lid: strap channel

long edges turned 8 mm and topstitched on the crown line; ends in the crown | wall seam