Pack 5200 bag-to-frame attachment: sewn parts, 1:1 - PAGE MAP

Paper: LETTER 215.9 x 279.4 mm, 4 rows x 3 cols = 12 tiles (+ this map = 13 pages).

Print at 100% / ACTUAL SIZE (no 'fit to page'). Verify the 100 mm and 4 in squares.

Assemble: rows A.. top to bottom, columns 1.. left to right; overlap 12 mm.

Lines: solid = CUT, grey dashed = SEW, red = notches, blue arrow = grain, circle+cross = drill hole.

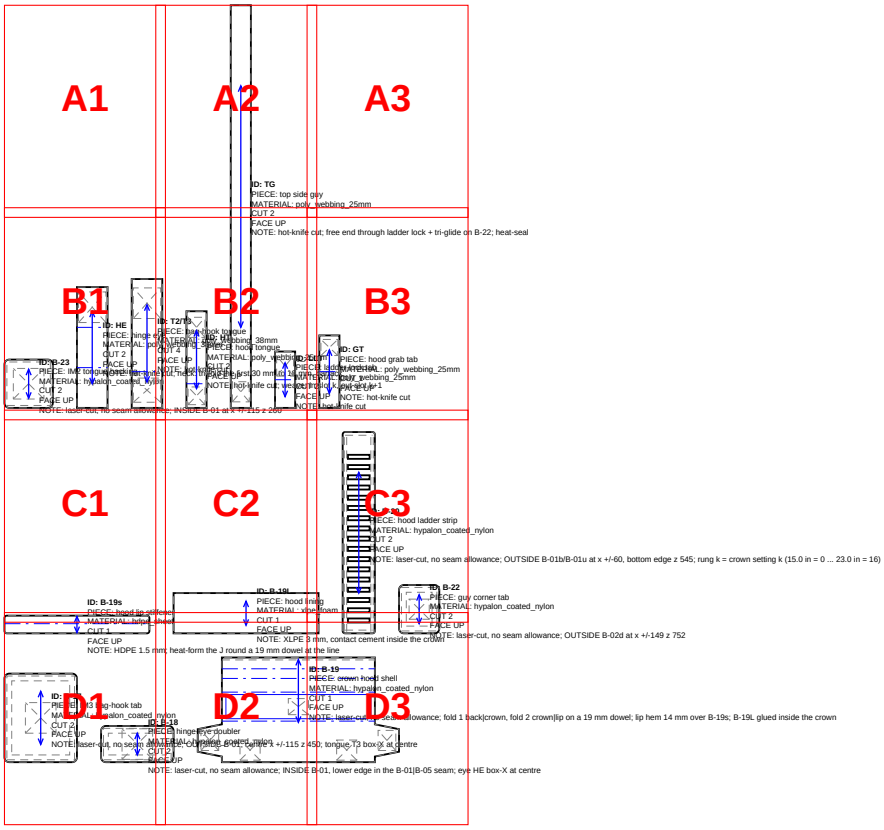

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

A2 >

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

A2 >

Measure: must be exactly 100 mm / 4 in **v B1**

v B1

< A1

A3 >

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

< A1

A3 >

Measure: must be exactly 100 mm / 4 in

v B2

v B2

ID: TG
PIECE: top side guy
MATERIAL: poly_webbing_25mm
CUT 2
FACE UP
NOTE: hot-knife cut; free end through ladder lock + tri-glide on B-2

PRINT AT 100% / ACTUAL SIZE - check test square

< A2

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

< A2

Measure: must be exactly 100 mm / 4 in

v B3

v B3

^ A1

^ A1

B2 >

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

ID: HE
PIECE: hinge eye
MATERIAL: poly_webbing_38mm
CUT 2
FACE UP
NOTE: hot-knife cut; neck: tri-fold the first 30 mm to 18 mm, bar

ID: T2/T3
PIECE: bag-ho
MATERIAL: po
CUT 4
FACE UP
NOTE: hot-knif

B2 >

ID: B-23
PIECE: IM2 tongue backing
MATERIAL: hypalon_coated_nylon
CUT 2
FACE UP
NOTE: laser-cut, no seam allowance; INSIDE B-01 at x +/-115 z 260

Measure: must be exactly 100 mm / 4 in

v C1

v C1

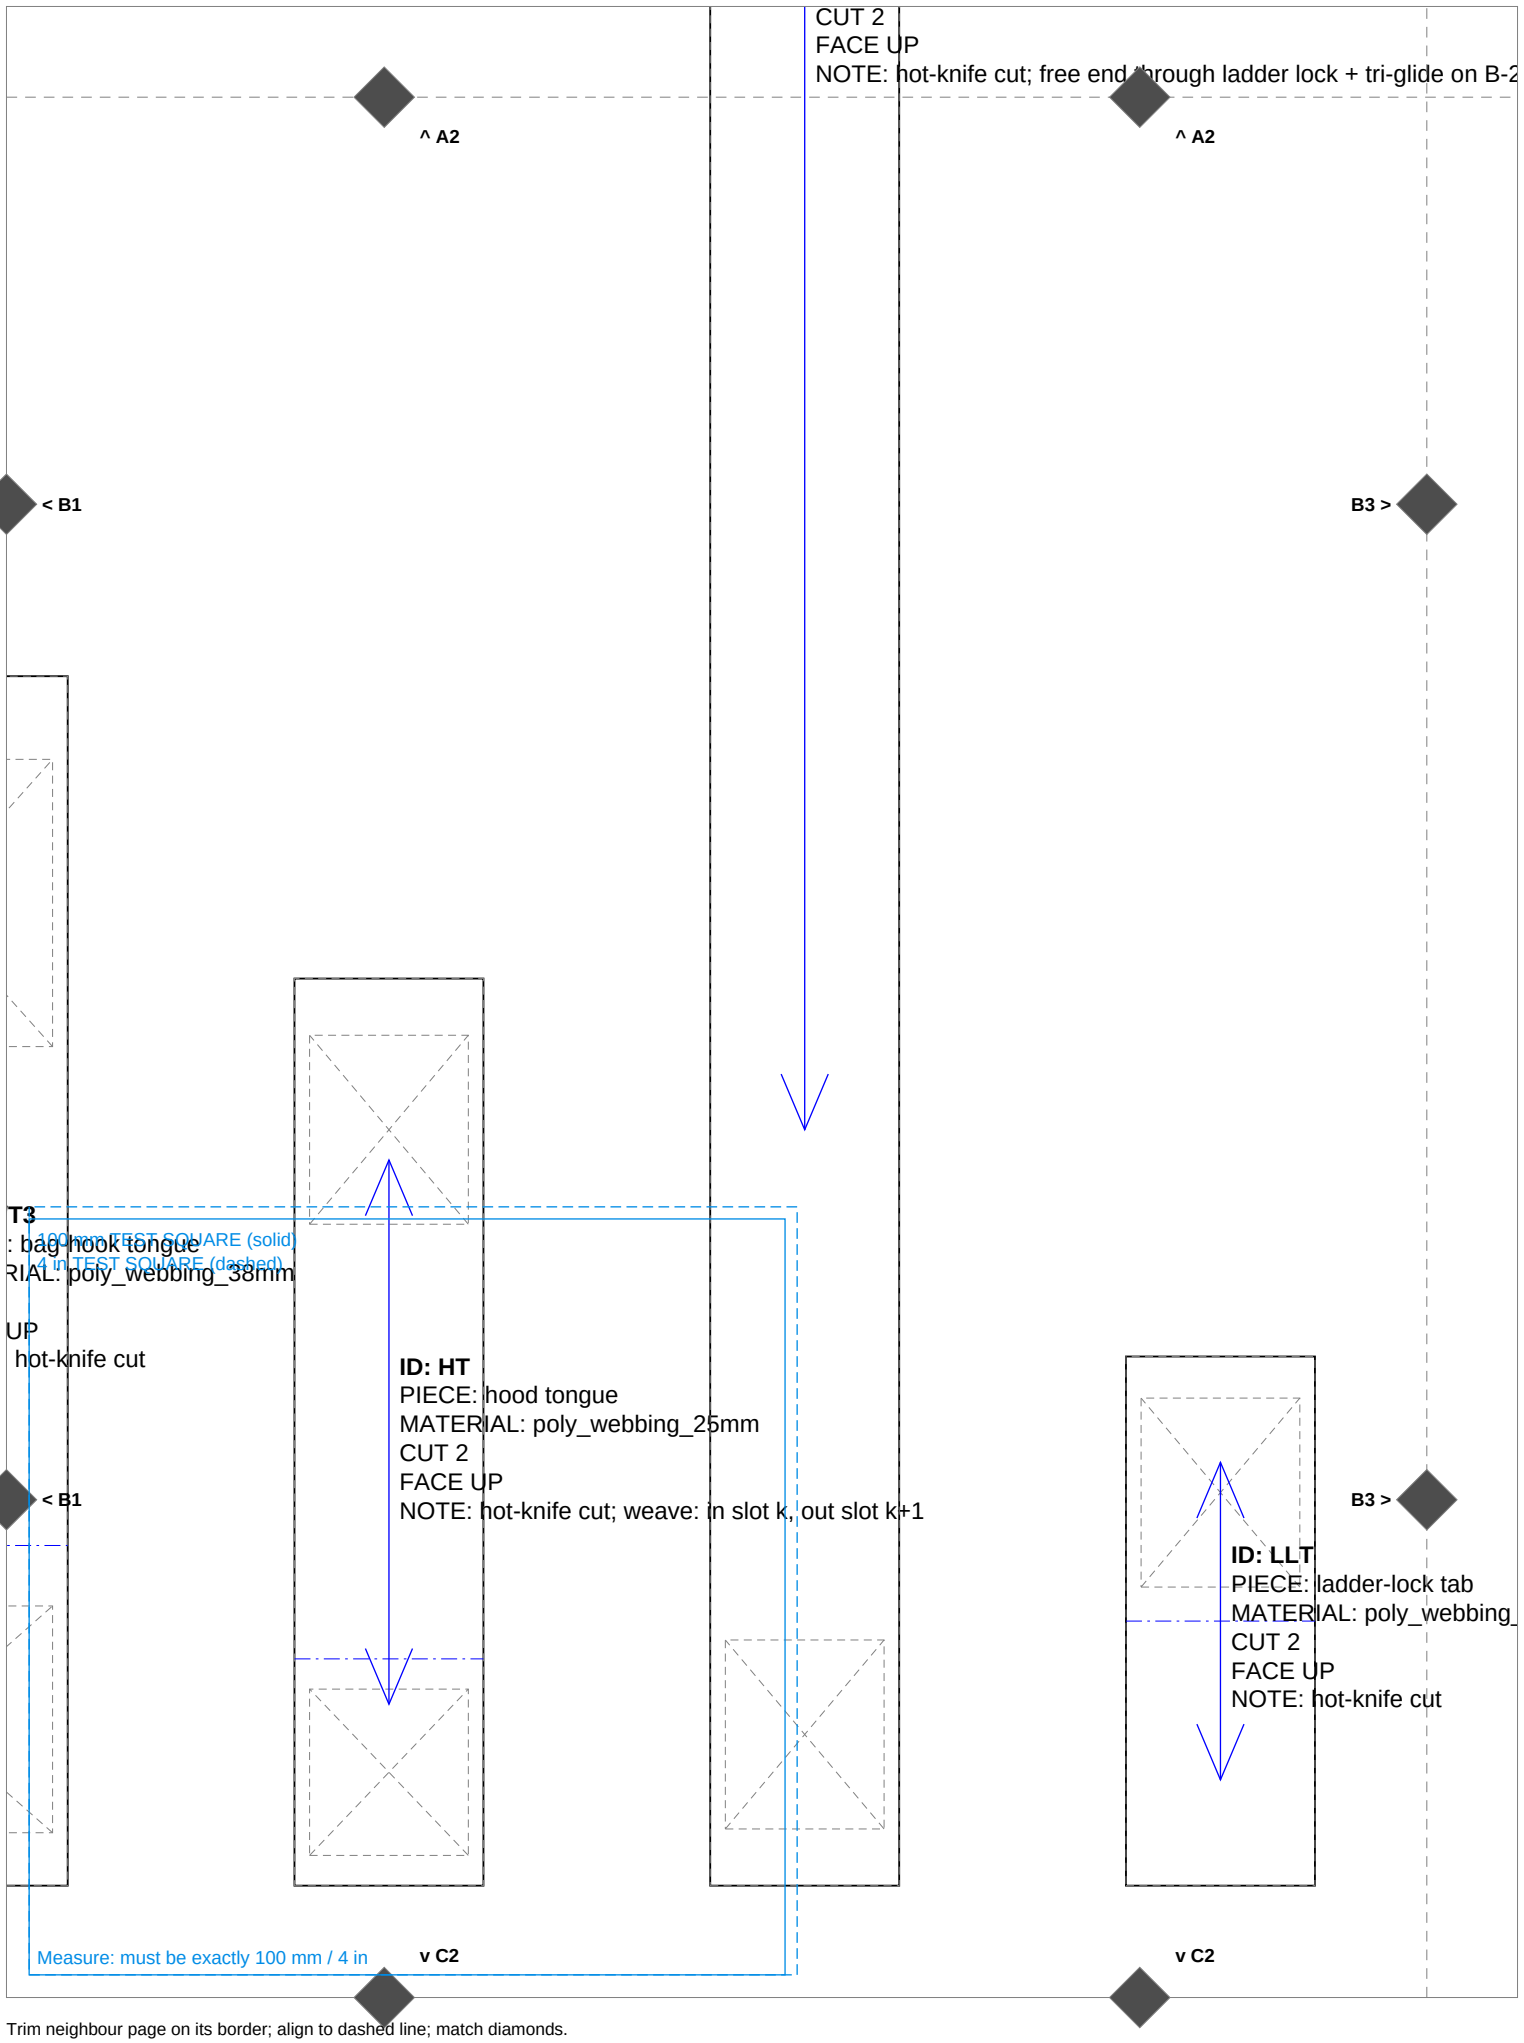
CUT 2
FACE UP
NOTE: hot-knife cut; free end through ladder lock + tri-glide on B-2
^ A2
^ A2
< B1
B3 >
T3
: bag hook tongue
RIAL: poly_webbing_38mm
UP
hot-knife cut
100mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
ID: HT
PIECE: hood tongue
MATERIAL: poly_webbing_25mm
CUT 2
FACE UP
NOTE: hot-knife cut; weave: in slot k, out slot k+1
< B1
B3 >
ID: LLT
PIECE: ladder-lock tab
MATERIAL: poly_webbing_
CUT 2
FACE UP
NOTE: hot-knife cut
Measure: must be exactly 100 mm / 4 in
v C2
v C2

^ A3

^ A3

< B2

< B2

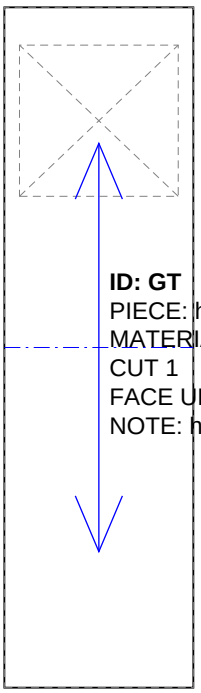

ID: GT
PIECE: hood grab tab
MATERIAL: poly_webbing_25mm
CUT 1
FACE UP
NOTE: hot-knife cut

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

v C3

v C3

PRINT AT 100% / ACTUAL SIZE - check test square

^ B1

^ B1

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

C2 >

C2 >

v D1

v D1

ID: B-19s
PIECE: hood lip stiffener

^ B2

^ B2

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

< C1

C3 >

Measure: must be exactly 100 mm / 4 in

< C1

C3 >

ID: B-19L
PIECE: hood lining
MATERIAL: xlpe_foam
CUT 1
FACE UP
NOTE: XLPE 3 mm, co[illegible]cement inside the crown

v D2

v D2

^ B3

^ B3

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

< C2

ID: B-20
PIECE: hood ladder strip
MATERIAL: hypalon_coated_nylon
CUT 2
FACE UP
NOTE: laser-cut, no seam allowance; OUTSIDE B-01b/B-01u at x +/-60, bottom edge z 545; run

< C2

ID: B-22
PIECE: guy corner tab
MATERIAL: hypalon_coated_nylon
CUT 2
FACE UP
NOTE: laser-cut, no seam allowance; OUT

v D3

ID: B-19s
PIECE: hood lip stiffener
MATERIAL: hdpe_sheet
CUT 1
FACE UP
NOTE: HDPE 1.5 mm; heat-form the J round a 19 mm dowel at the line

^ C1

^ C1

D2 >

ID: B-17
PIECE: IM3 bag-hook tab
MATERIAL: hypalon_coated_nylon
CUT 2
FACE UP
NOTE: laser-cut, no seam allowance; OUTSIDE B-01, centre x +/-115 z 450; tongue T3 box-X at centre

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

Measure: must be exactly 100 mm / 4 in

ID: B-18
PIECE: hinge-eye doubl
MATERIAL: hypalon_co
CUT 2
FACE UP
NOTE: laser-cut, no sea

D2 >

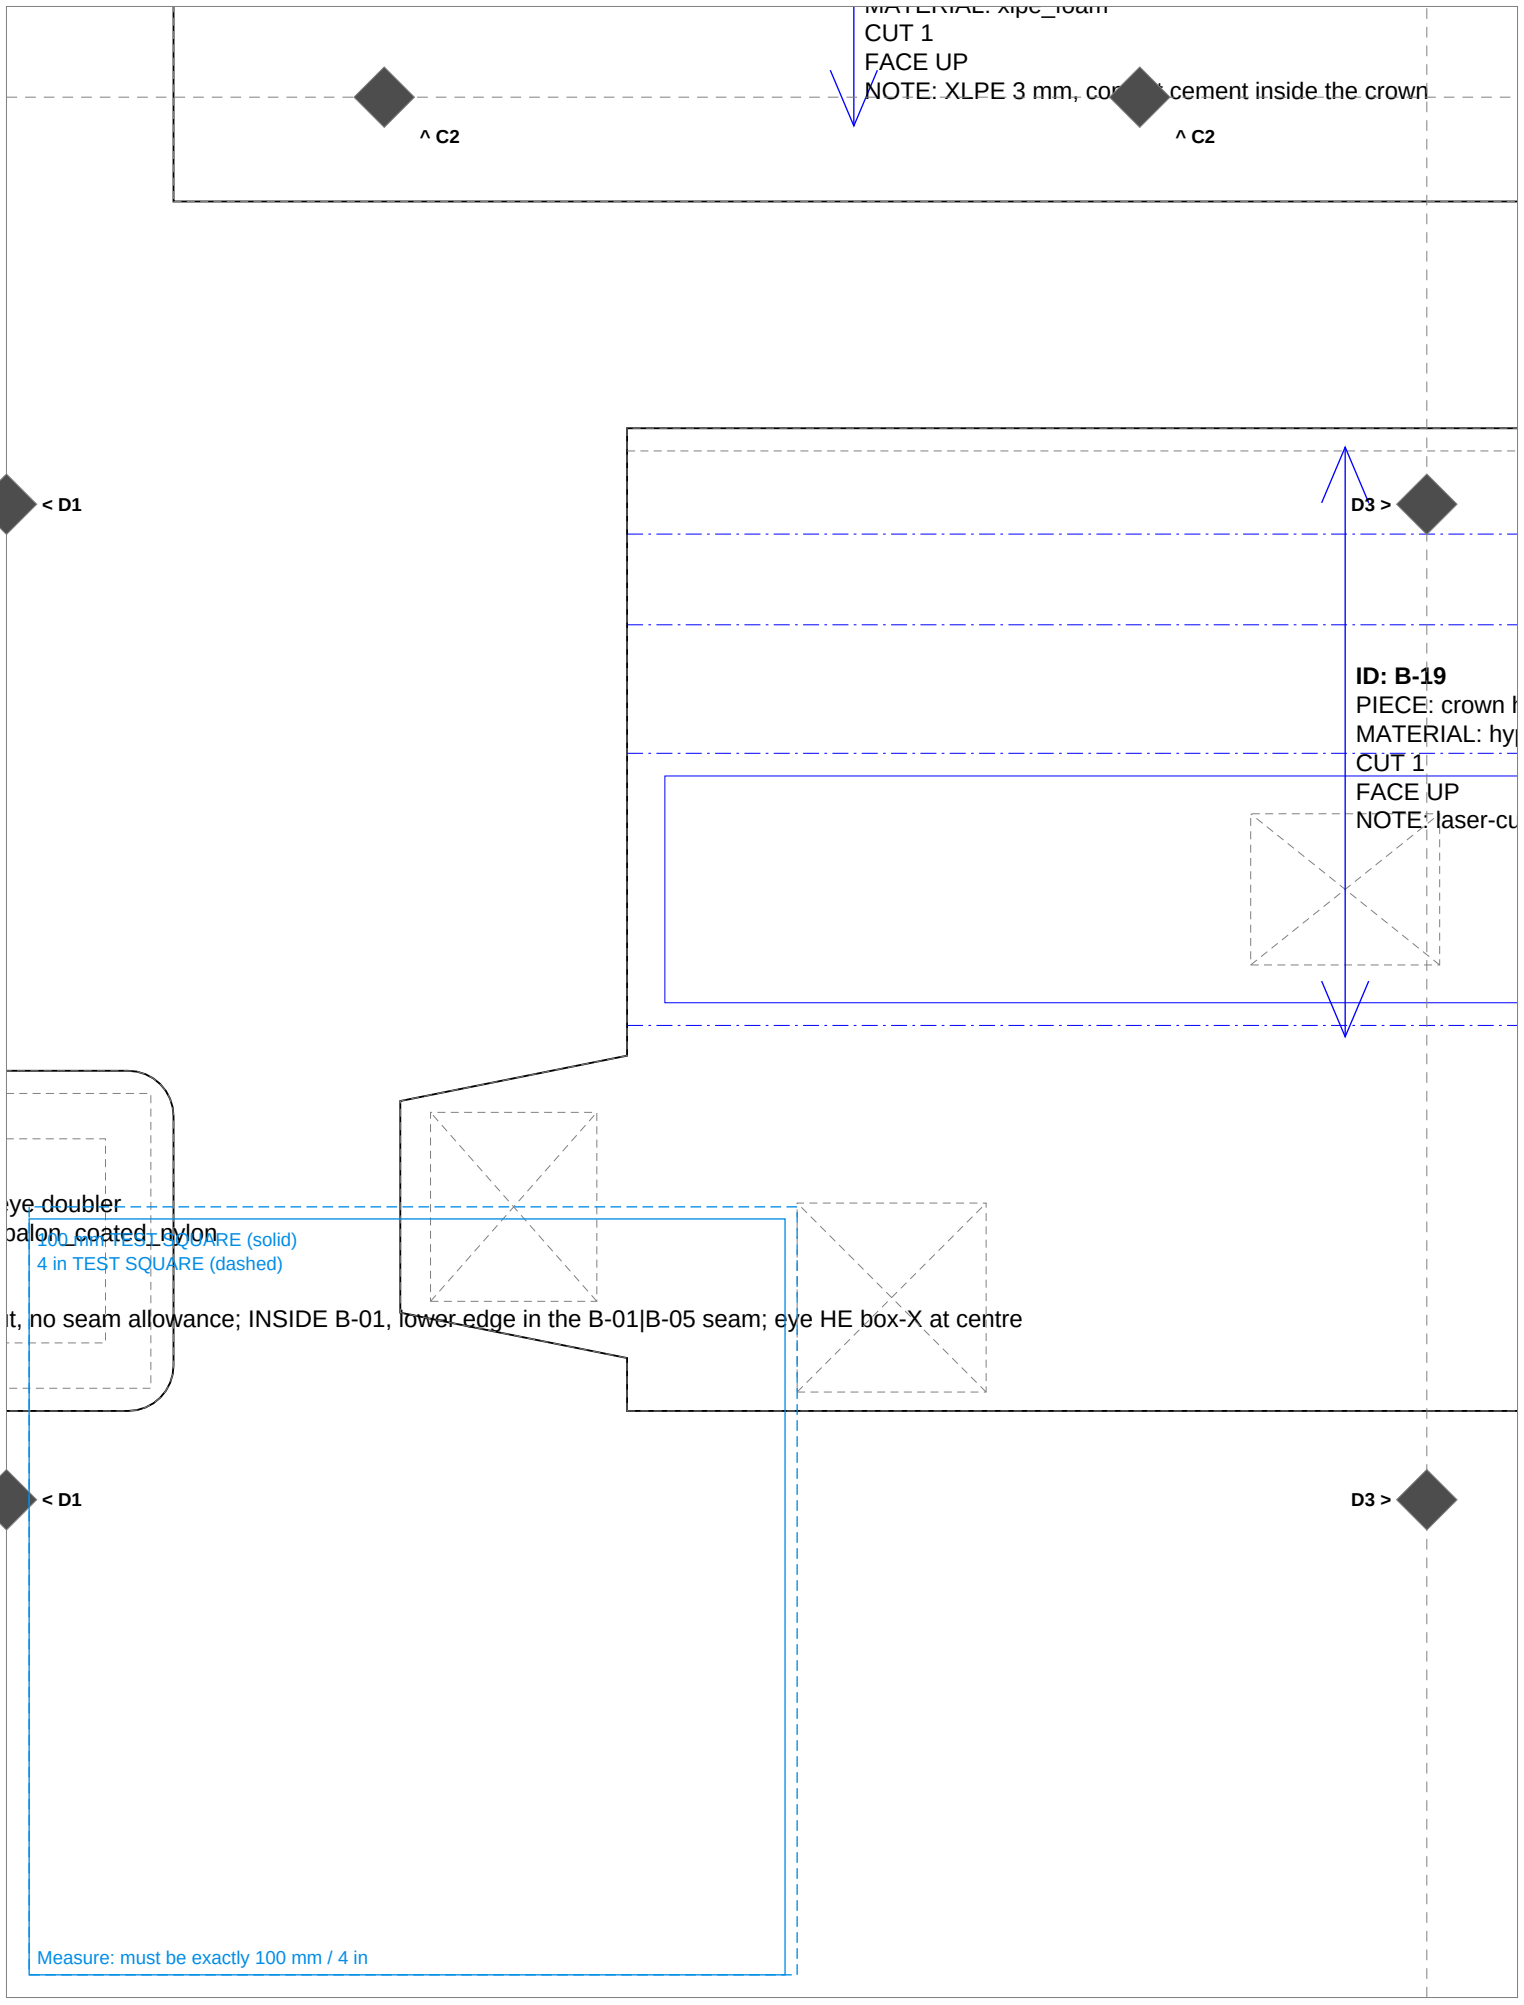
CUT 1
FACE UP
NOTE: XLPE 3 mm, co cement inside the crown
^ C2
^ C2
< D1
D3 >
ID: B-19
PIECE: crown
MATERIAL: hy
CUT 1
FACE UP
NOTE: laser-cu
ye doubler
balon, coated, nylon
100 MM TEST SQUARE (solid)
4 in TEST SQUARE (dashed)
t, no seam allowance; INSIDE B-01, lower edge in the B-01|B-05 seam; eye HE box-X at centre
< D1
D3 >
Measure: must be exactly 100 mm / 4 in

< D2

L9
: crown hood shell
RIAL: hypalon_coated_nylon

UP
laser-cut, no seam allowance; fold 1 back|crown, fold 2 crown|lip on a 19 mm dowel; lip hem 14 mm over B-19s; B-19L glued inside the crown

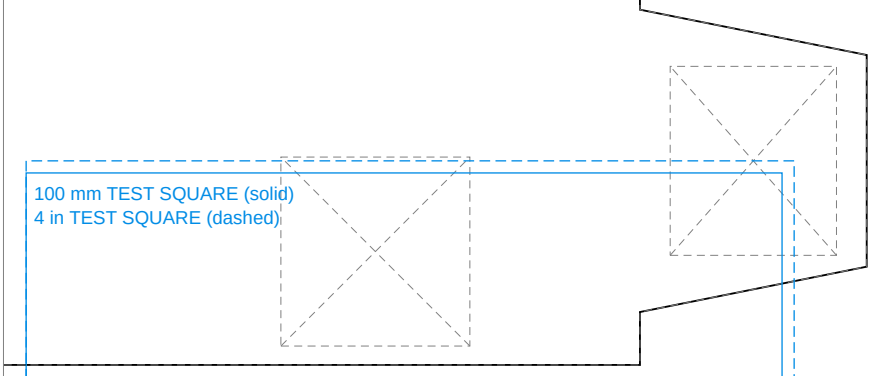

100 mm TEST SQUARE (solid)
4 in TEST SQUARE (dashed)

< D2

Measure: must be exactly 100 mm / 4 in