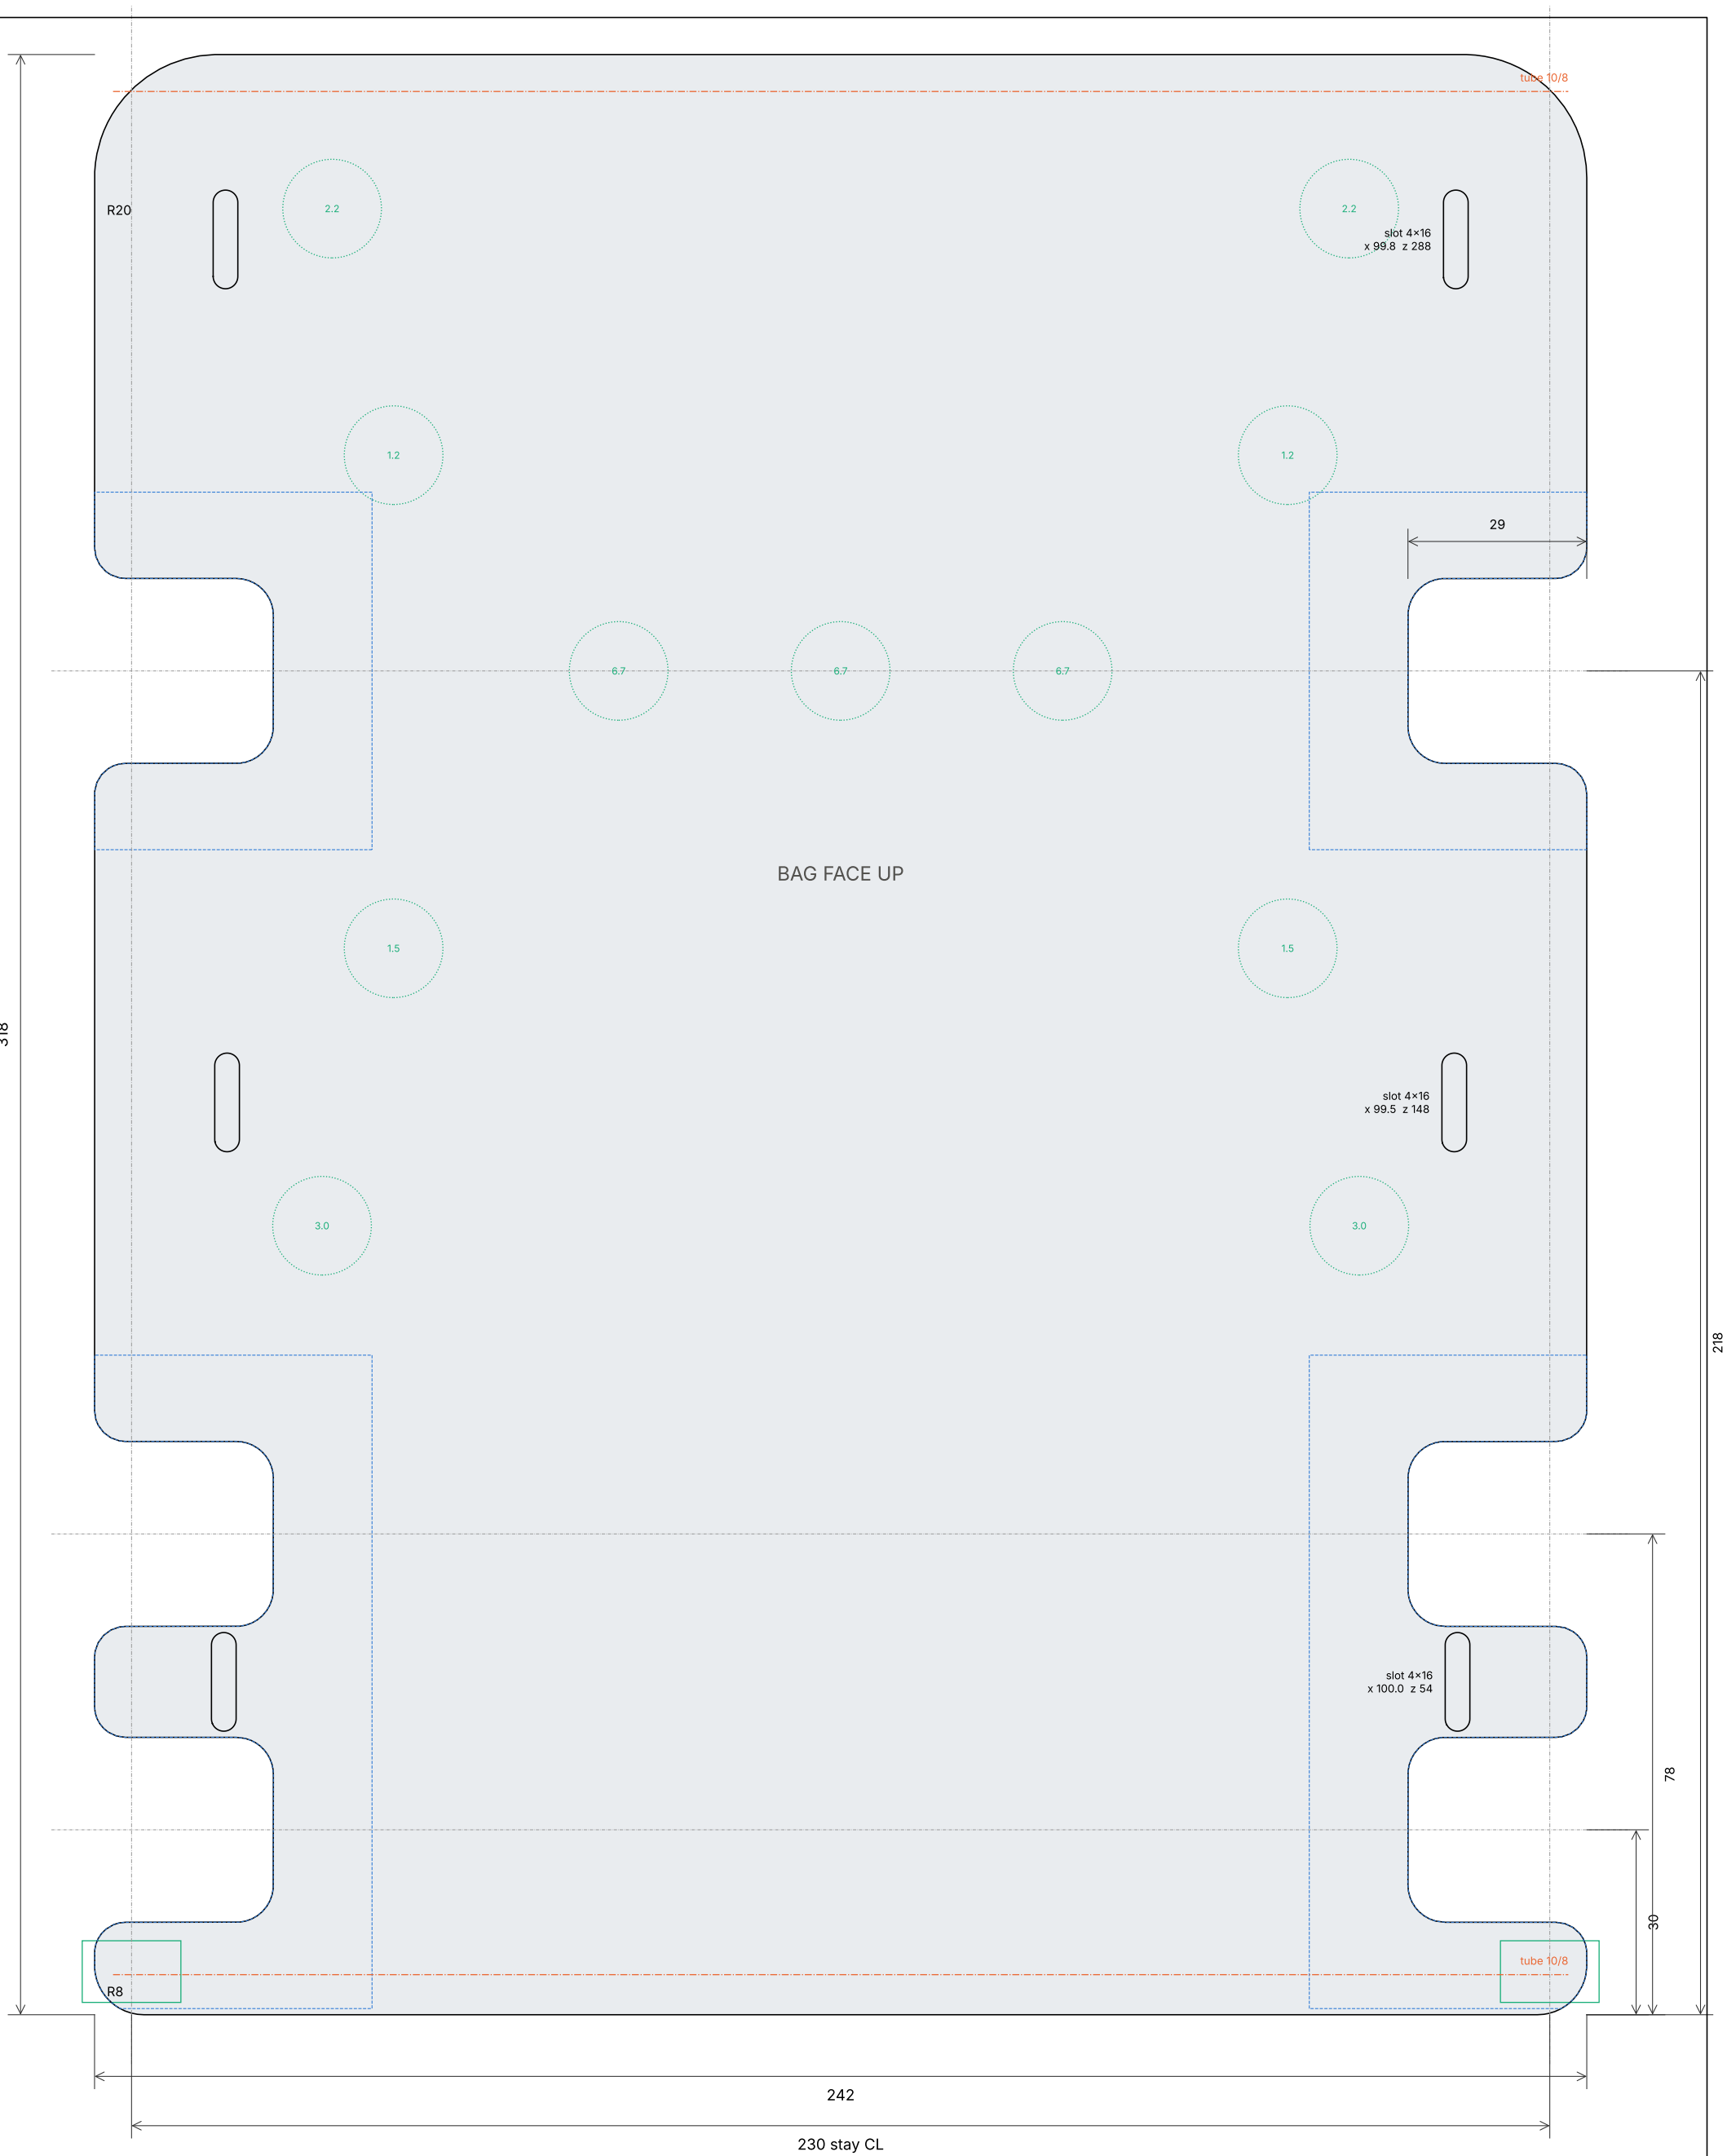

BP-06 rev C SPREADER Hunting-Appeal Pack 5200

20261106 huntkit.gendesign.spreader_report

100 mm check bar

BP-06 rev C SPREADER (sw110c7d) scale 1:1 on A3 units mm (in = mm / 25.4)

Sandwich: twill / 7 mm ROHACELL 110, notch doublers. t = 7.44 mm. Laminate: [0(cfrp_t300_3k_woven_epoxy_ply) / 0(rohacell_110_igf) / 0(cfrp_t300_3k_woven_epoxy_ply)] (inner -> outer)

Mass: sheet 107 g + tubes 21 g + clips/pucks/doublers/seal 35 g = 162 g (5.7 oz)

Origin: frame axis x 0, frame z 0 (bottom edge at z 112). Dims from the bottom edge unless shown.

Tolerances: outline +/-0.3, slots +/-0.2. Inside corners R >= 6. Break all cut edges 0.3.

Notches (cleats US2 z 142, IM1 z 190, IM2 z 330): 30 tall x 29 deep, root at x +/-92, R6 root corners, 6 mm air round each cleat.

Edge seal: two brushed coats of laminating epoxy on every cut PMI edge (blood / grime).

Doublers (blue dash): one 200 g twill ply at 45 deg on each skin, core side, before closing the bag.

Tubes (orange): pultruded 10 x 8 mm, bonded to the bag face with toughened epoxy, 236 mm long.

Pucks (green, dotted): PAHT-CF, bonded to the wearer face; number = height mm. Pads at z 119 (green).

1 mm EVA rub strip, 8 mm wide, on the wearer face over each stay crown line (x +/-115).

Clips: 6 x MJF PA12, snap over the stay; slot carries the inboard post. Toolless, removable.

Ventilation: solid sheet by design (bag-side barrier). Air path is the 130 mm gutter between the rails.