




Adafruit AMG8833 8x8 Thermal Camera Sensor

Created by Justin Cooper

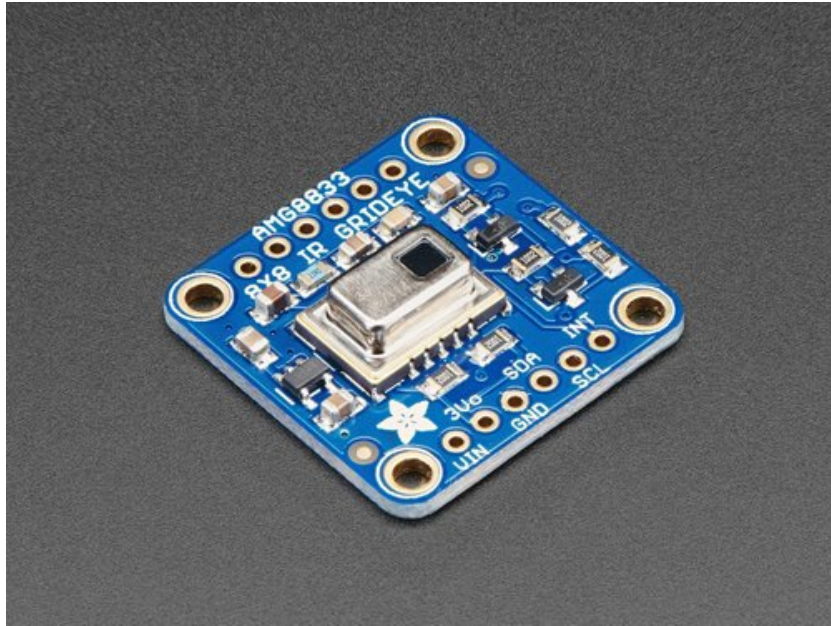


Last updated on 2017-06-28 08:38:07 PM UTC


Guide Contents

Guide Contents	2
Overview	3
Pinouts	8
Power Pins:	8
Logic pins:	9
Assembly	10
Prepare the header strips:	10
Add the breakout board:	11
And Solder!	12
Wiring & Test	14
I2C Wiring	14
Download Adafruit_AMG88xx library	15
Load Thermistor Test	16
Pixel Array Output	17
Library Reference	18
Arduino Thermal Camera	19
Adafruit 1.44" Color TFT LCD Display with MicroSD Card breakout	19
Raspberry Pi Thermal Camera	22
Raspberry Pi 3 - Model B - ARMv8 with 1G RAM	23
PiTFT Plus Assembled 320x240 2.8" TFT + Resistive Touchscreen	23
Assembled Pi T-Cobbler Plus - GPIO Breakout	24
Setup PiTFT	24
Install Python Software	24
Enable I2C	25
Wiring Up Sensor	26
Run example code	28
Downloads	30
Documents	30
Schematic	30
Dimensions	31


Overview

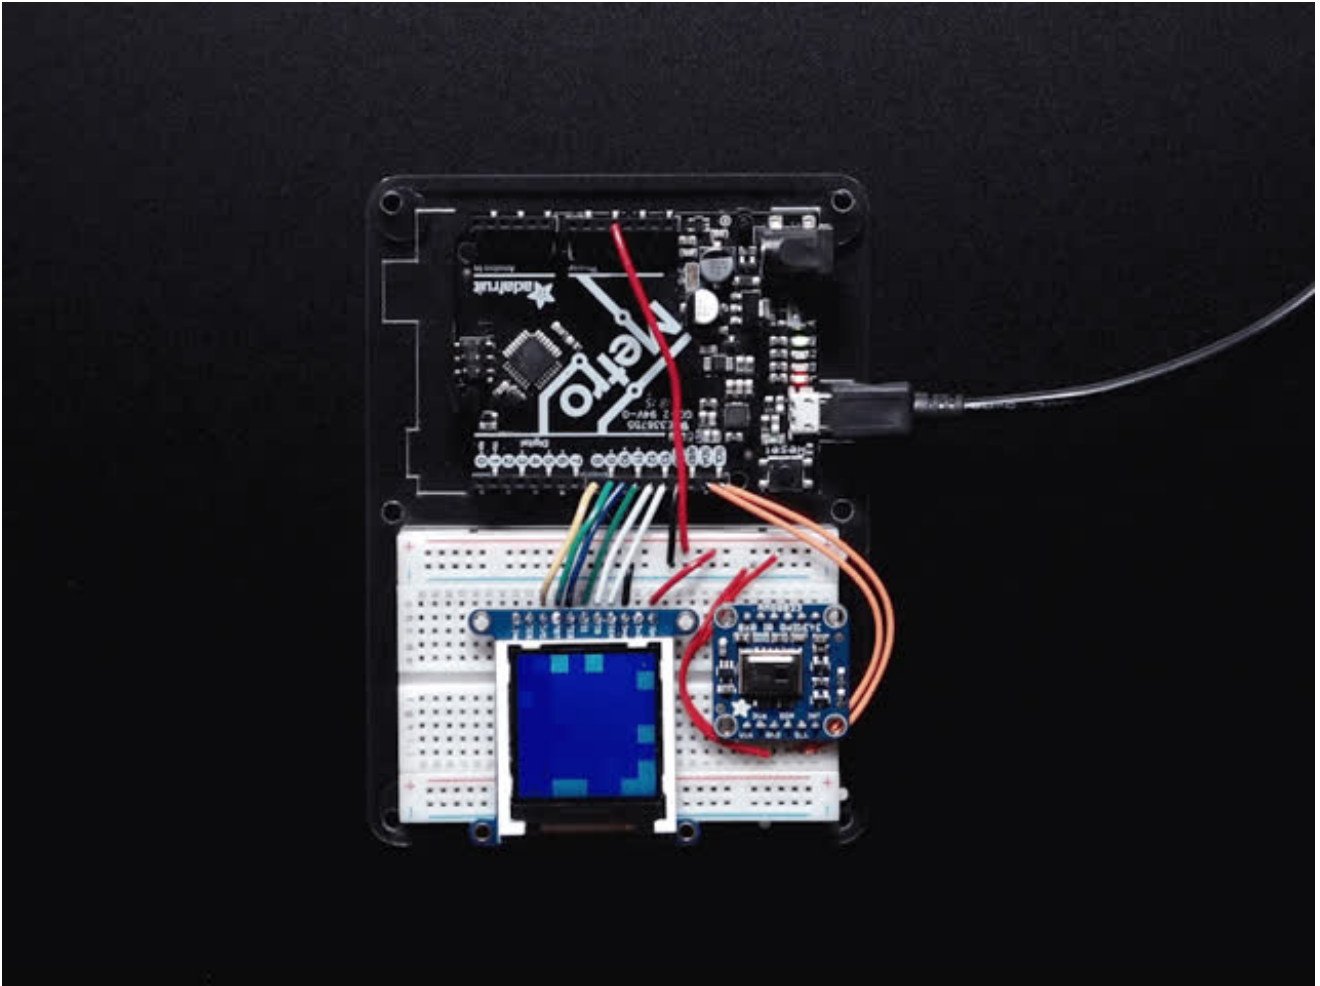


Add heat-vision to your project and with an Adafruit AMG8833 Grid-EYE Breakout! This sensor from Panasonic is an 8x8 array of IR thermal sensors. When connected to your microcontroller (or raspberry Pi) it will return an array of 64 individual infrared temperature readings over I2C. It's like those fancy thermal cameras, but compact and simple enough for easy integration.

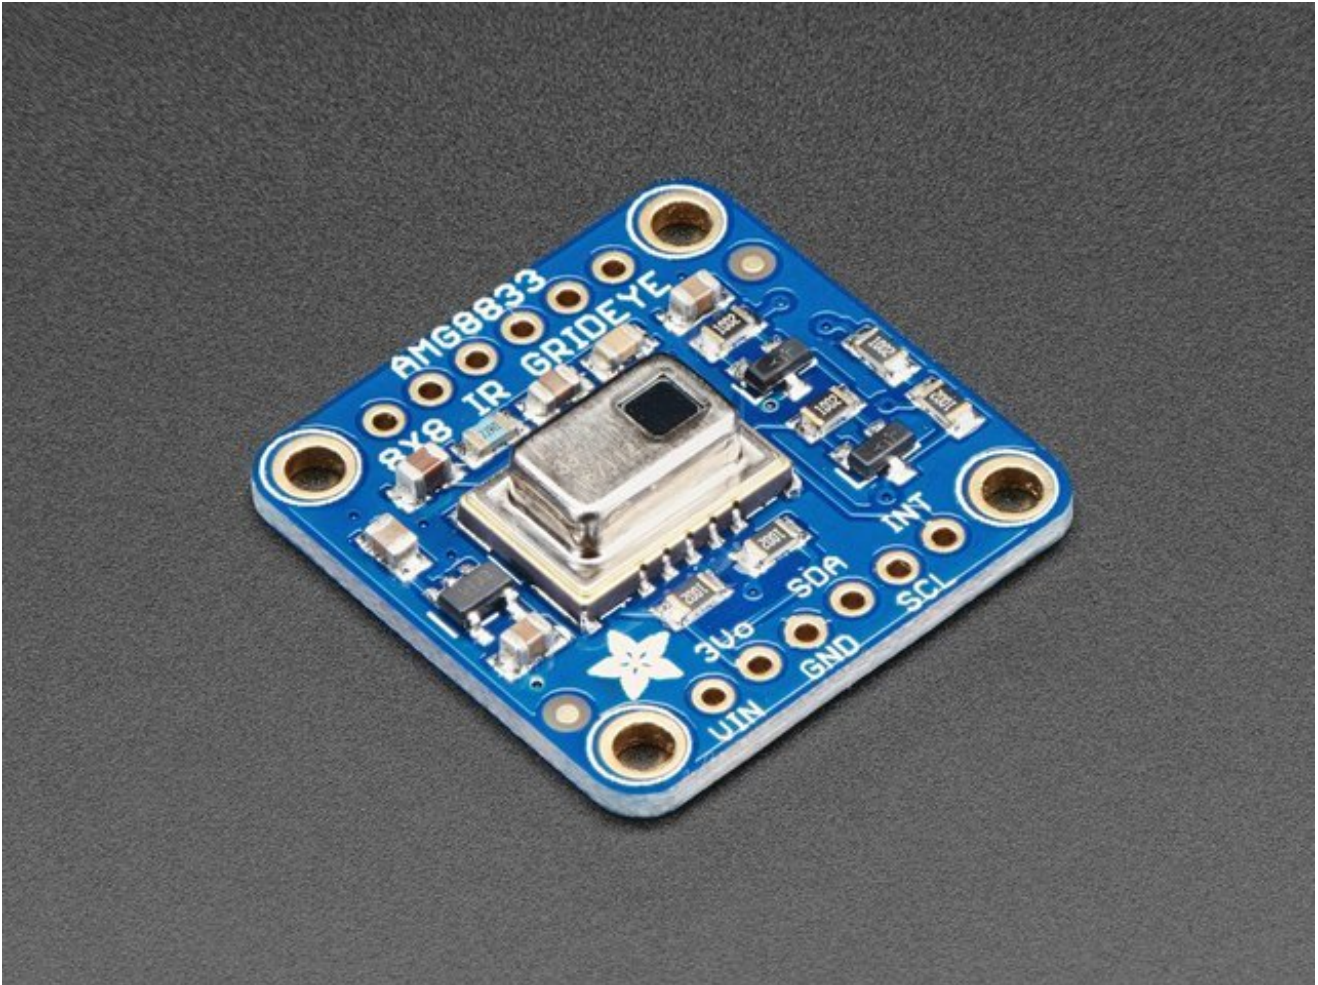


This part will measure temperatures ranging from **0°C to 80°C (32°F to 176°F)** with an accuracy of $\pm 2.5^{\circ}\text{C}$ (4.5°F). It can detect a human from a distance of up to 7 meters (23) feet. With a maximum frame rate of 10Hz, It's perfect for creating your own human detector or mini thermal camera. We have code for using this breakout on an Arduino or compatible (the sensor communicates over I2C) or on a Raspberry Pi with Python. On the Pi, with a bit of image processing help from the SciPy python library we were able to interpolate the 8x8 grid and get some pretty nice results!

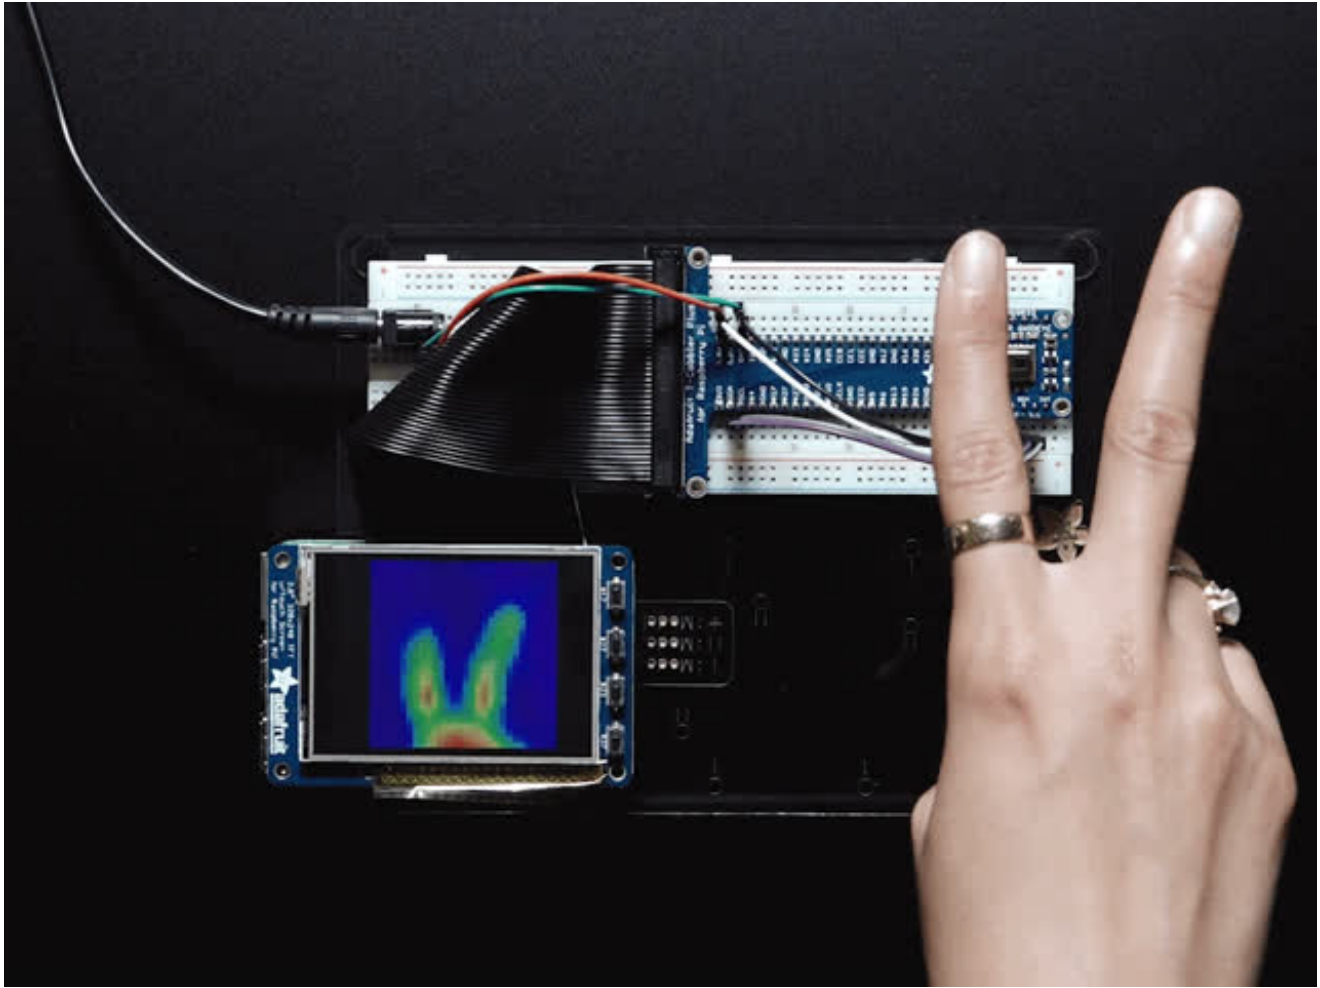

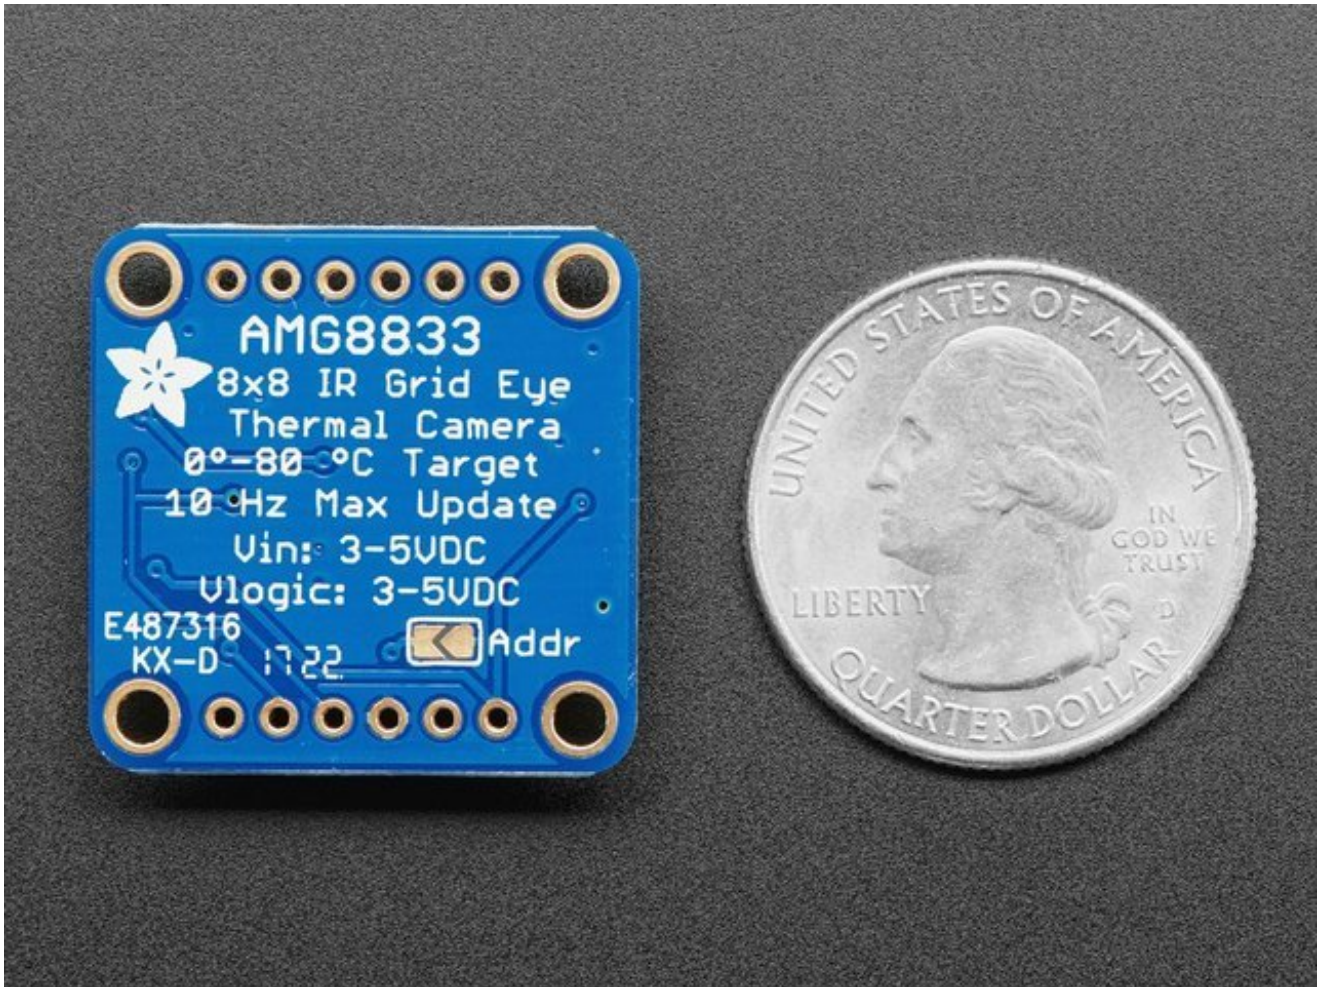


The AMG8833 is the next generation of 8x8 thermal IR sensors from Panasonic, and offers higher performance than its predecessor the AMG8831. The sensor only supports I2C, and has a configurable interrupt pin that can fire when any individual pixel goes above or below a thresholds that you set.

To make it easy to use, we pick & placed it on a breakout board with a 3.3V regulator and level shifting. So you can use it with any 3V or 5V microcontroller or computer.

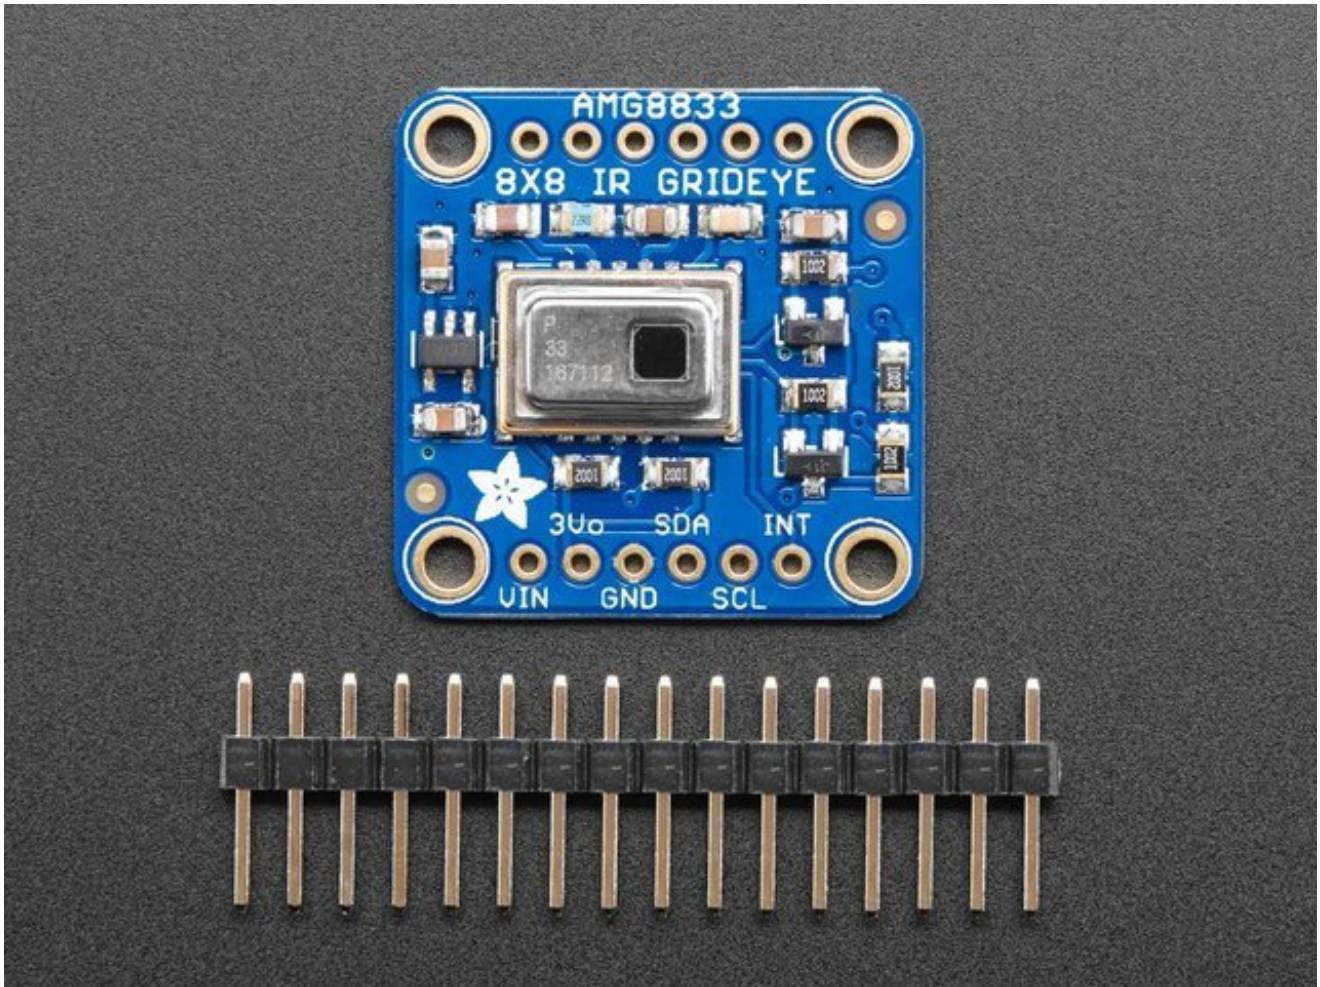

Even better - We've done all the hard work here, with example code and supporting software libraries to get you up in running in just a few lines of code!

Pinouts

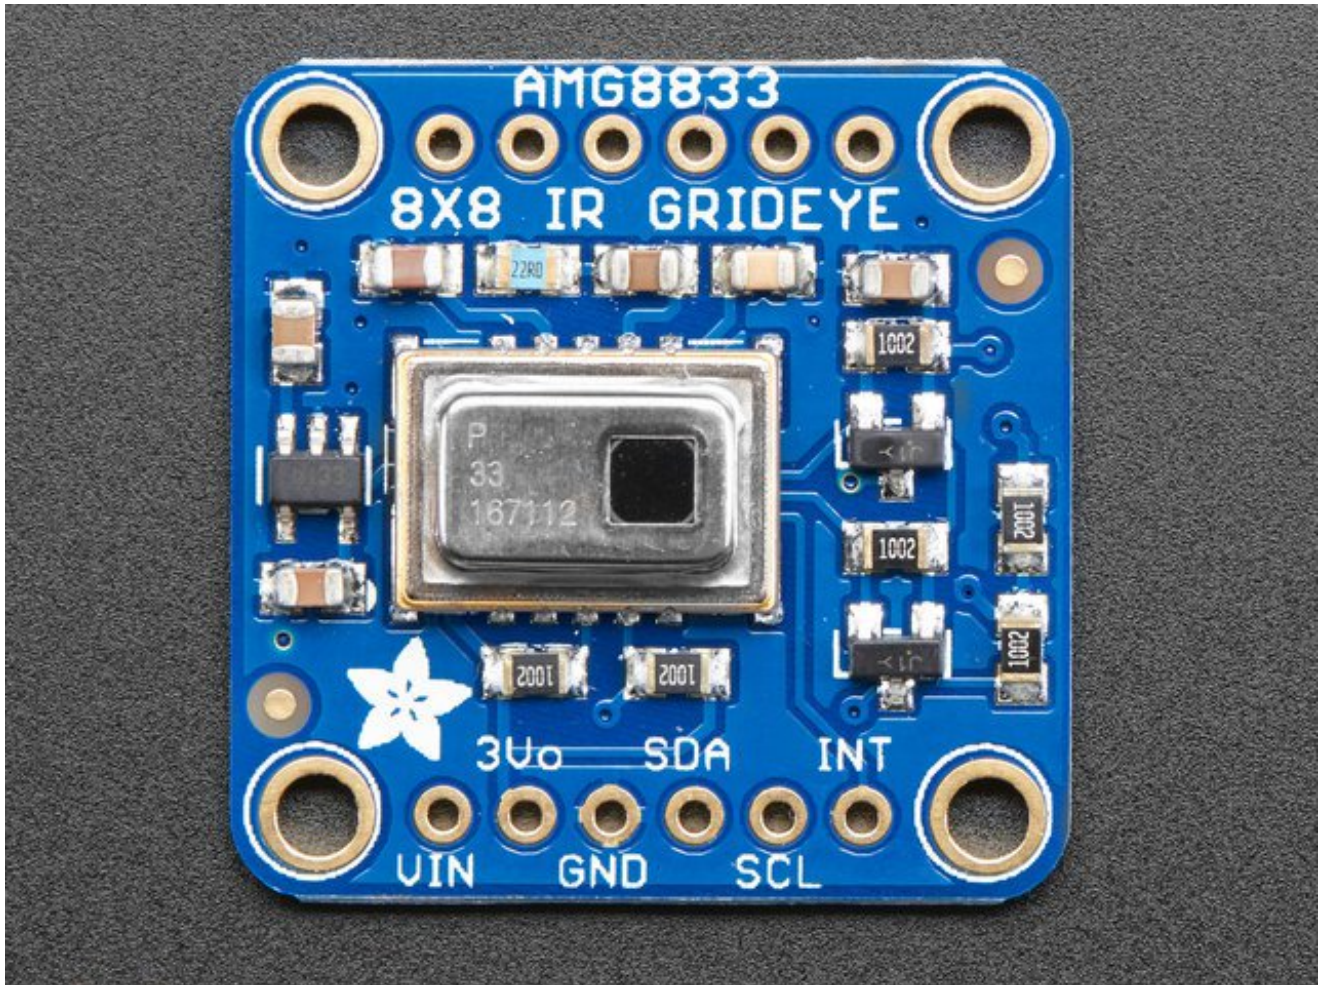


This camera has 4 mounting holes, and two header strips. Only the bottom strip is connected to the sensor. The top set of breakouts is there for mechanical stability only!

Power Pins:

- **Vin** - this is the power pin. Since the sensor uses 3.3V, we have included an onboard voltage regulator that will take 3-5VDC and safely convert it down. To power the board, give it the same power as the logic level of your microcontroller - e.g. for a 5V micro like Arduino, use 5V
- **3Vo** - this is the 3.3V output from the voltage regulator, you can grab up to 100mA from this if you like
- **GND** - common ground for power and logic



Logic pins:

- **SCL** - this is the I2C clock pin, connect to your microcontrollers I2C clock line. There is a 10K pullup on this pin and it is level shifted so you can use 3 - 5VDC.
- **SDA** - this is the I2C data pin, connect to your microcontrollers I2C data line. There is a 10K pullup on this pin and it is level shifted so you can use 3 - 5VDC.
- **INT** - this is the interrupt-output pin. It is 3V logic and you can use it to detect when something moves or changes in the sensor vision path.

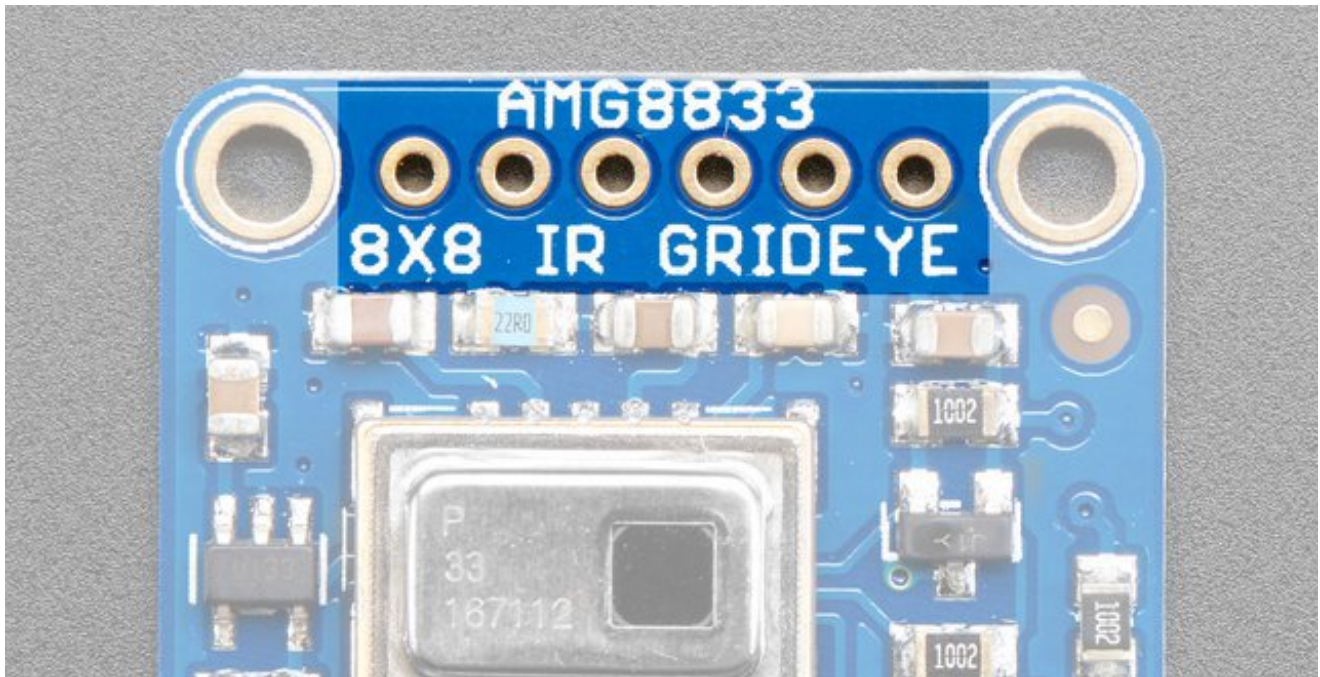


The 6 holes at the top of the board are provided for stability and are not connected to anything. Use these if you want your sensor to sit nice and flat on a breadboard or Perma-Proto.

Assembly

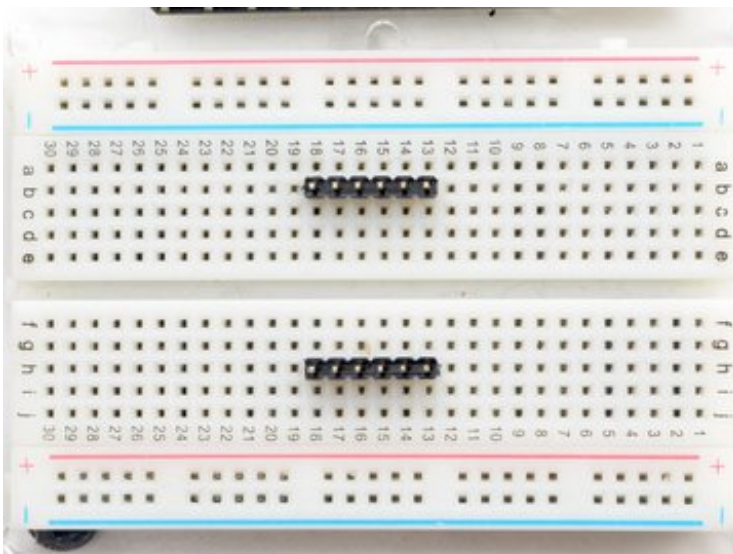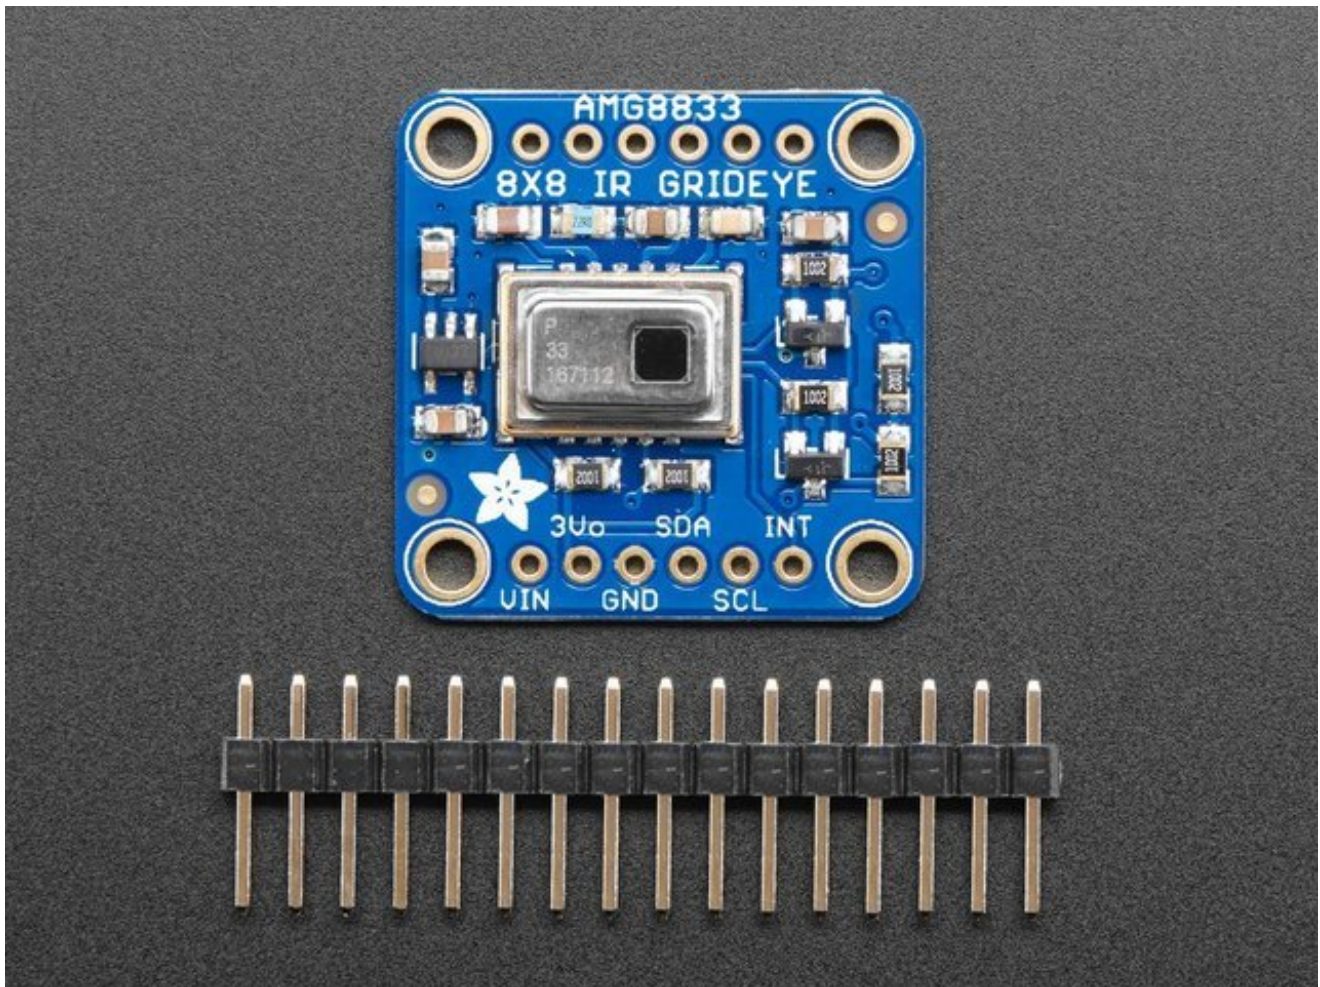


Prepare the header strips:

Cut the strips to length if necessary. It will be easier to solder if you insert it into a breadboard - **long pins down**

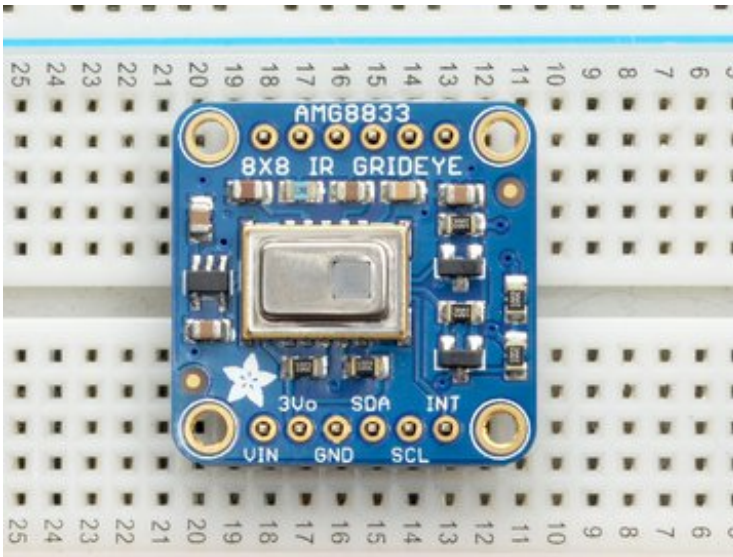

Add the breakout board:



Place the breakout board over the pins so that the short pins poke through the breakout pads

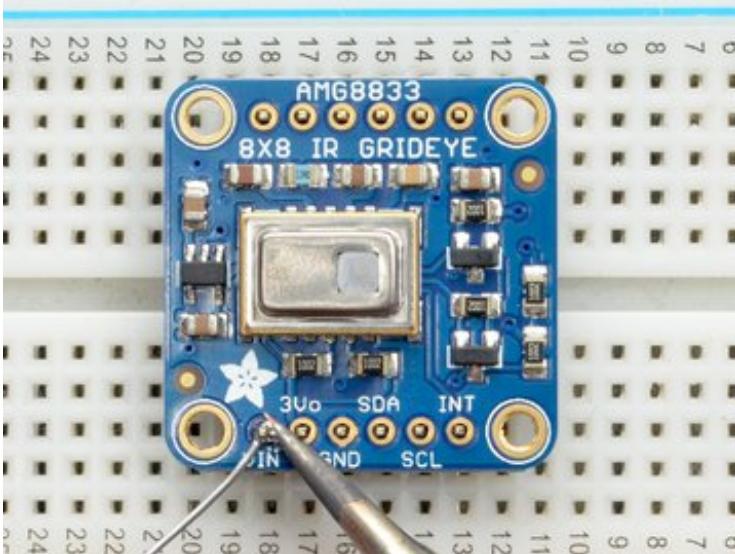

And Solder!

Be sure to solder all pins for reliable electrical contact.

(For tips on soldering, be sure to check out our [Guide to Excellent Soldering](http://adafruit.it/aTk) (<http://adafruit.it/aTk>)).

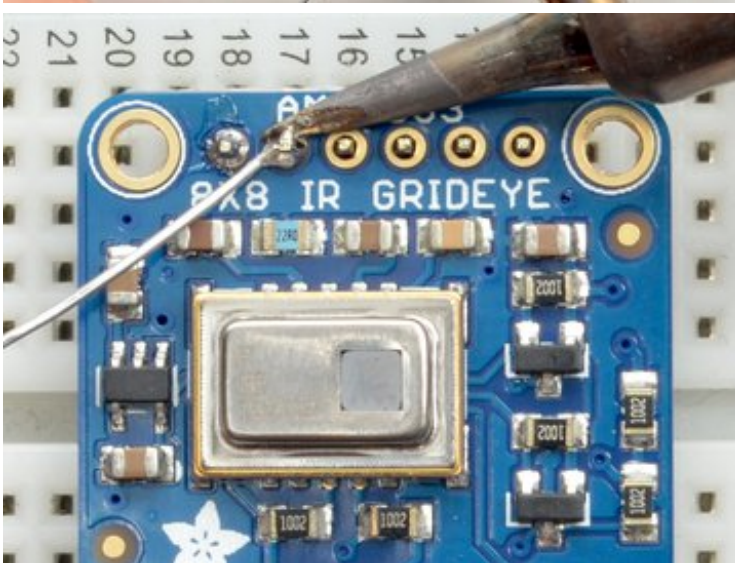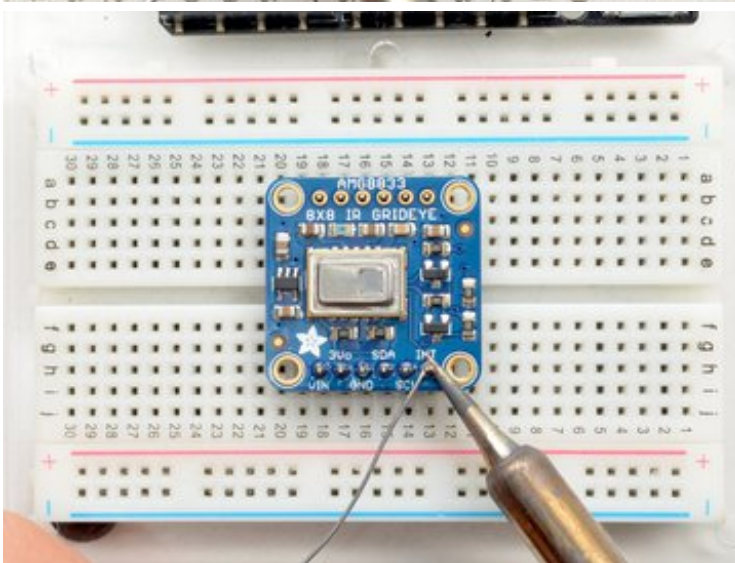



You're done! Check your solder joints visually and continue onto the next steps


Wiring & Test

You can easily wire this breakout to any microcontroller, we'll be using an Arduino. You can use any other kind of microcontroller as well as long as it has I2C clock and I2C data lines.

I2C Wiring

- Connect **Vin** to the power supply, 3-5V is fine. Use the same voltage that the microcontroller logic is based off of. For most Arduinos, that is 5V
- Connect **GND** to common power/data ground
- Connect the **SCL** pin to the I2C clock **SCL** pin on your Arduino.
On an UNO & '328 based Arduino, this is also known as **A5**, on a Mega it is also known as **digital 21** and on a Leonardo/Micro, **digital 3**
- Connect the **SDA** pin to the I2C data **SDA** pin on your Arduino.
On an UNO & '328 based Arduino, this is also known as **A4**, on a Mega it is also known as **digital 20** and on a Leonardo/Micro, **digital 2**

By default, the I2C address is 0x69. If you solder the jumper on the back of the board labeled "**Addr**", the address will change to 0x68.

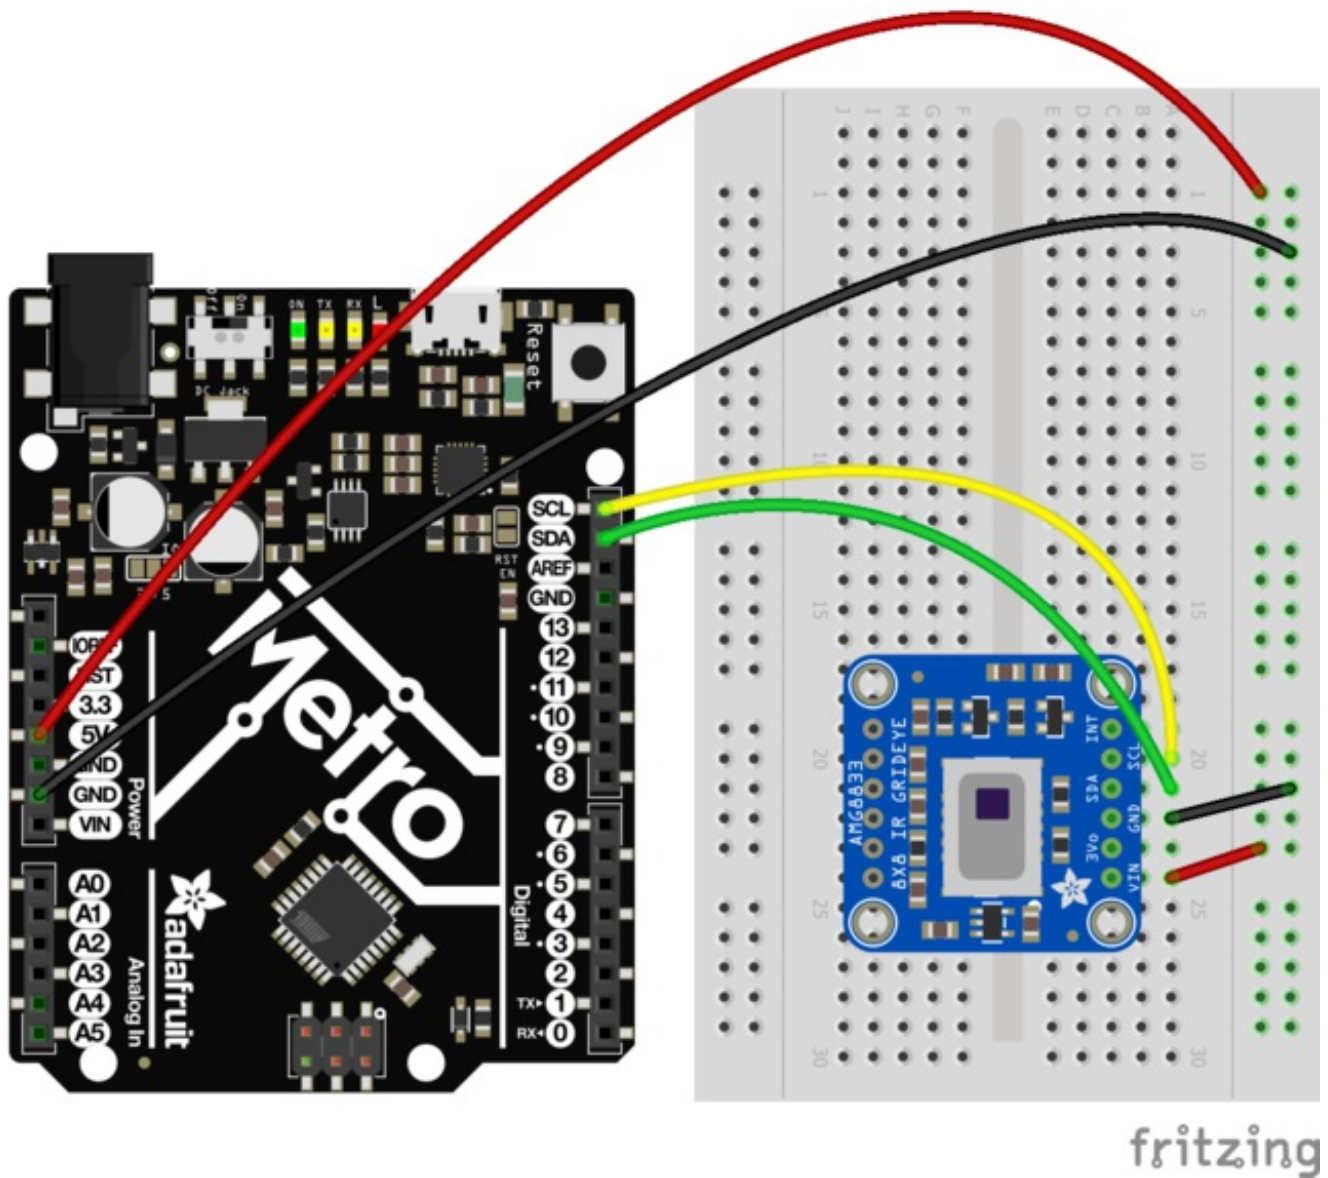

Download Adafruit_AMG88xx library

To begin reading sensor data, you will need to download Adafruit_AMG88xx from our github repository. You can do that by visiting the github repo and manually downloading or, easier, just click this button to download the zip

[Download Adafruit AMG88xx Library](https://github.com/adafruit/Adafruit_AMG88xx)

<http://adafru.it/xfw>

Rename the uncompressed folder **Adafruit_AMG88xx** and check that the

Adafruit_AMG88xx folder contains **Adafruit_AMG88xx.cpp** and **Adafruit_AMG88xx.h**


Place the **Adafruit_AMG88xx** library folder your **arduinofolder/libraries/** folder. You may need to create the **libraries** subfolder if its your first library. Restart the IDE.

We also have a great tutorial on Arduino library installation at:


<http://learn.adafruit.com/adafruit-all-about-arduino-libraries-install-use> (<http://adafru.it/aYM>)

Load Thermistor Test

Open up **File->Examples->Adafruit_AMG88xx->amg88xx_test** and upload to your Arduino wired up to the sensor. This example just connects to the sensor and reads the internal thermistor to test your connections.

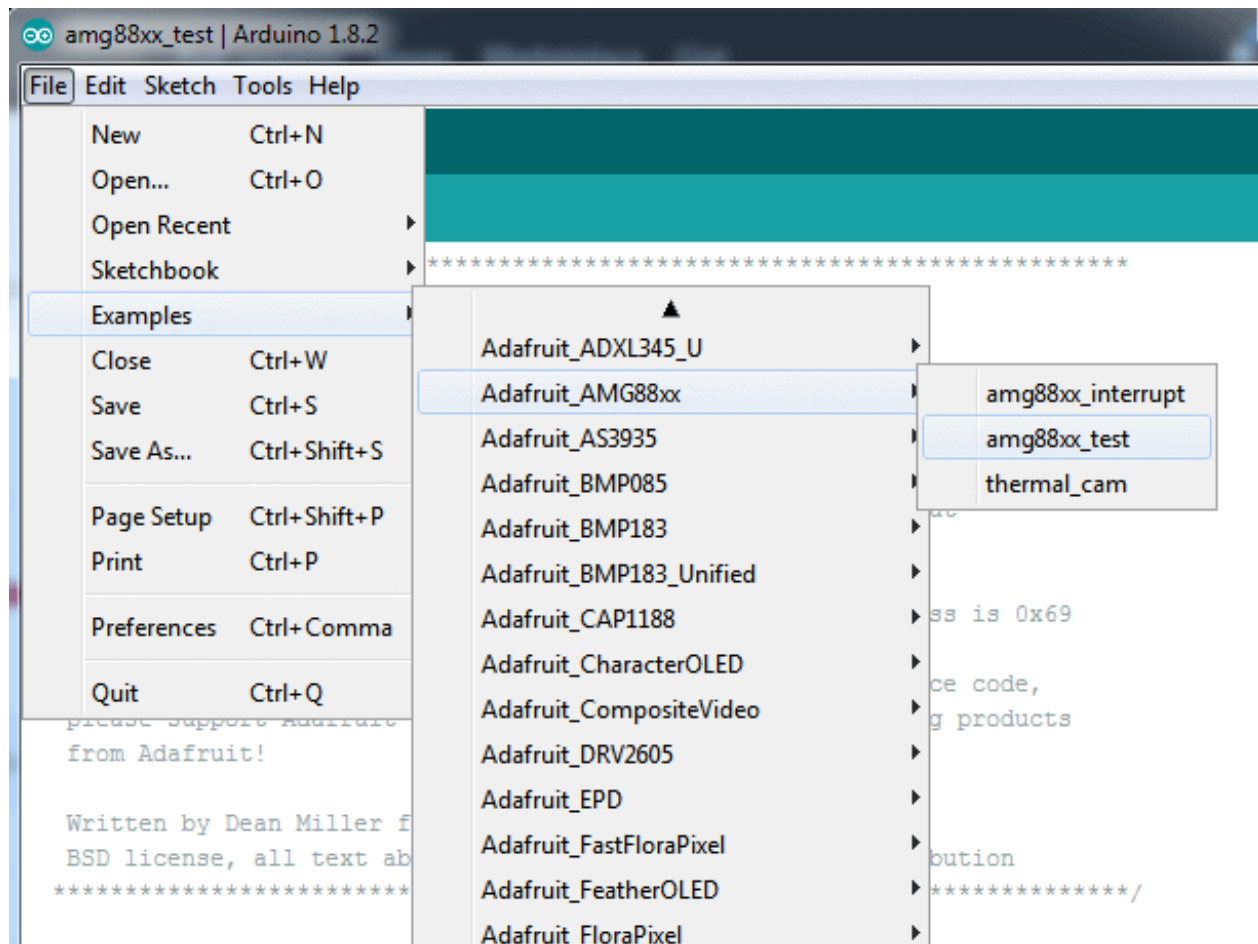

Once uploaded to your Arduino, open up the serial console at 9600 baud speed to see the internal thermistor reading. If you get a reading of ~26° degrees (room temperature) then everything is wired and working correctly!

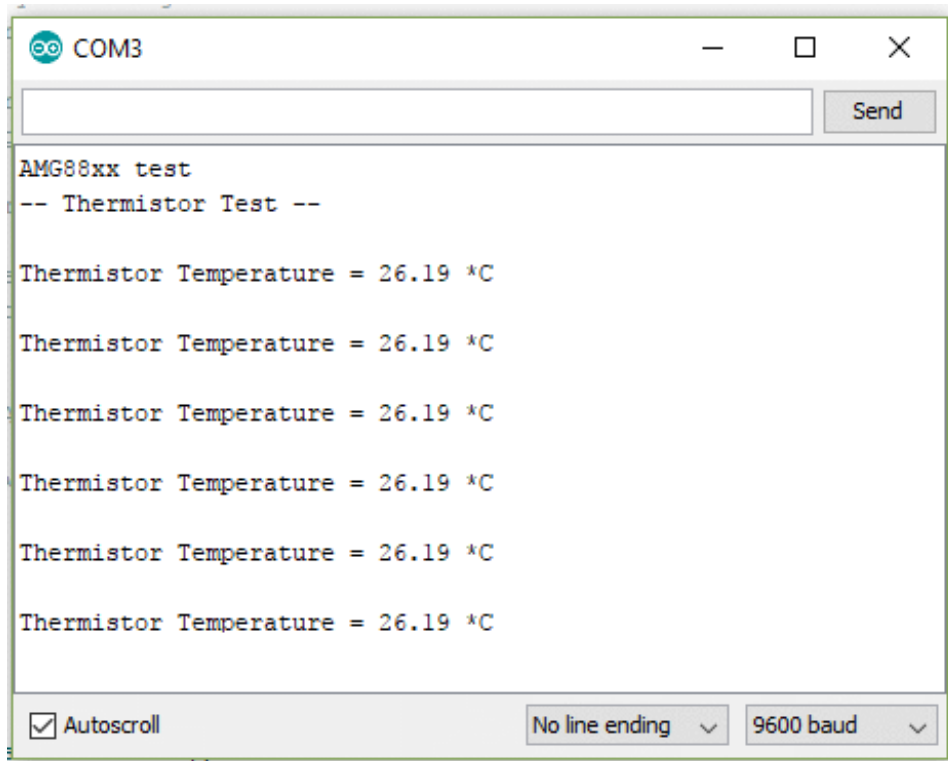


Pixel Array Output

OK now that we know the sensor is working, let's read actual thermal data. Load up **File -> Examples -> Adafruit_AMG88 -> pixels_test**

Upload the code, and open the serial console at 9600 baud rate. You should see a printout of the array of readings every second. Each number is the detected temperature in Celsius, and in the 8x8 grid order that comes from the sensor

The numbers should increase if you put your hand or face above the sensor. They'll decrease if you hold up something cold in front of the sensor eye

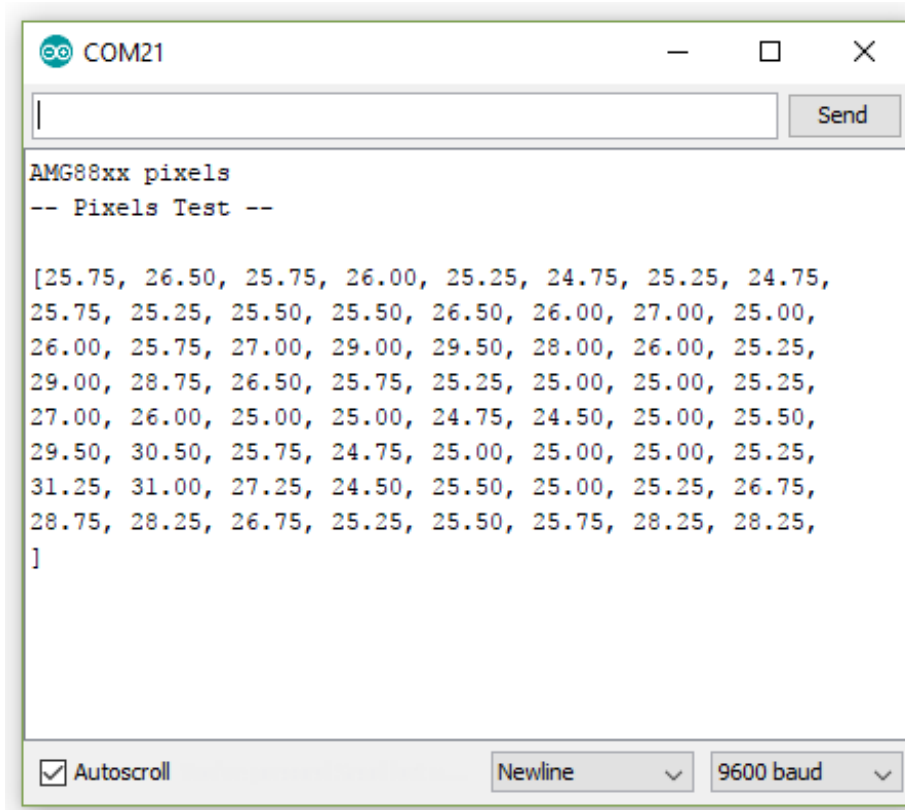

Library Reference

To create the object, use

```
Adafruit_AMG88xx amg;
```

Initialize the sensor using

```
status = amg.begin();  
if (!status) {  
  Serial.println("Could not find a valid AMG88xx sensor, check wiring!");  
  while (1);  
}
```

to read the pixels you will need an array to place the readings into. Once you have one, you can call `readPixels`. Make sure the array you create is big enough by using the pre-defined `AMG88xx_PIXEL_ARRAY_SIZE` macro.

```
float pixels[AMG88xx_PIXEL_ARRAY_SIZE];  
amg.readPixels(pixels);
```

Arduino Thermal Camera

To make your Arduino into a cool thermal camera, we can add a small display.

In this example we use an Adafruit 1.44" Color TFT. With some code changes, you can use other size displays but a color display is best of course.



Adafruit 1.44" Color TFT LCD Display with MicroSD Card breakout

PRODUCT ID: 2088

This lovely little display breakout is the best way to add a small, colorful and bright display to any project. Since the display uses 4-wire SPI to communicate and has its own...

<http://adafru.it/dXI>


\$14.95

IN STOCK


Keep your AMG8833 breakout wired as you already have it from the Wiring & Test section above, and add your TFT like this



Hit upload and you should have a simple thermal camera!

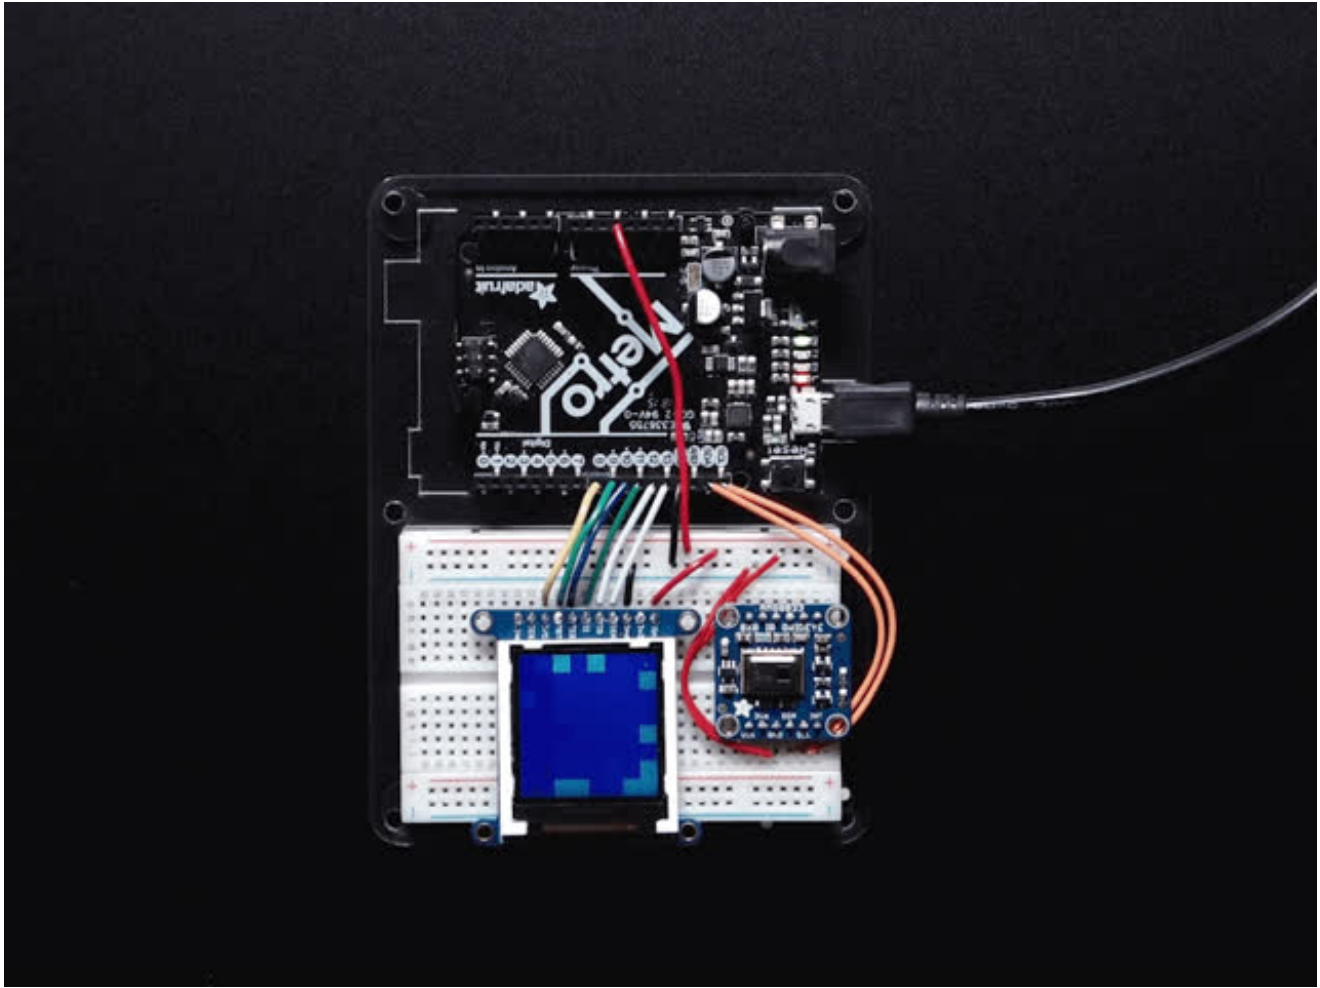

Raspberry Pi Thermal Camera

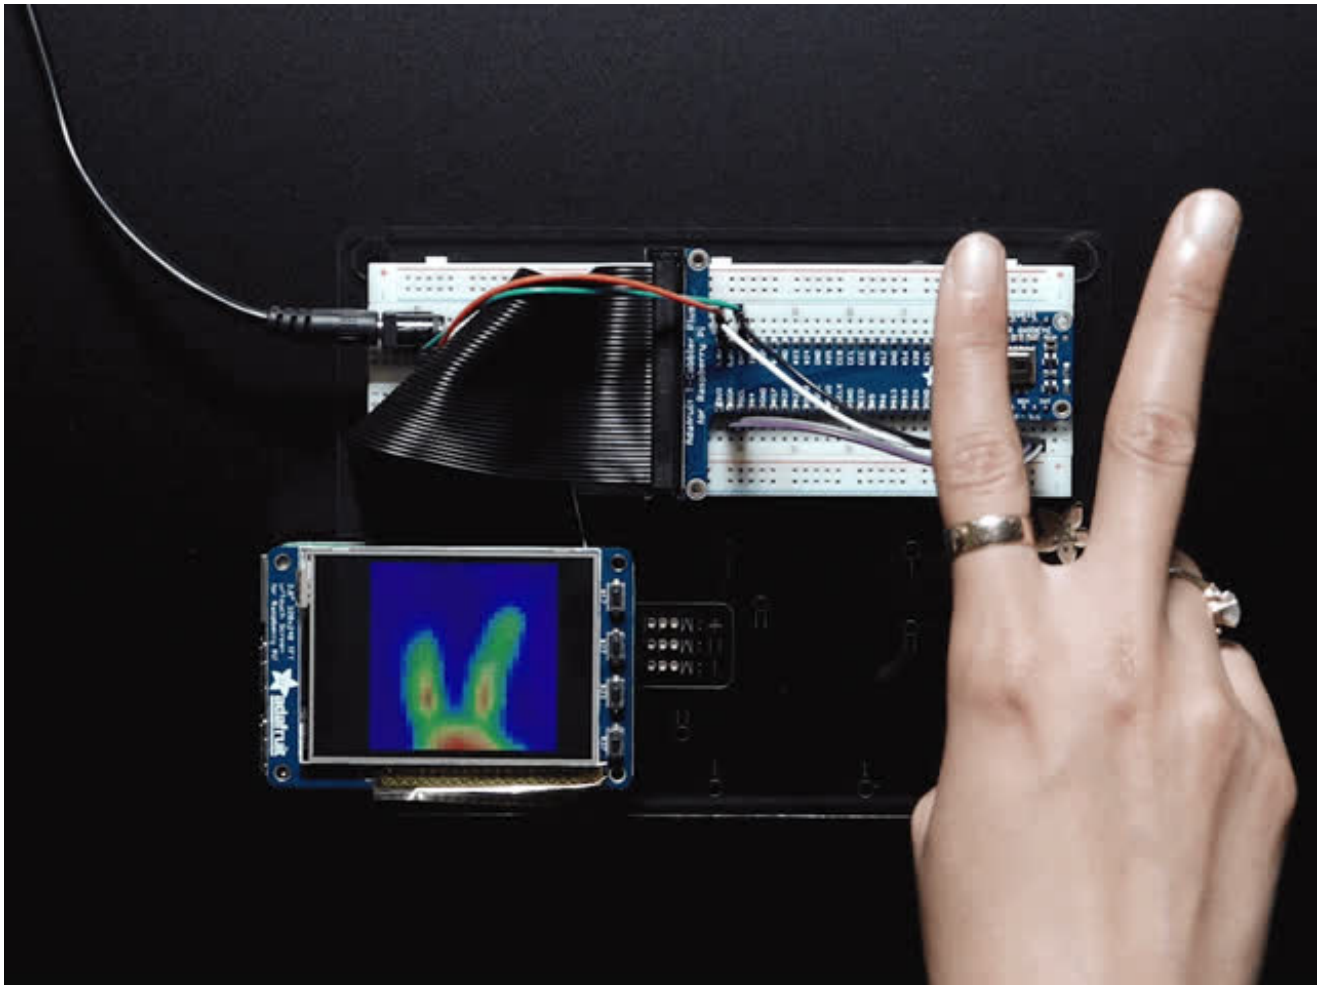

The Raspberry Pi also has an i2c interface, and even better has processing capability to interpolate and filter the sensor output. By adding processing power, you can 'turn' the 8x8 output into what appears to be a higher-resolution display.

We're using a PiTFT 2.8" and a Pi Cobbler but the code can be adapted to output to the HDMI display - we're using pygame to draw to the framebuffer.

You can use any Raspberry Pi computer, from Pi A+ to Pi 3 or even a Pi Zero, but we happen to have a Pi 3 on our desk set up already so we're using that.



Raspberry Pi 3 - Model B - ARMv8 with 1G RAM


PRODUCT ID: 3055

Did you really think the Raspberry Pi would stop getting better? At this point, we sound like a broken record, extolling on the new Pi's myriad improvements like we're...

<http://adafru.it/scY>

\$39.95

IN STOCK

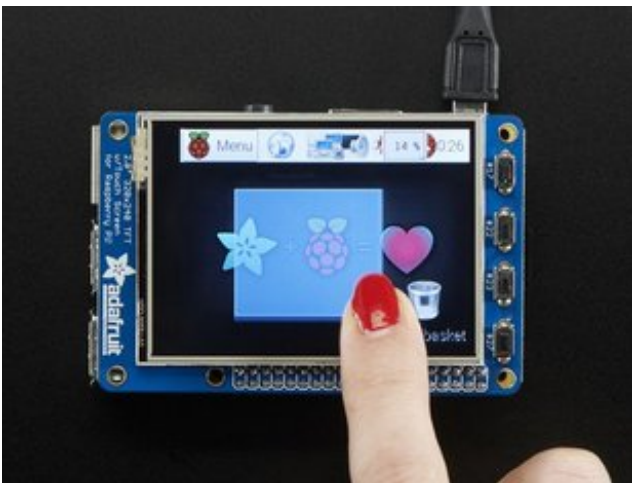

PiTFT Plus Assembled 320x240 2.8" TFT + Resistive Touchscreen

PRODUCT ID: 2298

Is this not the cutest little display for the Raspberry Pi? It features a 2.8" display with 320x240 16-bit color pixels and a resistive touch overlay. The plate uses the high...

<http://adafru.it/eZS>

\$34.95

IN STOCK



Assembled Pi T-Cobbler Plus - GPIO Breakout

PRODUCT ID: 2028

This is the assembled version of the Pi T-Cobbler Plus. It only works with the Raspberry Pi Model Zero, A+, B+, Pi 2, Pi 3! (Any Pi with 2x20 connector) The Raspberry Pi has landed...

<http://adafru.it/xgf>

\$7.95

IN STOCK

Setup PiTFT

If you have not done so already, the first thing you will need to do is setup your PiTFT. Instructions on how to do so can be found in [this guide](http://adafru.it/sha) (<http://adafru.it/sha>).

Install Python Software

Once your PiTFT is all set up, and you have Internet access set up, lets install some software we will need. First make sure your Pi package manager is up to date.

```
sudo apt-get update
```

Next, we will install the Raspberry Pi library and Adafruit_GPIO which is our hardware interfacing layer

```
sudo apt-get install -y build-essential python-pip python-dev python-smbus git
git clone https://github.com/adafruit/Adafruit_Python_GPIO.git
cd Adafruit_Python_GPIO
sudo python setup.py install
```

Finally, install both pygame and scipy. Pygame lets us draw easily to a screen using


python, we'll use that to make the display work. Scipy is a powerful scientific/data processing library that we can use to magically turn the $8 \times 8 = 64$ pixel array into something that looks more like a $32 \times 32 = 1024$ pixel array. Wow, isn't digital signal processing cool?

```
sudo apt-get install -y python-scipy python-pygame
sudo pip install colour Adafruit_AMG88xx
```


Enable I2C

We need to enable the I2C bus so we can communicate with the sensor.

```
sudo raspi-config
```

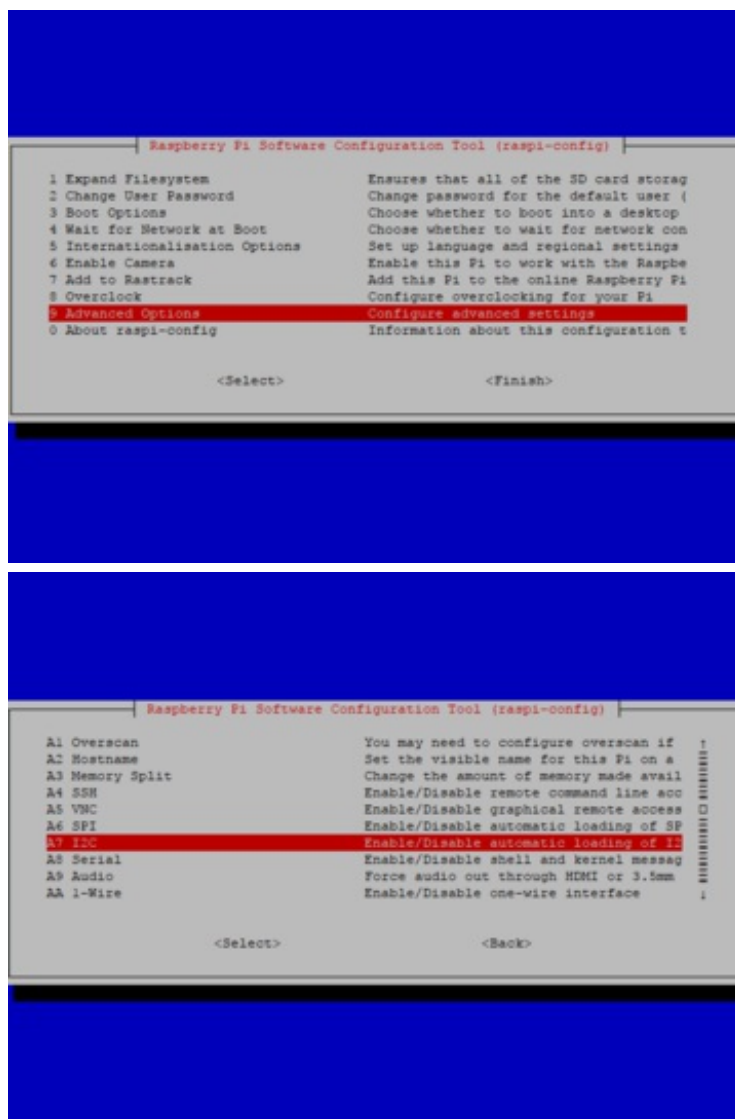

select Advanced options, enable I2C, and then finish.

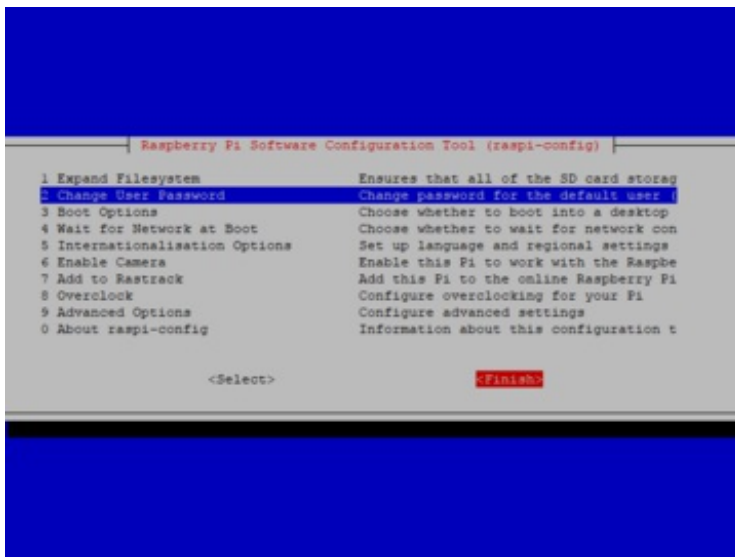



Once I2C is enabled, run **sudo shutdown -h now** to turn off the Pi and prepare for wiring

Wiring Up Sensor

With the Pi powered off, we can wire up the sensor to the Pi Cobbler like this:

- Connect **Vin** to the 3V or 5V power supply (either is fine)
- Connect **GND** to the ground pin on the Cobbler
- Connect **SDA** to **SDA** on the Cobbler
- Connect **SCL** to **SCL** on the Cobbler

You can also use direct wires, we happen to have a Cobbler ready. remember you can plug the cobbler into the bottom of the PiTFT to get access to all the pins!

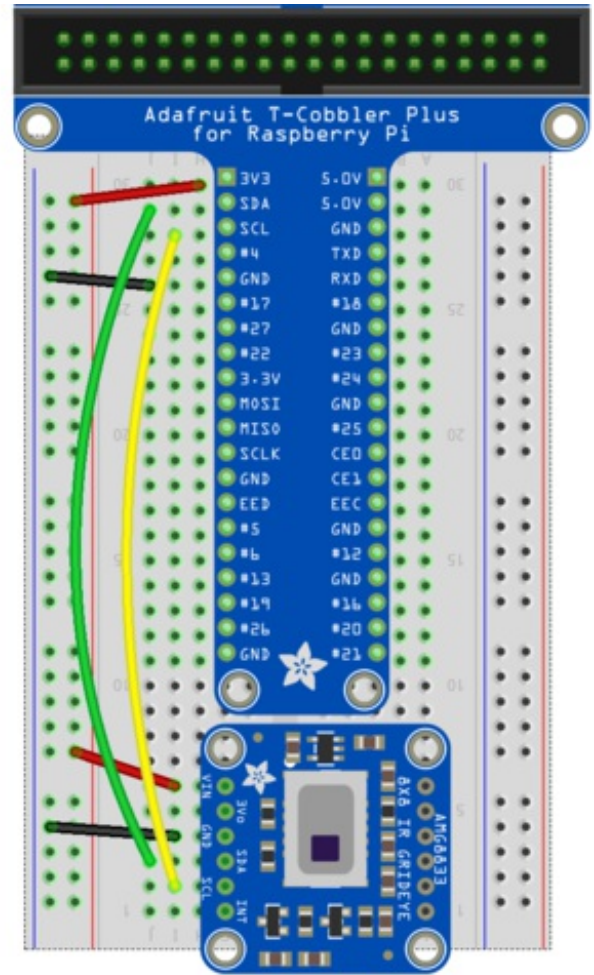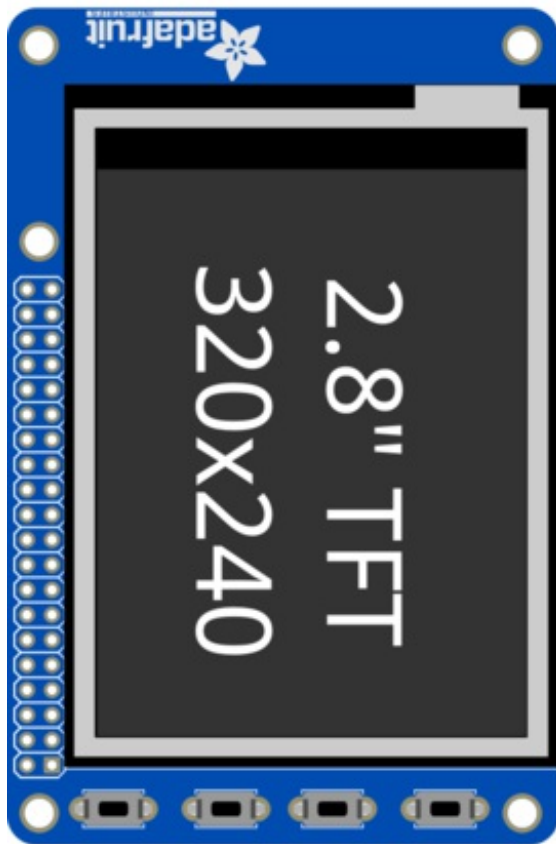

fritzing

Now you should be able to verify that the sensor is wired up correctly by asking the Pi to detect what addresses it can see on the I2C bus:

```
sudo i2cdetect -y 1
```

```

pi@deanspi:~ $ sudo i2cdetect -y 1
    0  1  2  3  4  5  6  7  8  9  a  b  c  d  e  f
00:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
10:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
20:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
30:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
40:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
50:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
60:  -- -- -- -- -- -- -- -- 69 -- -- -- -- --
70:  -- -- -- -- -- -- -- -- -- -- -- -- -- --
pi@deanspi:~ $ █

```

It should show up under it's default address (**0x69**). If you don't see 69, check your wiring, did you install I2C support, etc?

Run example code

At long last, we are finally ready to run our example code

```


cd ~/
git clone https://github.com/adafruit/Adafruit_AMG88xx_python.git
cd Adafruit_AMG88xx_python/examples
sudo python thermal_cam.py

```

If you have everything installed and wired up correctly, you should see a nice thermal camera image. Cool tones (blue and purple) are cooler temperatures, and warmer tones (yellow, red) are warmer temperatures.

If your image seems to be flipped on the screen, try changing the orientation of the AMG8833 breakout on the breadboard.

If you're interested in the details, and want to know more about how we made 64 pixels look like many more, it's called [bicubic interpolation](http://adafru.it/xgA) (<http://adafru.it/xgA>) ([hat tip to OSHpark for the idea](http://adafru.it/xgB) (<http://adafru.it/xgB>)!)

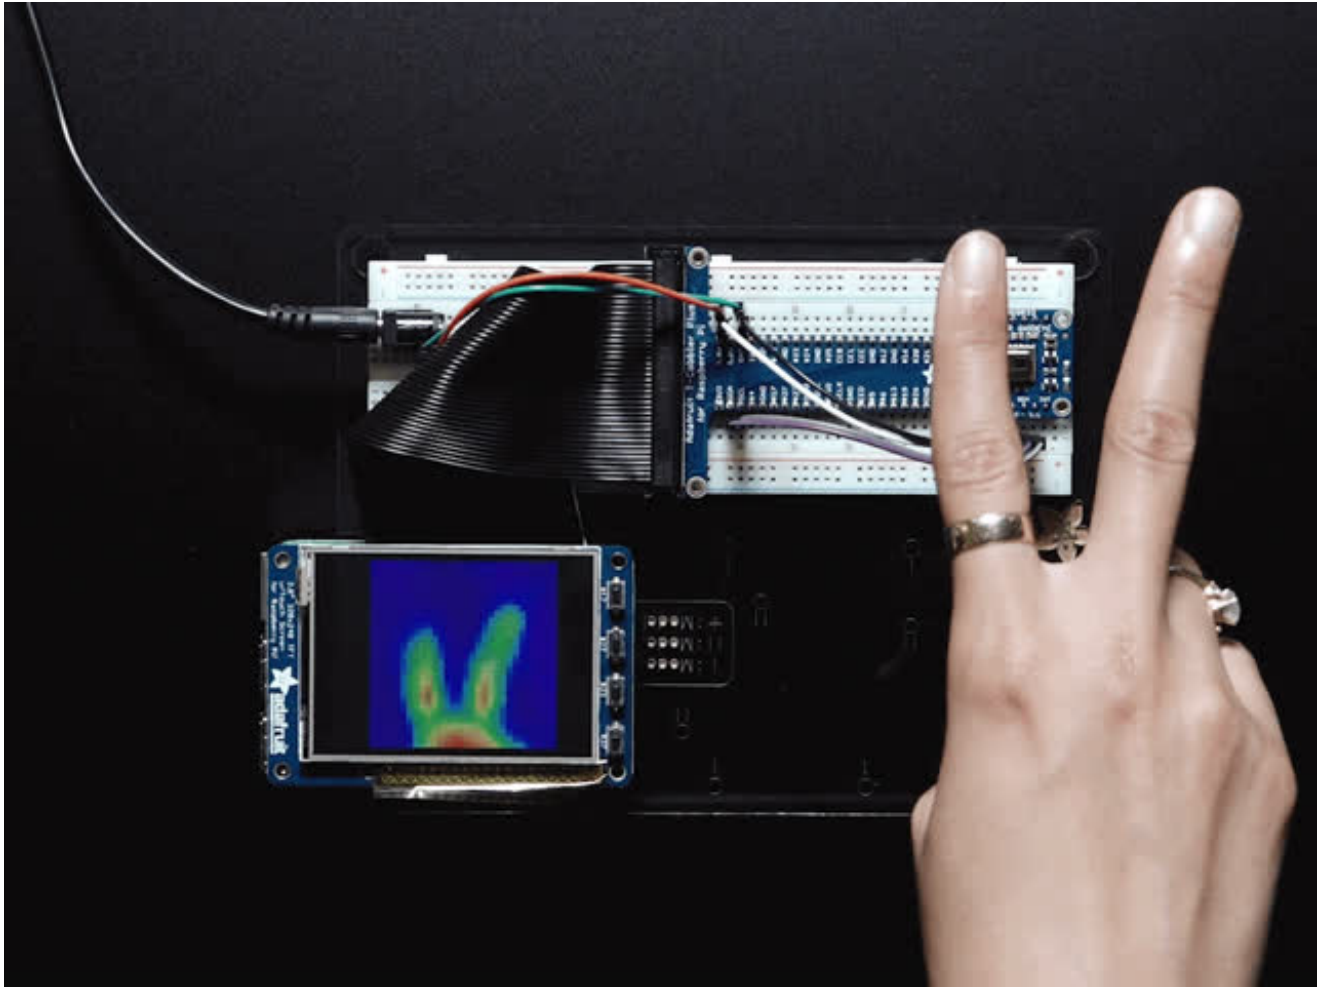


Downloads

Documents

- [AMG8833 datasheet](http://adafru.it/xgE) (<http://adafru.it/xgE>)
- [AMG8833 Arduino Driver](http://adafru.it/xfw) (<http://adafru.it/xfw>)
- [Fritzing object in the Adafruit Fritzing library](http://adafru.it/aP3) (<http://adafru.it/aP3>)
- [AMG8833 python driver](http://adafru.it/xgF) (<http://adafru.it/xgF>)
- [AMG8833 CircuitPython Driver](http://adafru.it/xha) (<http://adafru.it/xha>)
- [AMG8833 breakout PCB files \(EAGLE format\)](http://adafru.it/xhb) (<http://adafru.it/xhb>)

Schematic

click to enlarge

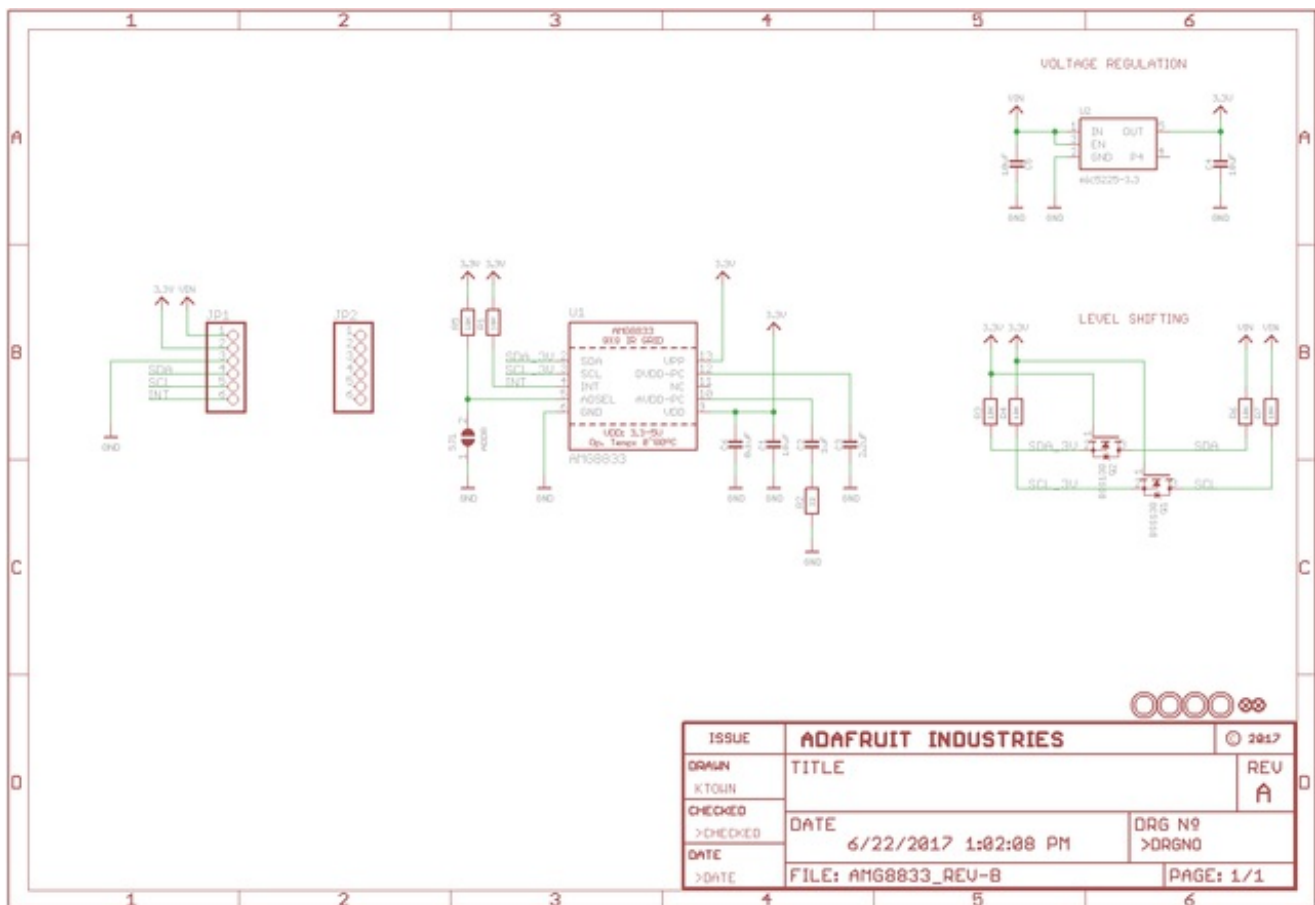

Dimensions

in inches. Click to enlarge

