



A




C





D

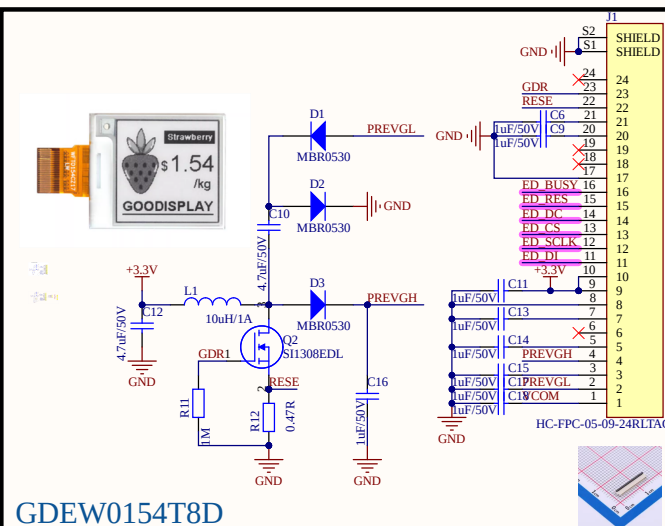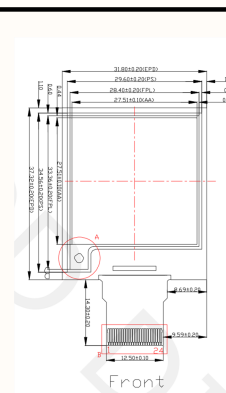

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

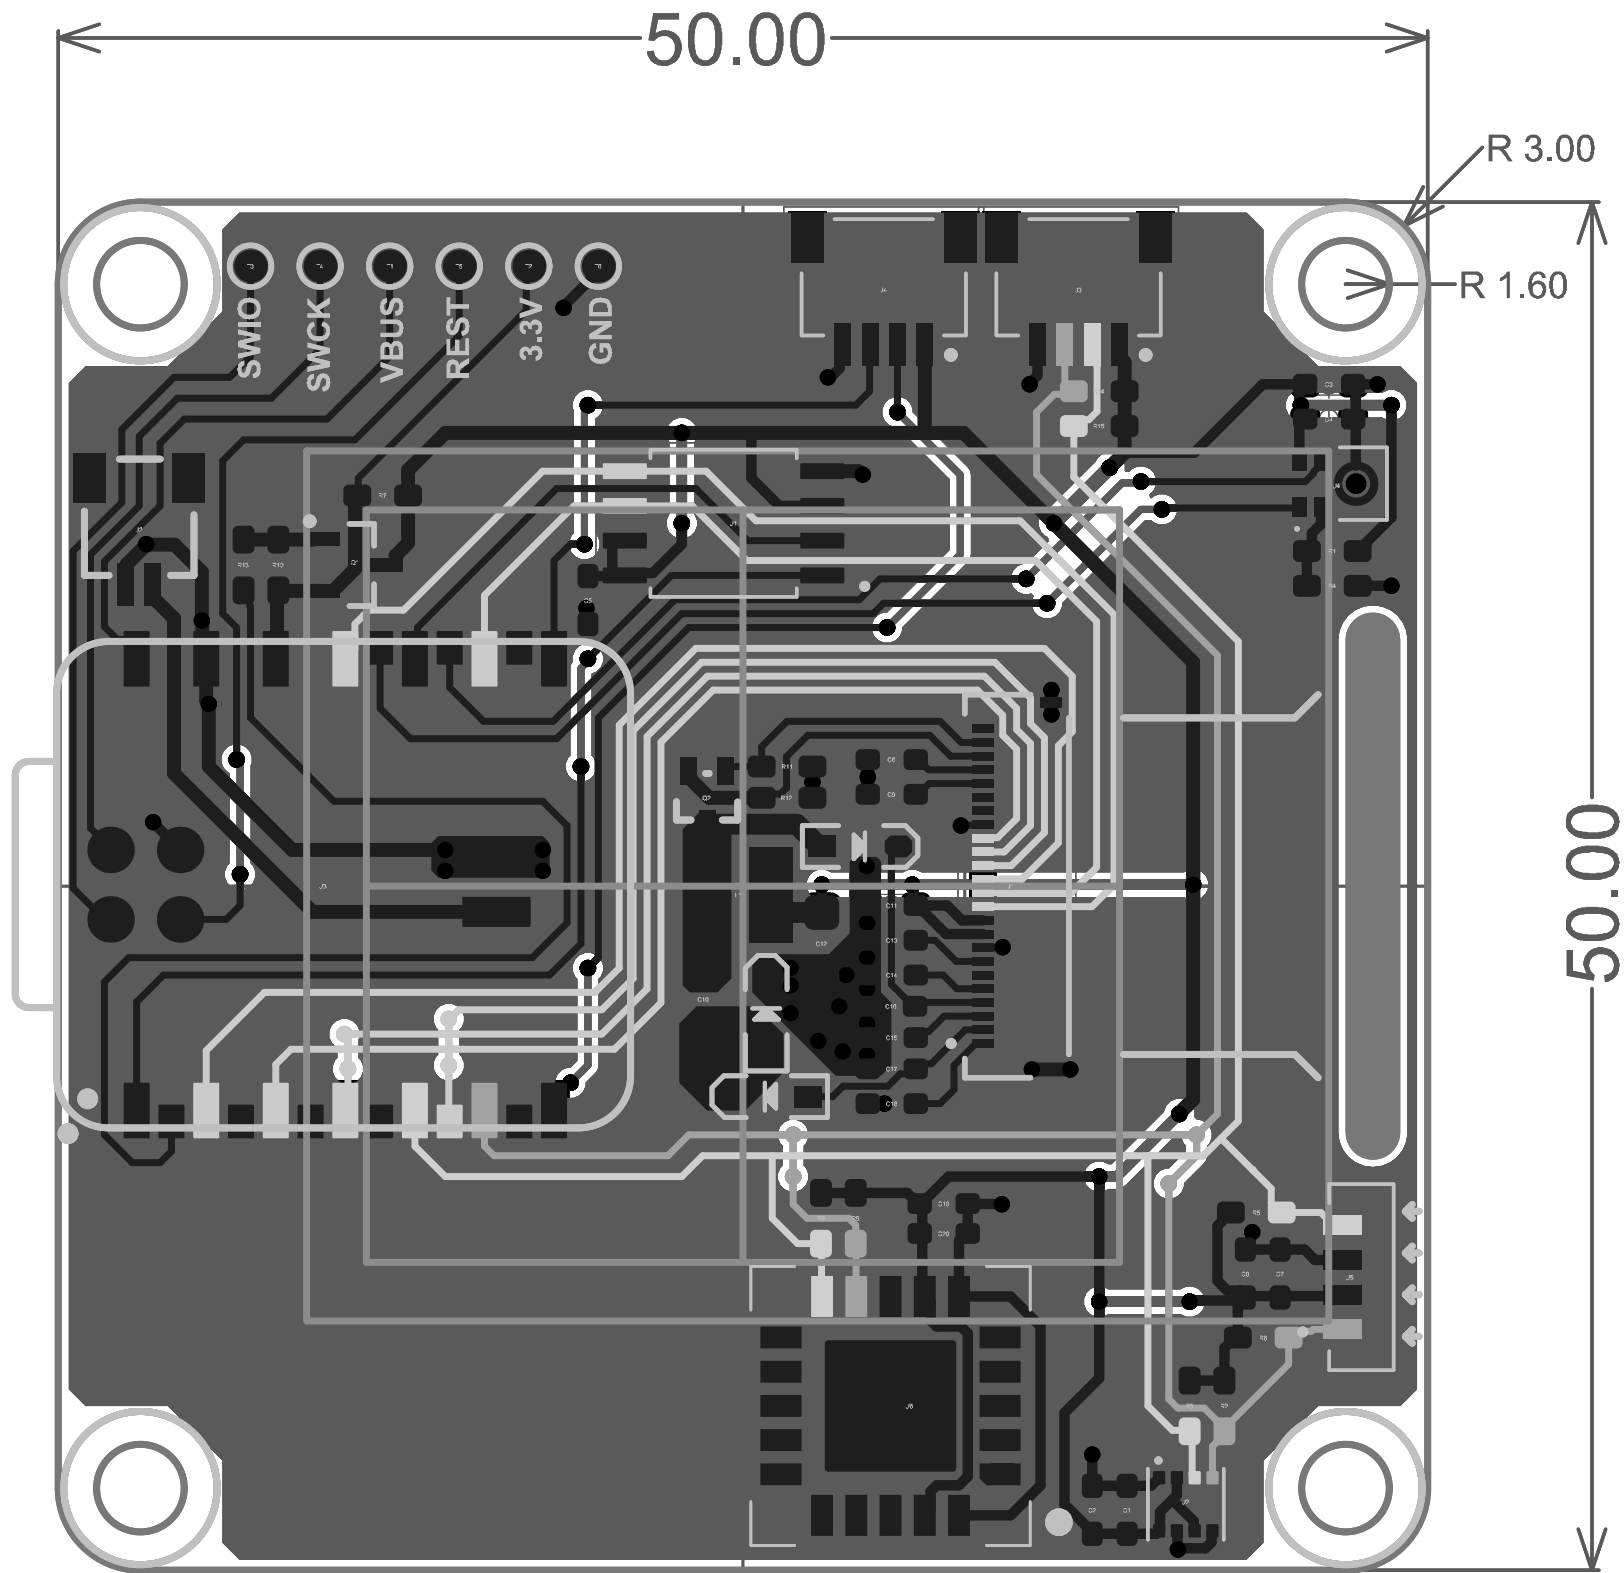

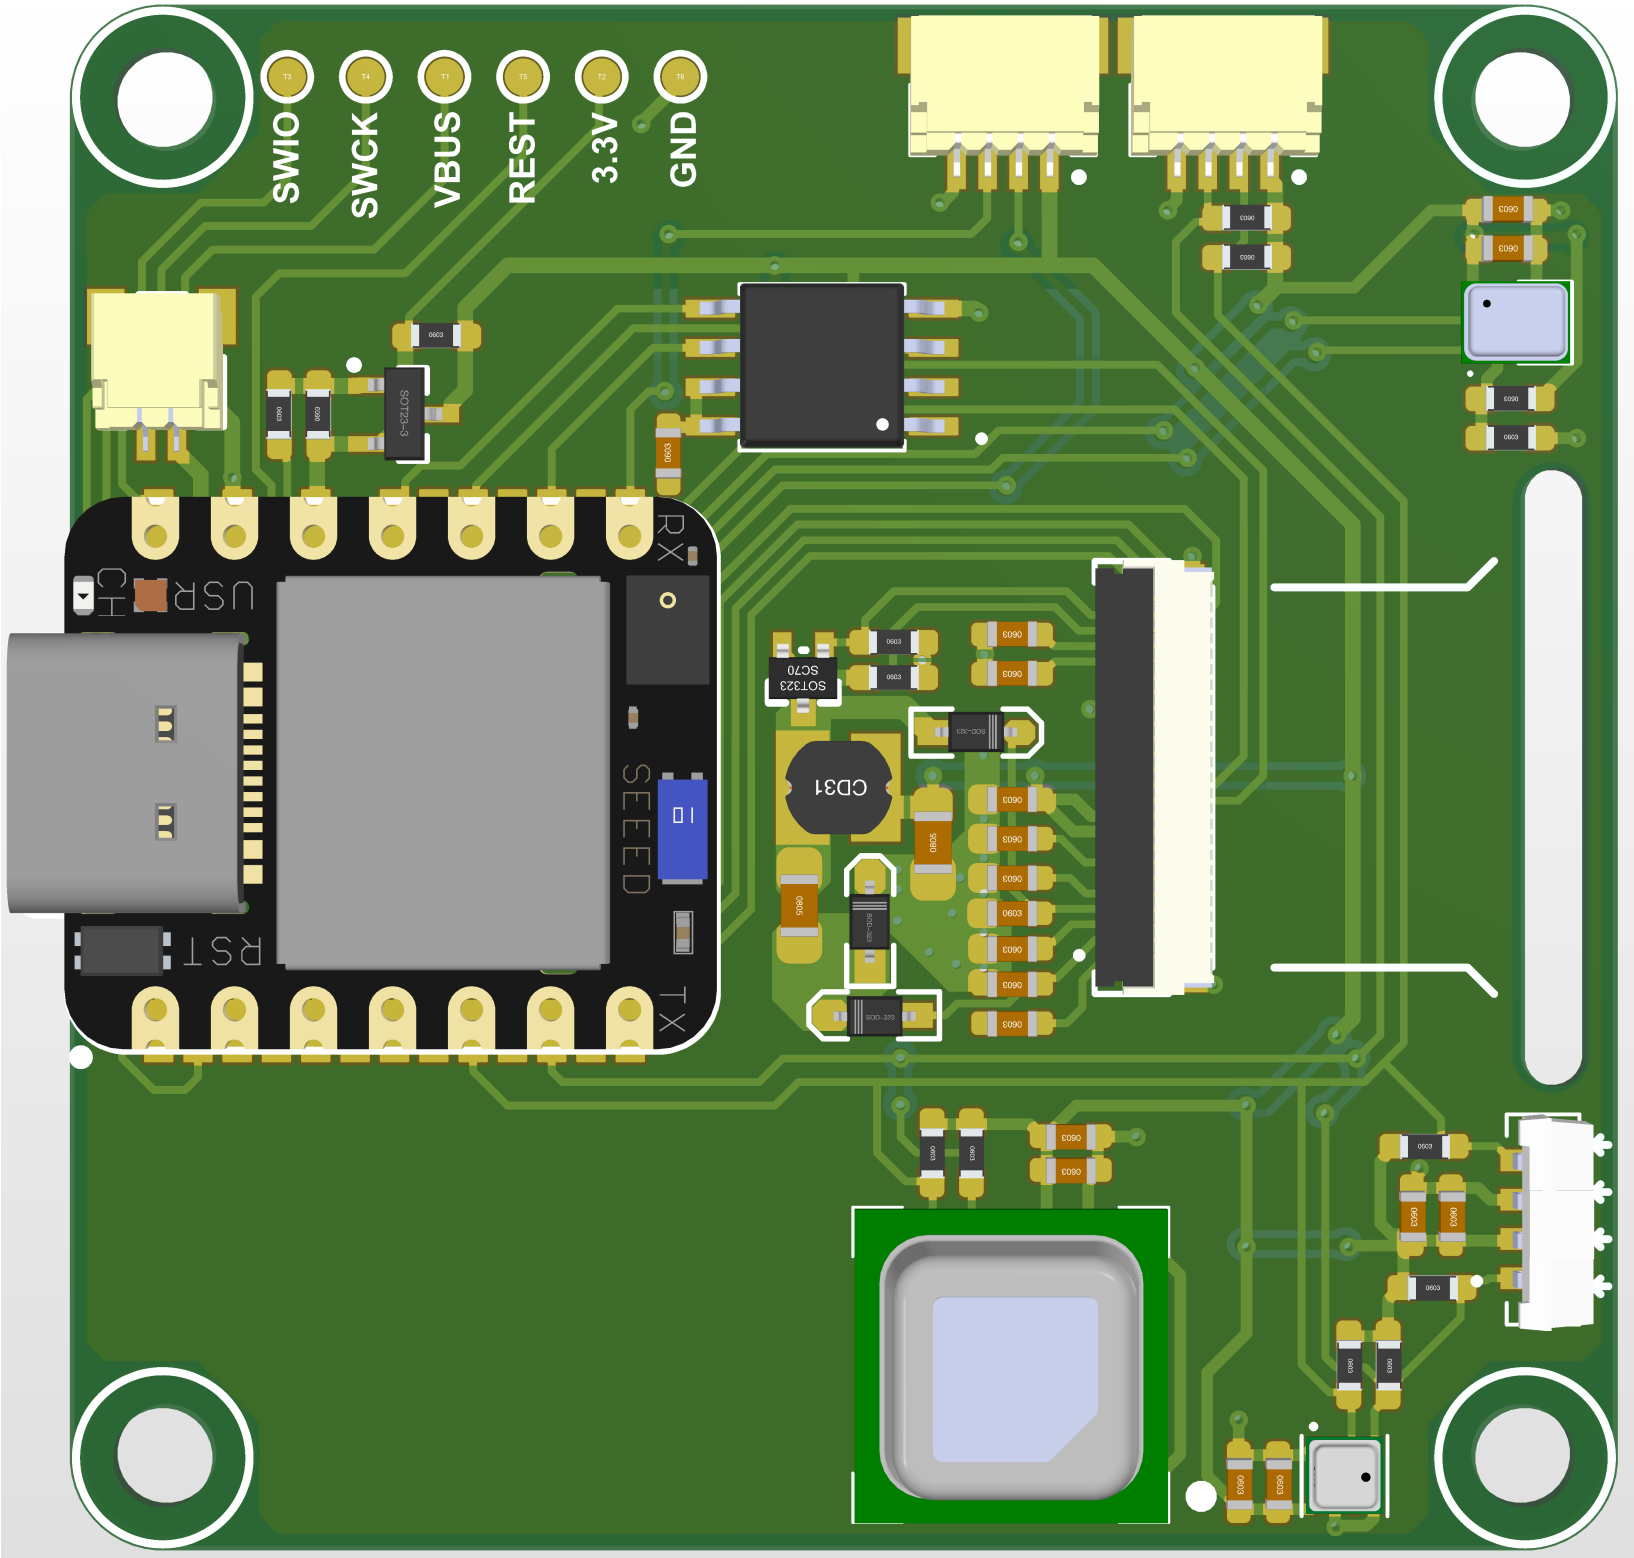

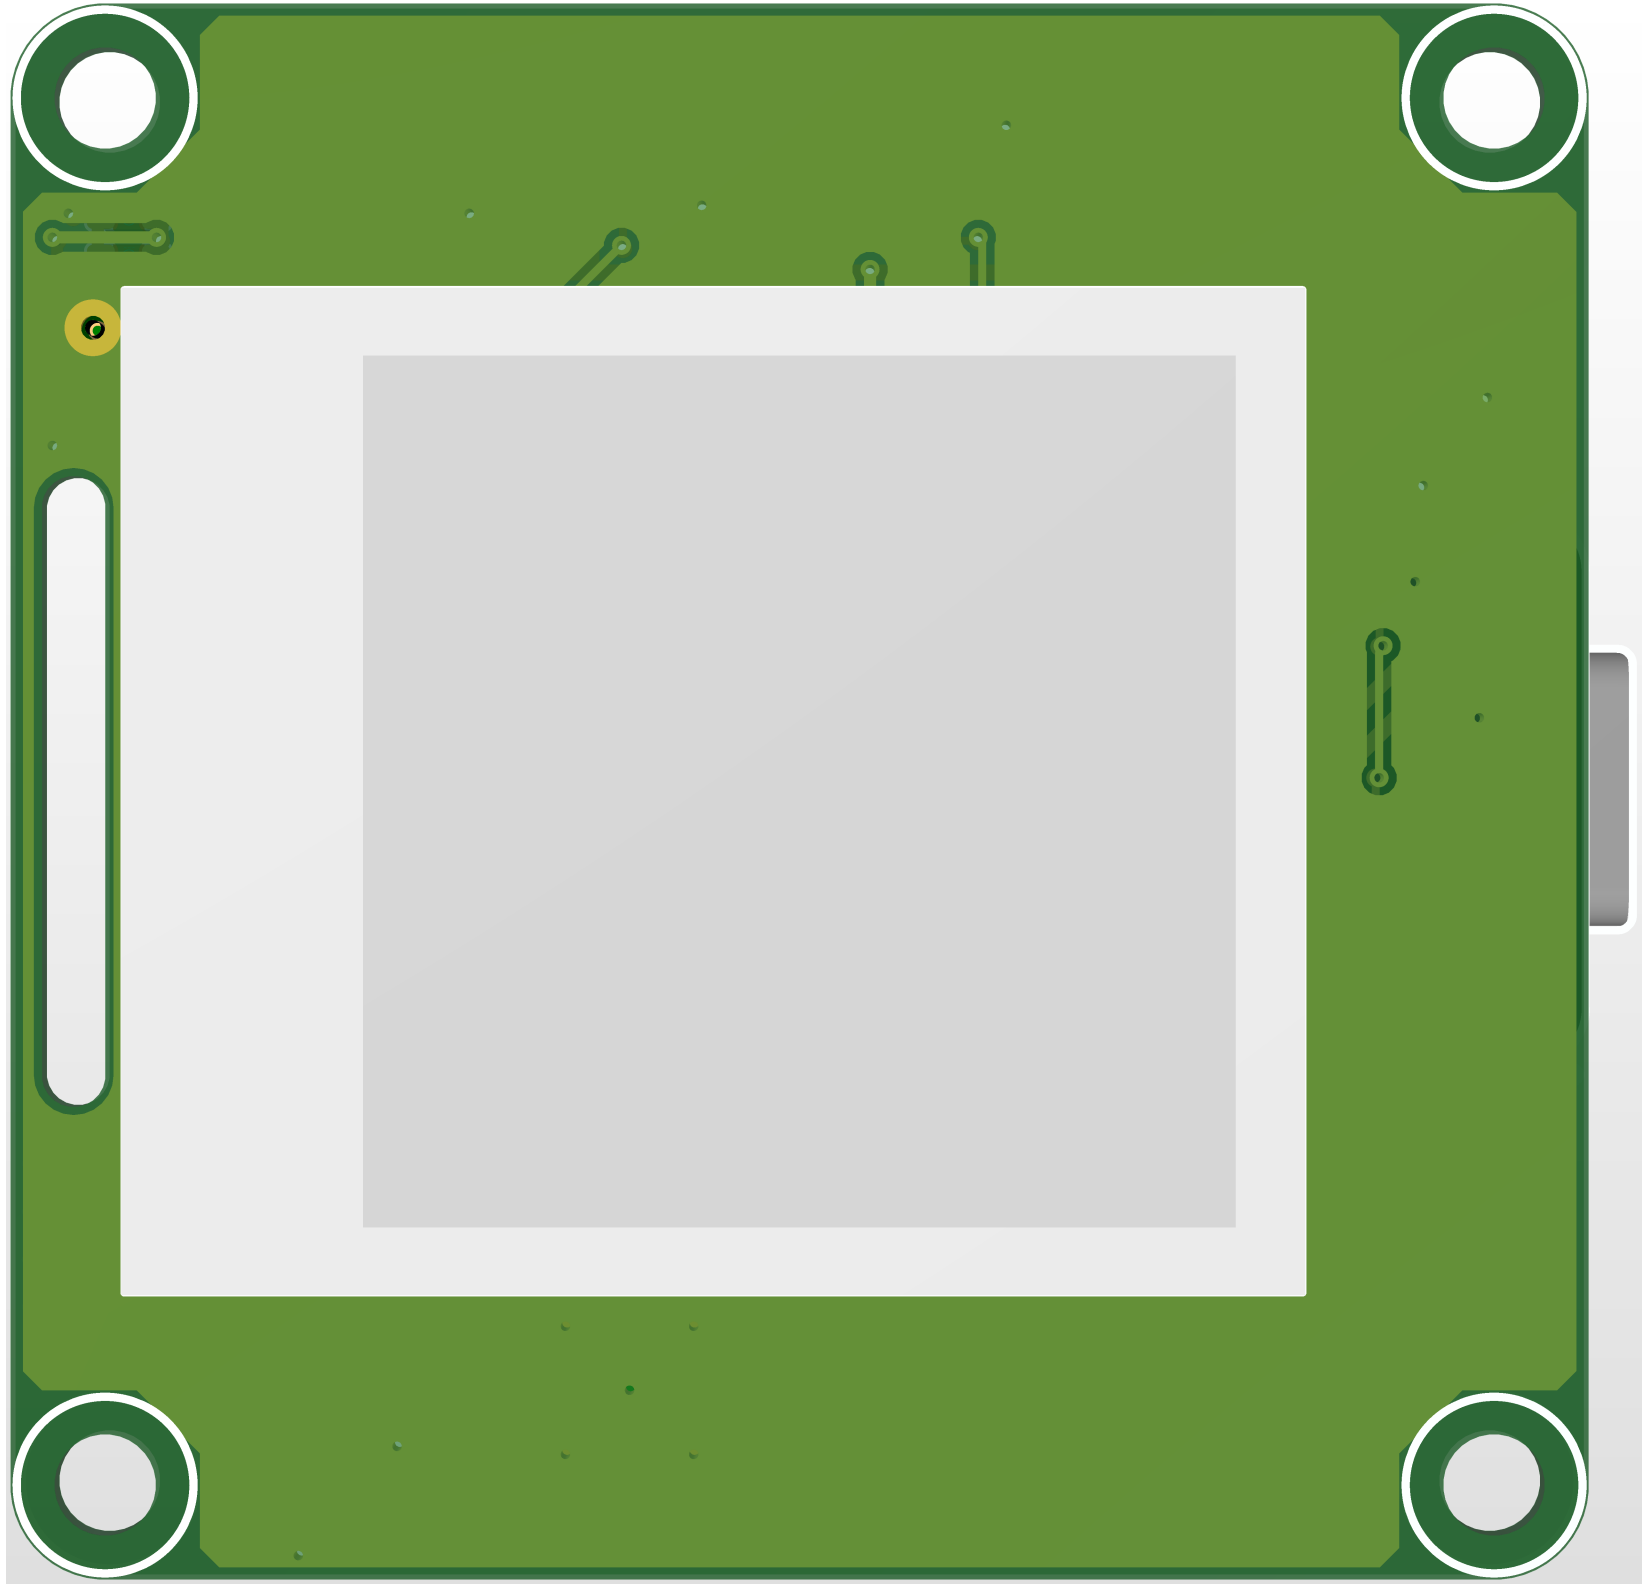

Comment	Description	Designator	Footprint	LibRef	Quantity
0.1uF/50V		C1, C3, C5, C7, C19	C 0603	CAP	5
10uF/10V		C2, C4, C8, C20	C 0603	CAP	4
1uF/50V		C6, C9, C11, C13, C14, C15, C16, C17, C18	C 0603	CAP	9
4.7uF/50V		C10, C12	C 0805	CAP	2
MBR0530	High Conductance Fast Diode	D1, D2, D3	SOD-323	D 1N4148	3
HC-FPC-05-09-24RLTAG	24 Position FFC, FPC Connector Contacts, Top and Bottom 0.020 (0.50mm) Surface Mount, Right Angle	J1	GCT_FFC2B28-24-G	FFC2B28-24-G	1
SM02B-SRSS-TB(LF)(SN)	Connector Header Surface Mount, Right Angle 2 position 0.039 (1.00mm)	J2	SM02B-SRSS-TB(LF)(SN)	SM02B-SRSS-TB(LF)(SN)	1
SM04B-GHS-TB(LF)(SN)	Connector Header Surface Mount, Right Angle 4 position 0.049 (1.25mm)	J3, J4	JST_SM04B-SRSS-TB(LF)(SN)	SM04B-GHS-TB(LF)(SN)	2
10uH/1A		L1	CD31	INDUCTOR	1
AO3401	P-Channel 30 V 4A (Ta) 1.4W (Ta) Surface Mount SOT-23-3	Q1	SOT23-3N	AO3401	1
SI1308EDL	N-Channel 30 V 5.8A (Ta) 1.4W (Ta) Surface Mount SOT-23-3	Q2	SOT323	AO3400	1
NC	Resistor	R1, R2, R3, R5, R6, R7, R8, R9	R 0603	RES2	8
0R	Resistor	R4	R 0603	RES2	1
10K	Resistor	R10	R 0603	RES2	1
1M	Resistor	R11	R 0603	RES2	1
0.47R	Resistor	R12	R 0603	RES2	1
100R	Resistor	R13	R 0603	RES2	1
4.7K	Resistor	R14, R15	R 0603	RES2	2
PAD 1.2mm		T1, T2, T3, T4, T5, T6	TEST 1.2	TEST	6
W25Q64JVSSIQ	FLASH - NOR Memory IC 64Mb (8M x 8) SPI 80 MHz 8-SOIC	U1	SOIC127P790X216-8N	W25Q64BVSSIG	1
BME280	DIGITAL HUMIDITY, PRESSURE AND TEMPERATURE SENSOR * Digital interface I ² C (up to 3.4 MHz) and SPI (3 and 4 wire, up to 10 MHz)* Supply voltage VDD main supply voltage range: 1.71 V to 3.6 V*VDDIO interface voltage range: 1.2 V to 3.6 V Operating range - 40â€¦+85 Â°C, 0â€¦100 % rel. humidity, 300â€¦1100 hPa The library has been designed byRichard Magdycz	U2	PSON65P250X250X100-8N	BME280	1
XIAO-nRF52840-Plus	XIAO-nRF52840-Plus	U3	XIAO-nRF52840-Plus	XIAO-nRF52840-Plus	1
SPH0641LU4H-1	100 Hz ~ 80 kHz Digital, PDM Microphone MEMS (Silicon) 1.62 V ~ 3.6 V Omnidirectional (-26dB Â±1dB @ 94dB SPL) Solder Pads	U4	MIC_SPH0641LU4H-1	SPH0641LU4H-1	1
VEML7700-TR	Optical Sensor Ambient 545nm I2C 4-SMD, J-Lead	U5	XDCCR_VEML7700-TR	VEML7700-TR	1
SCD41-D-R1		U6	SCD4x	SCD4x	1