


DATE : 03 / 08 / 2015

SENSE_TOUCH BOARD


ASSEMBLY_TOP

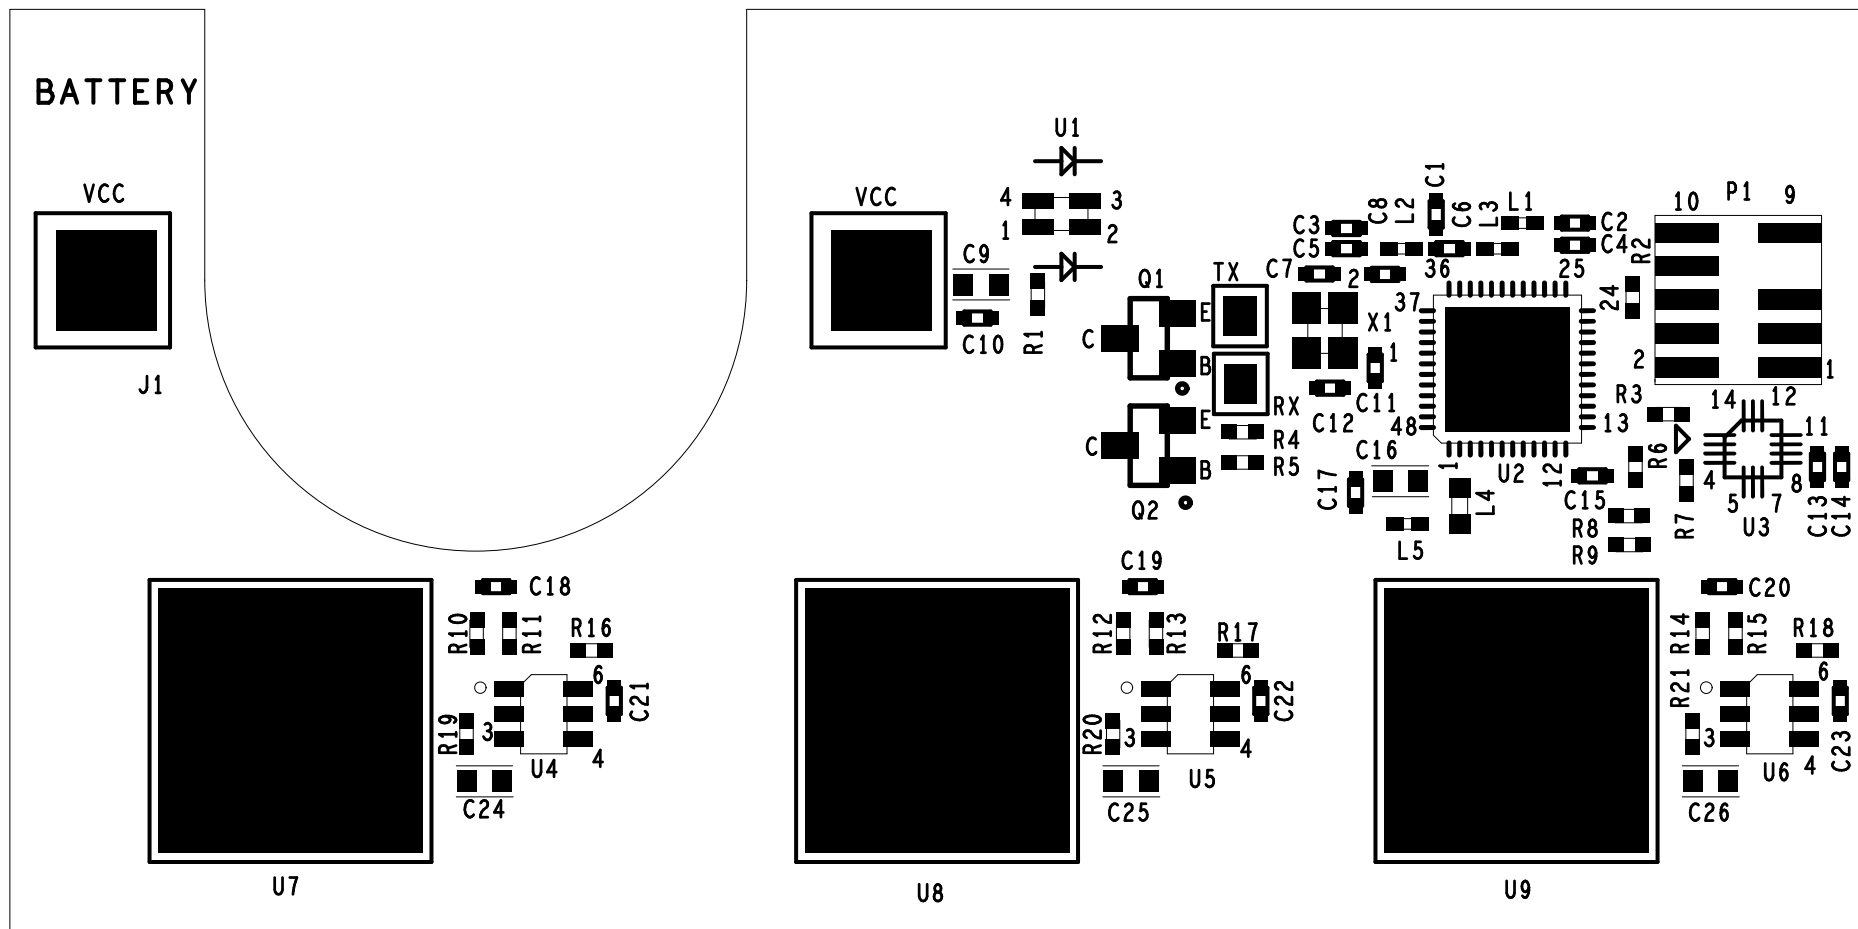


DATE: 03/08/2015

SENSE_TOUCH BOARD

L01_TOP

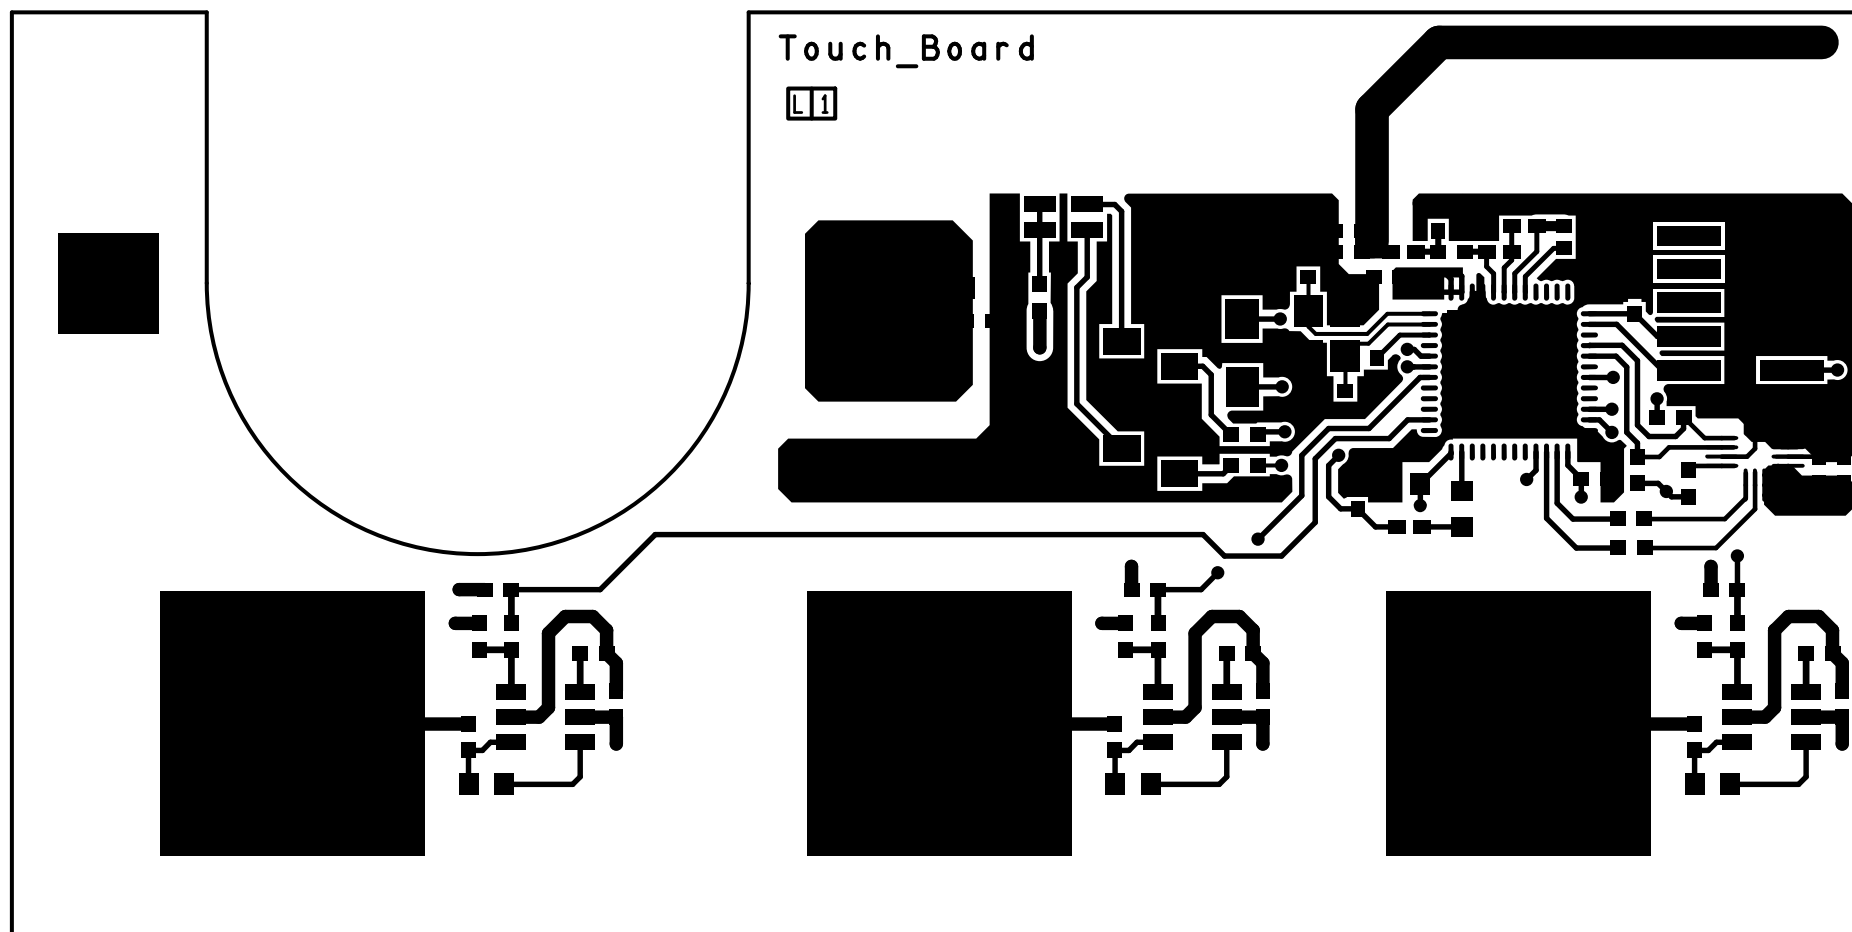

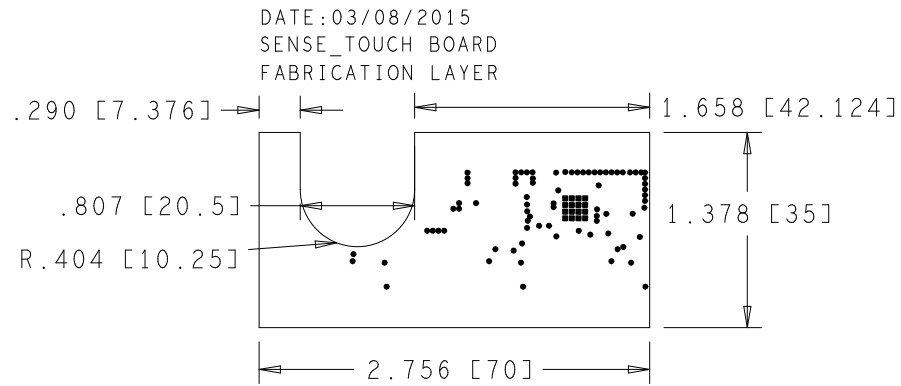

NOTES:

1. ALL ARTWORK PATTERNS ARE VIEWED FROM THE TOP.
2. PLATING FINISH METHOD SHALL BE HASL
3. SOLDER MASK OVER BARE COPPER (SMOBC) SHALL BE ON BOTH SIDES.
4. MASK COLOUR IS GREEN AND TYPE IS LPI
5. BOARD THICKNESS IS 1.6 MM
6. COPPER THICKNESS
FOR OUTER LAYERS IS 35 MICRONS
FOR INNER LAYERS IS 35 MICRONS
7. PCB MATERIAL IS FR4
8. STACKUP SPECIFICATIONS IS AS FOLLOWS
9. SIGNAL TRACE WIDTH 7 MILS POWER TRACEWIDTH 20 MILS (MIN 8 MILS)
10. IF VIA IN PAD (VIP) SHOULD BE FILLED AND PLATED WITH PLANNER


DRILL CHART: TOP to BOTTOM				
ALL UNITS ARE IN MILS				
FIGURE	SIZE	TOLERANCE	PLATED	QTY
•	10.0	+3.0/-3.0	PLATED	78
▪	11.799	+3.0/-3.0	PLATED	16

62.992 MILS
(1.6 MM)

LAYER 1-TOP

LAYER 2-BOT


STACKUP INFO



DATE : 03/08/2015

SENSE_TOUCH BOARD


L02_BOTTOM

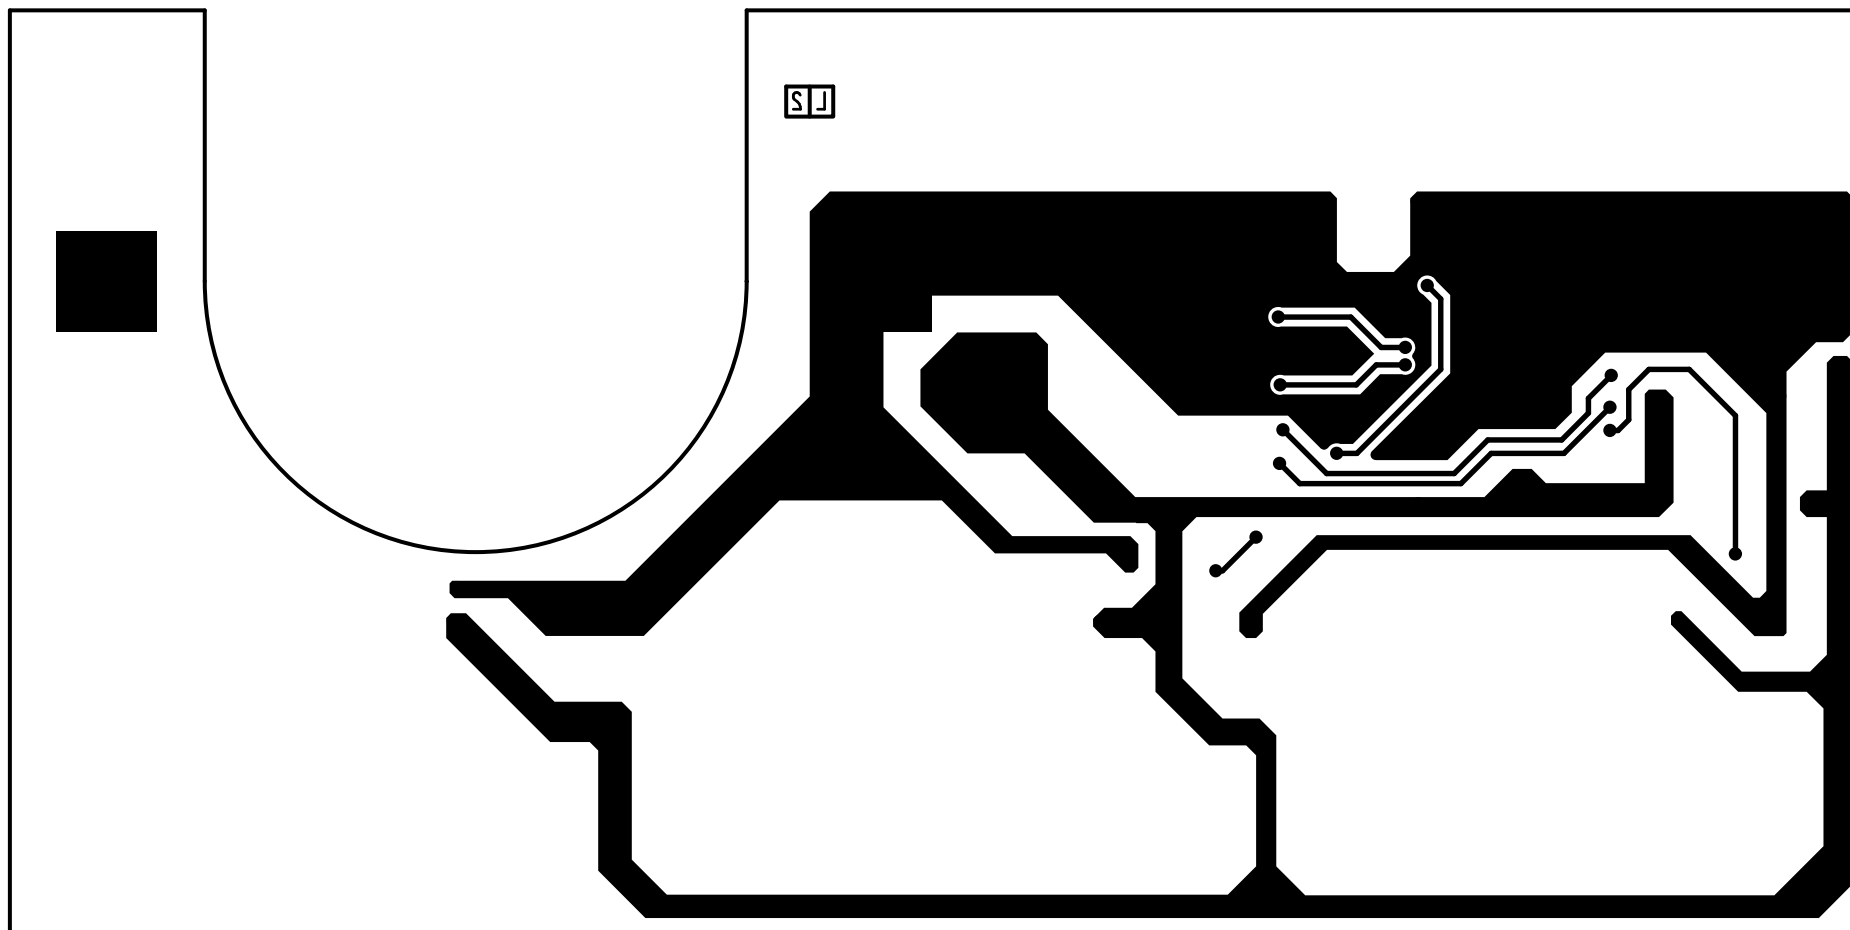

DATE : 03 / 08 / 2015

SENSE_TOUCH BOARD


PASTE_TOP

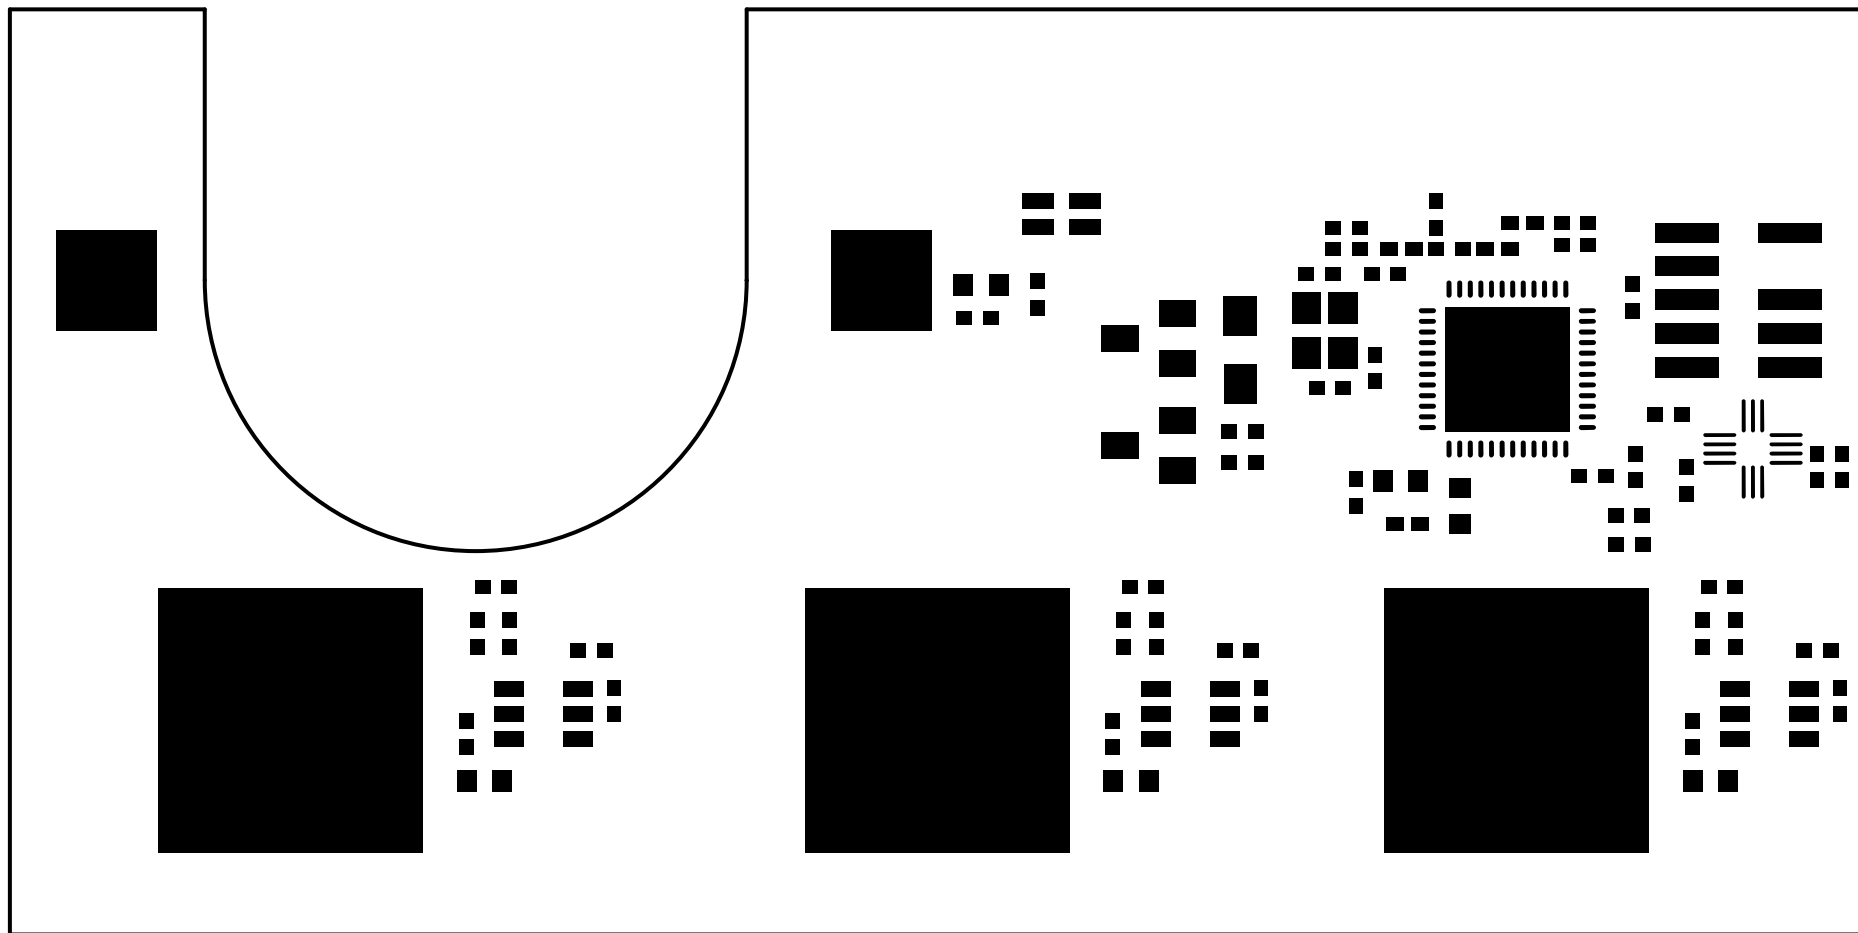

DATE : 03 / 08 / 2015

SENSE_TOUCH BOARD


PASTE_BOTTOM

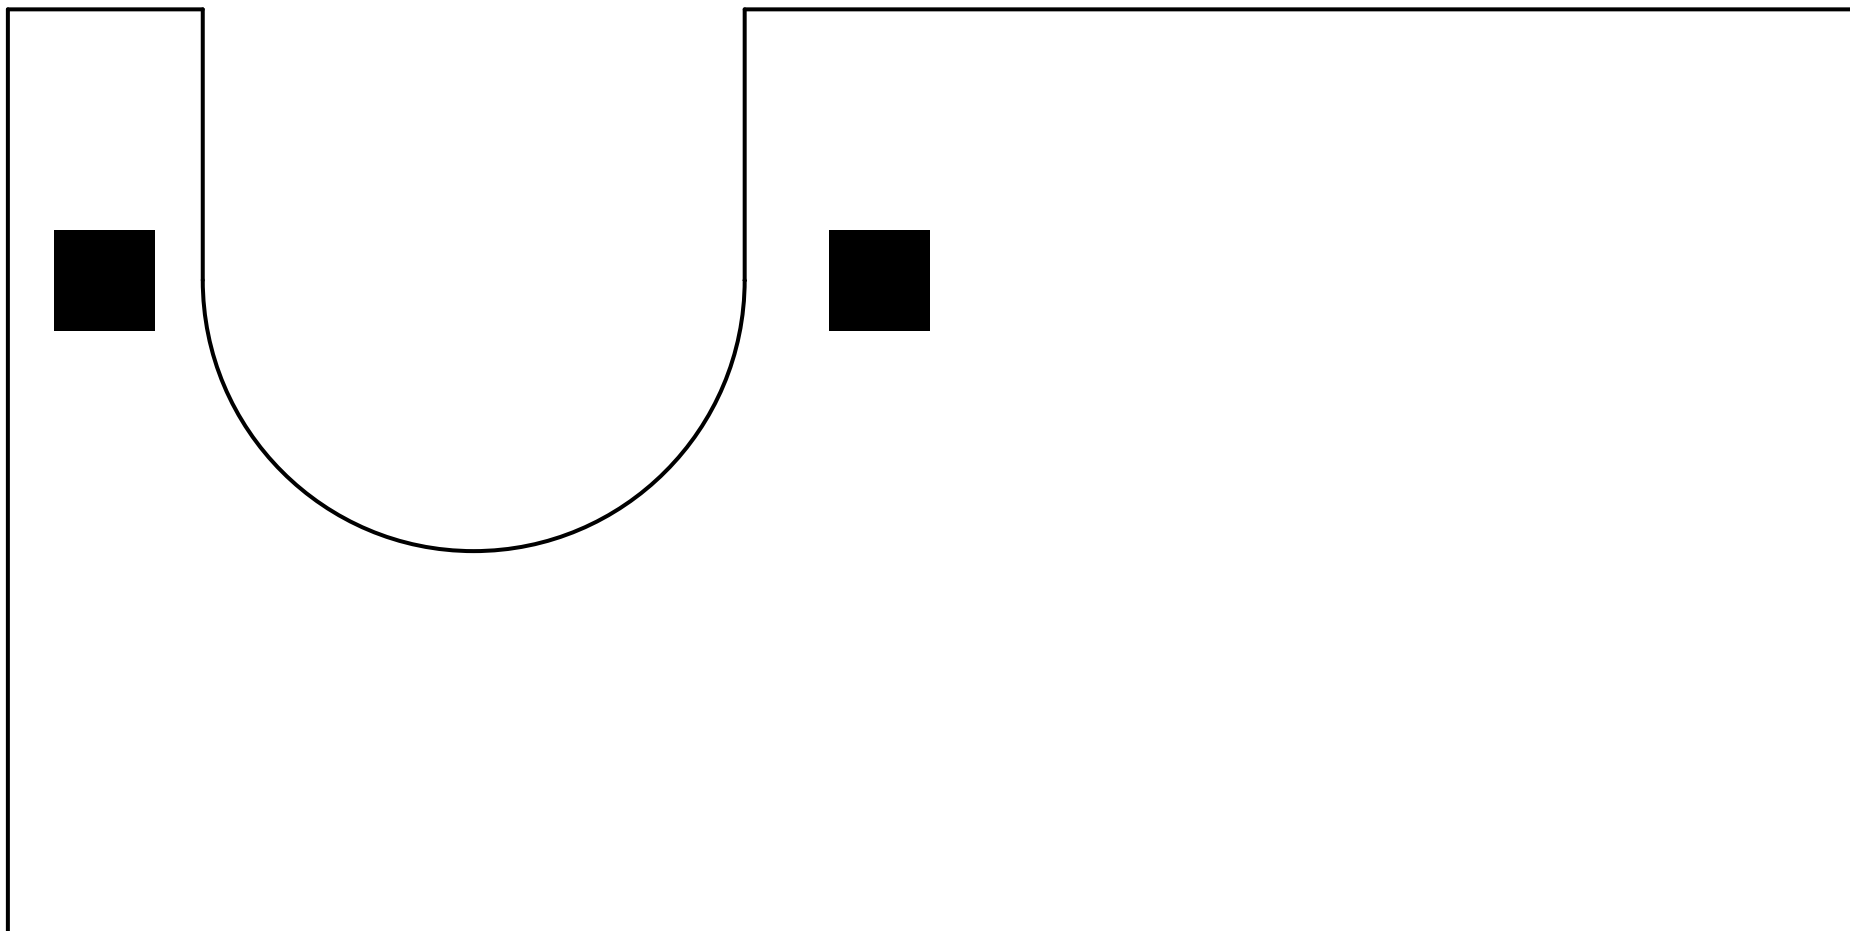

DATE : 03 / 08 / 2015

SENSE_TOUCH BOARD


SOLDMASK_TOP

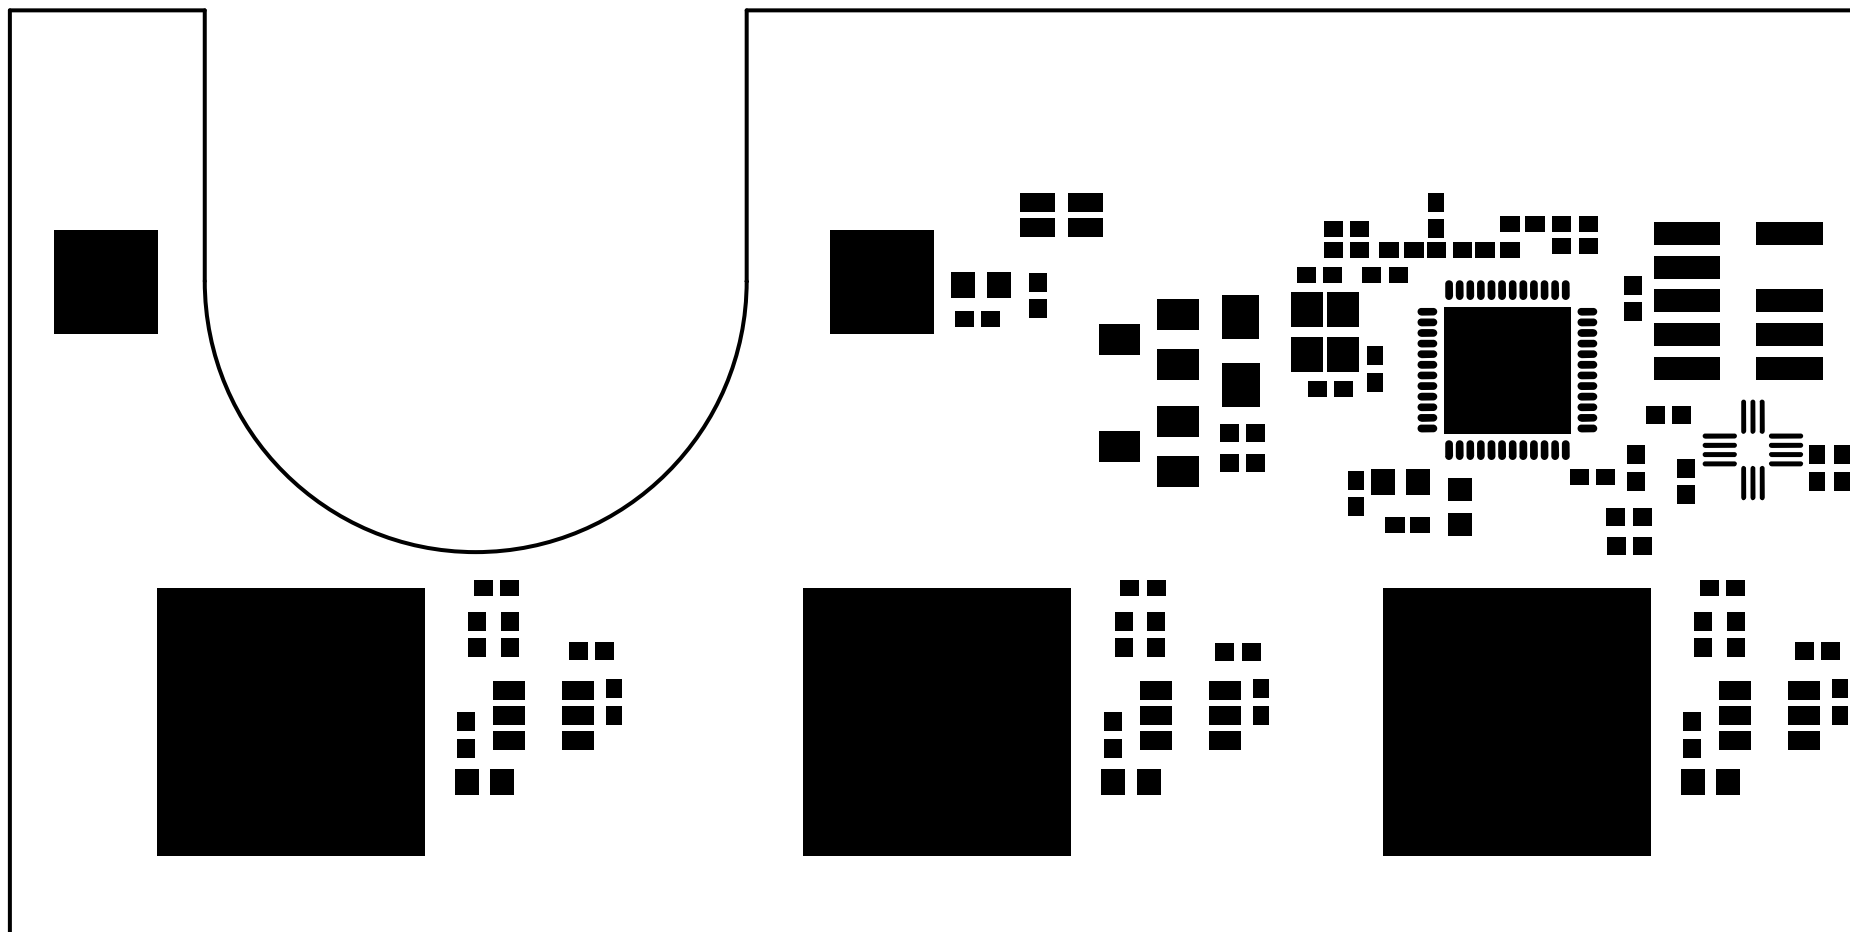

DATE : 03 / 08 / 2015

SENSE_TOUCH BOARD

SOLDMASK_BOTTOM

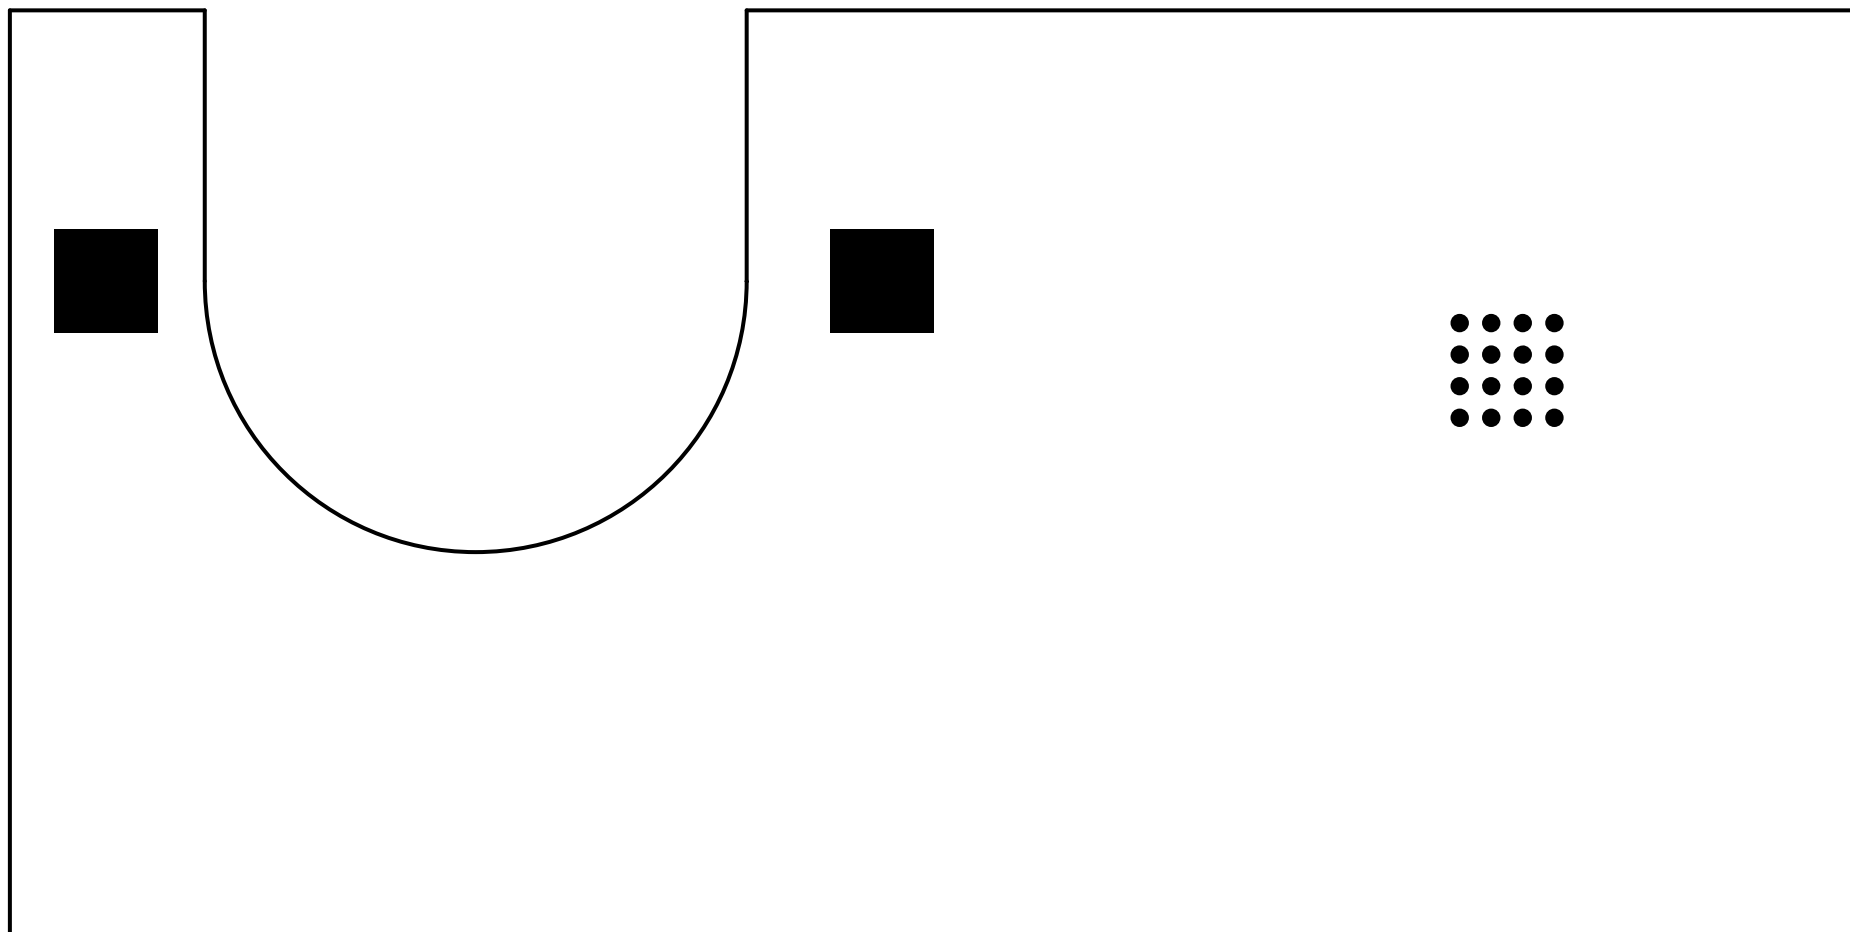

DATE: 03/08/2015
 SENSE_TOUCH_BOARD
 SILK_TOP

