


MCU + SECURE ELEMENT

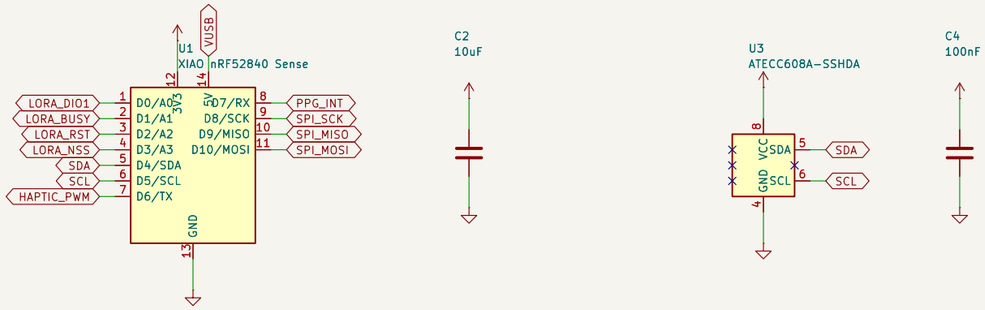


LoRa 868 MHz (SX1262)

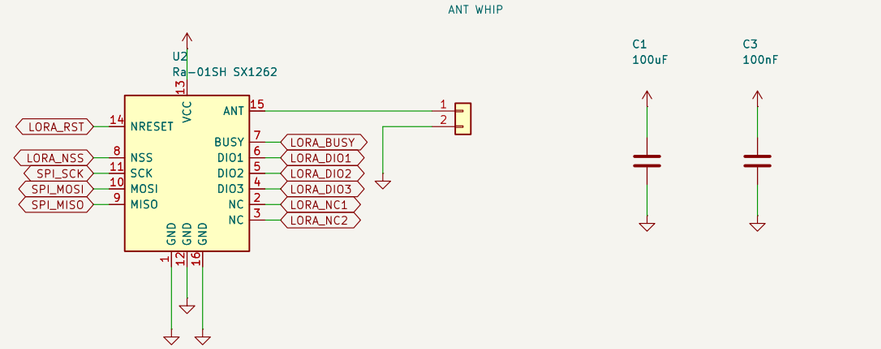


SENSORS — I2C BUS

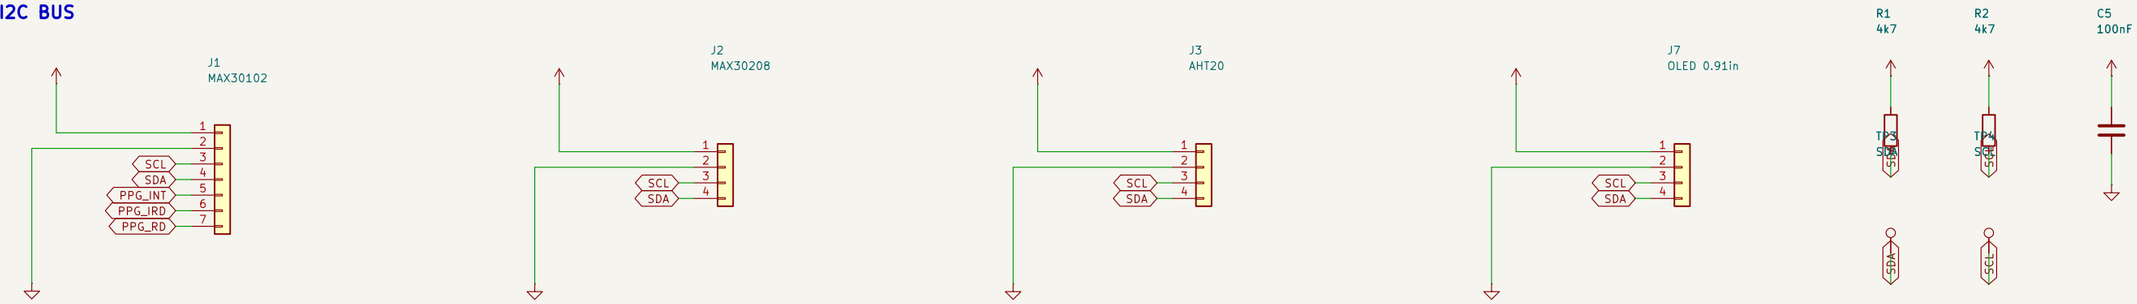

POWER + BATTERY PROTECTION

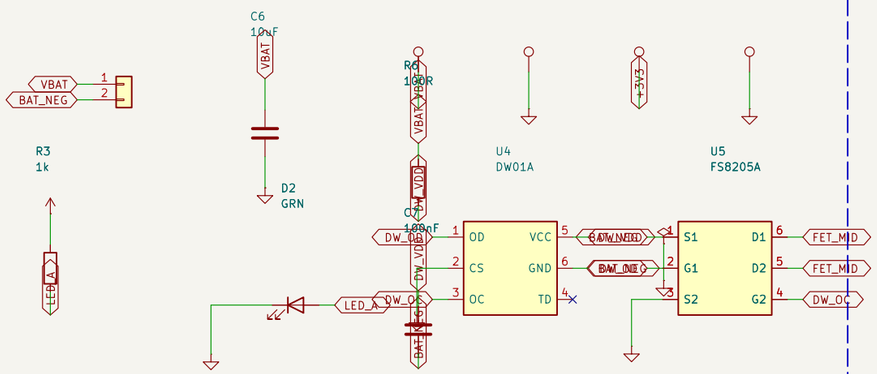

HAPTIC DRIVE

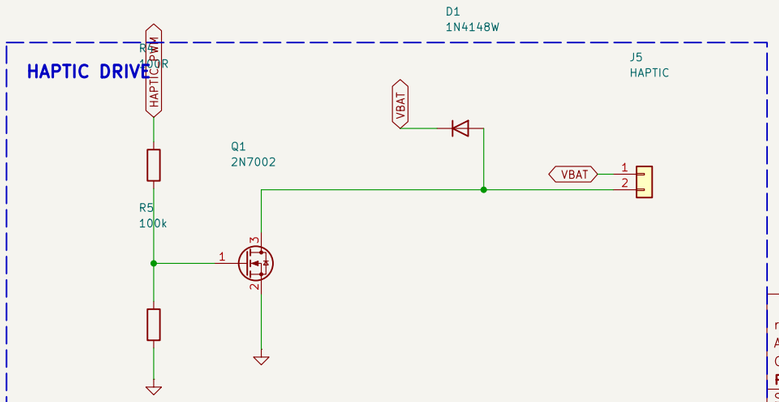

MECHANICAL



rev B: MAX30102, MAX30208, Ra-01SH SX1262 868 MHz, 0.91in OLED, DW01A+FS8205A
All 11 XIAO GPIO used: D0–D3 LoRa, D4/D5 I2C, D6 haptic, D7 PPG, D8–D10 SPI
Generated from scripts/design.py — the same netlist builds the PCB
Point Break — SIH 2026 — PS 26181

Sheet: /
File: PRAHARI.kicad_sch

Title: PRAHARI — The Countdown Band, carrier board

Size: A3	Date: 2026-09-02	**Rev: B**
KiCad E.D.A. 10.0.5		Id: 1/1