

--	--

--

--

--	--



Title:


Size: A.


KiCad E

7


Id: 1/5

101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

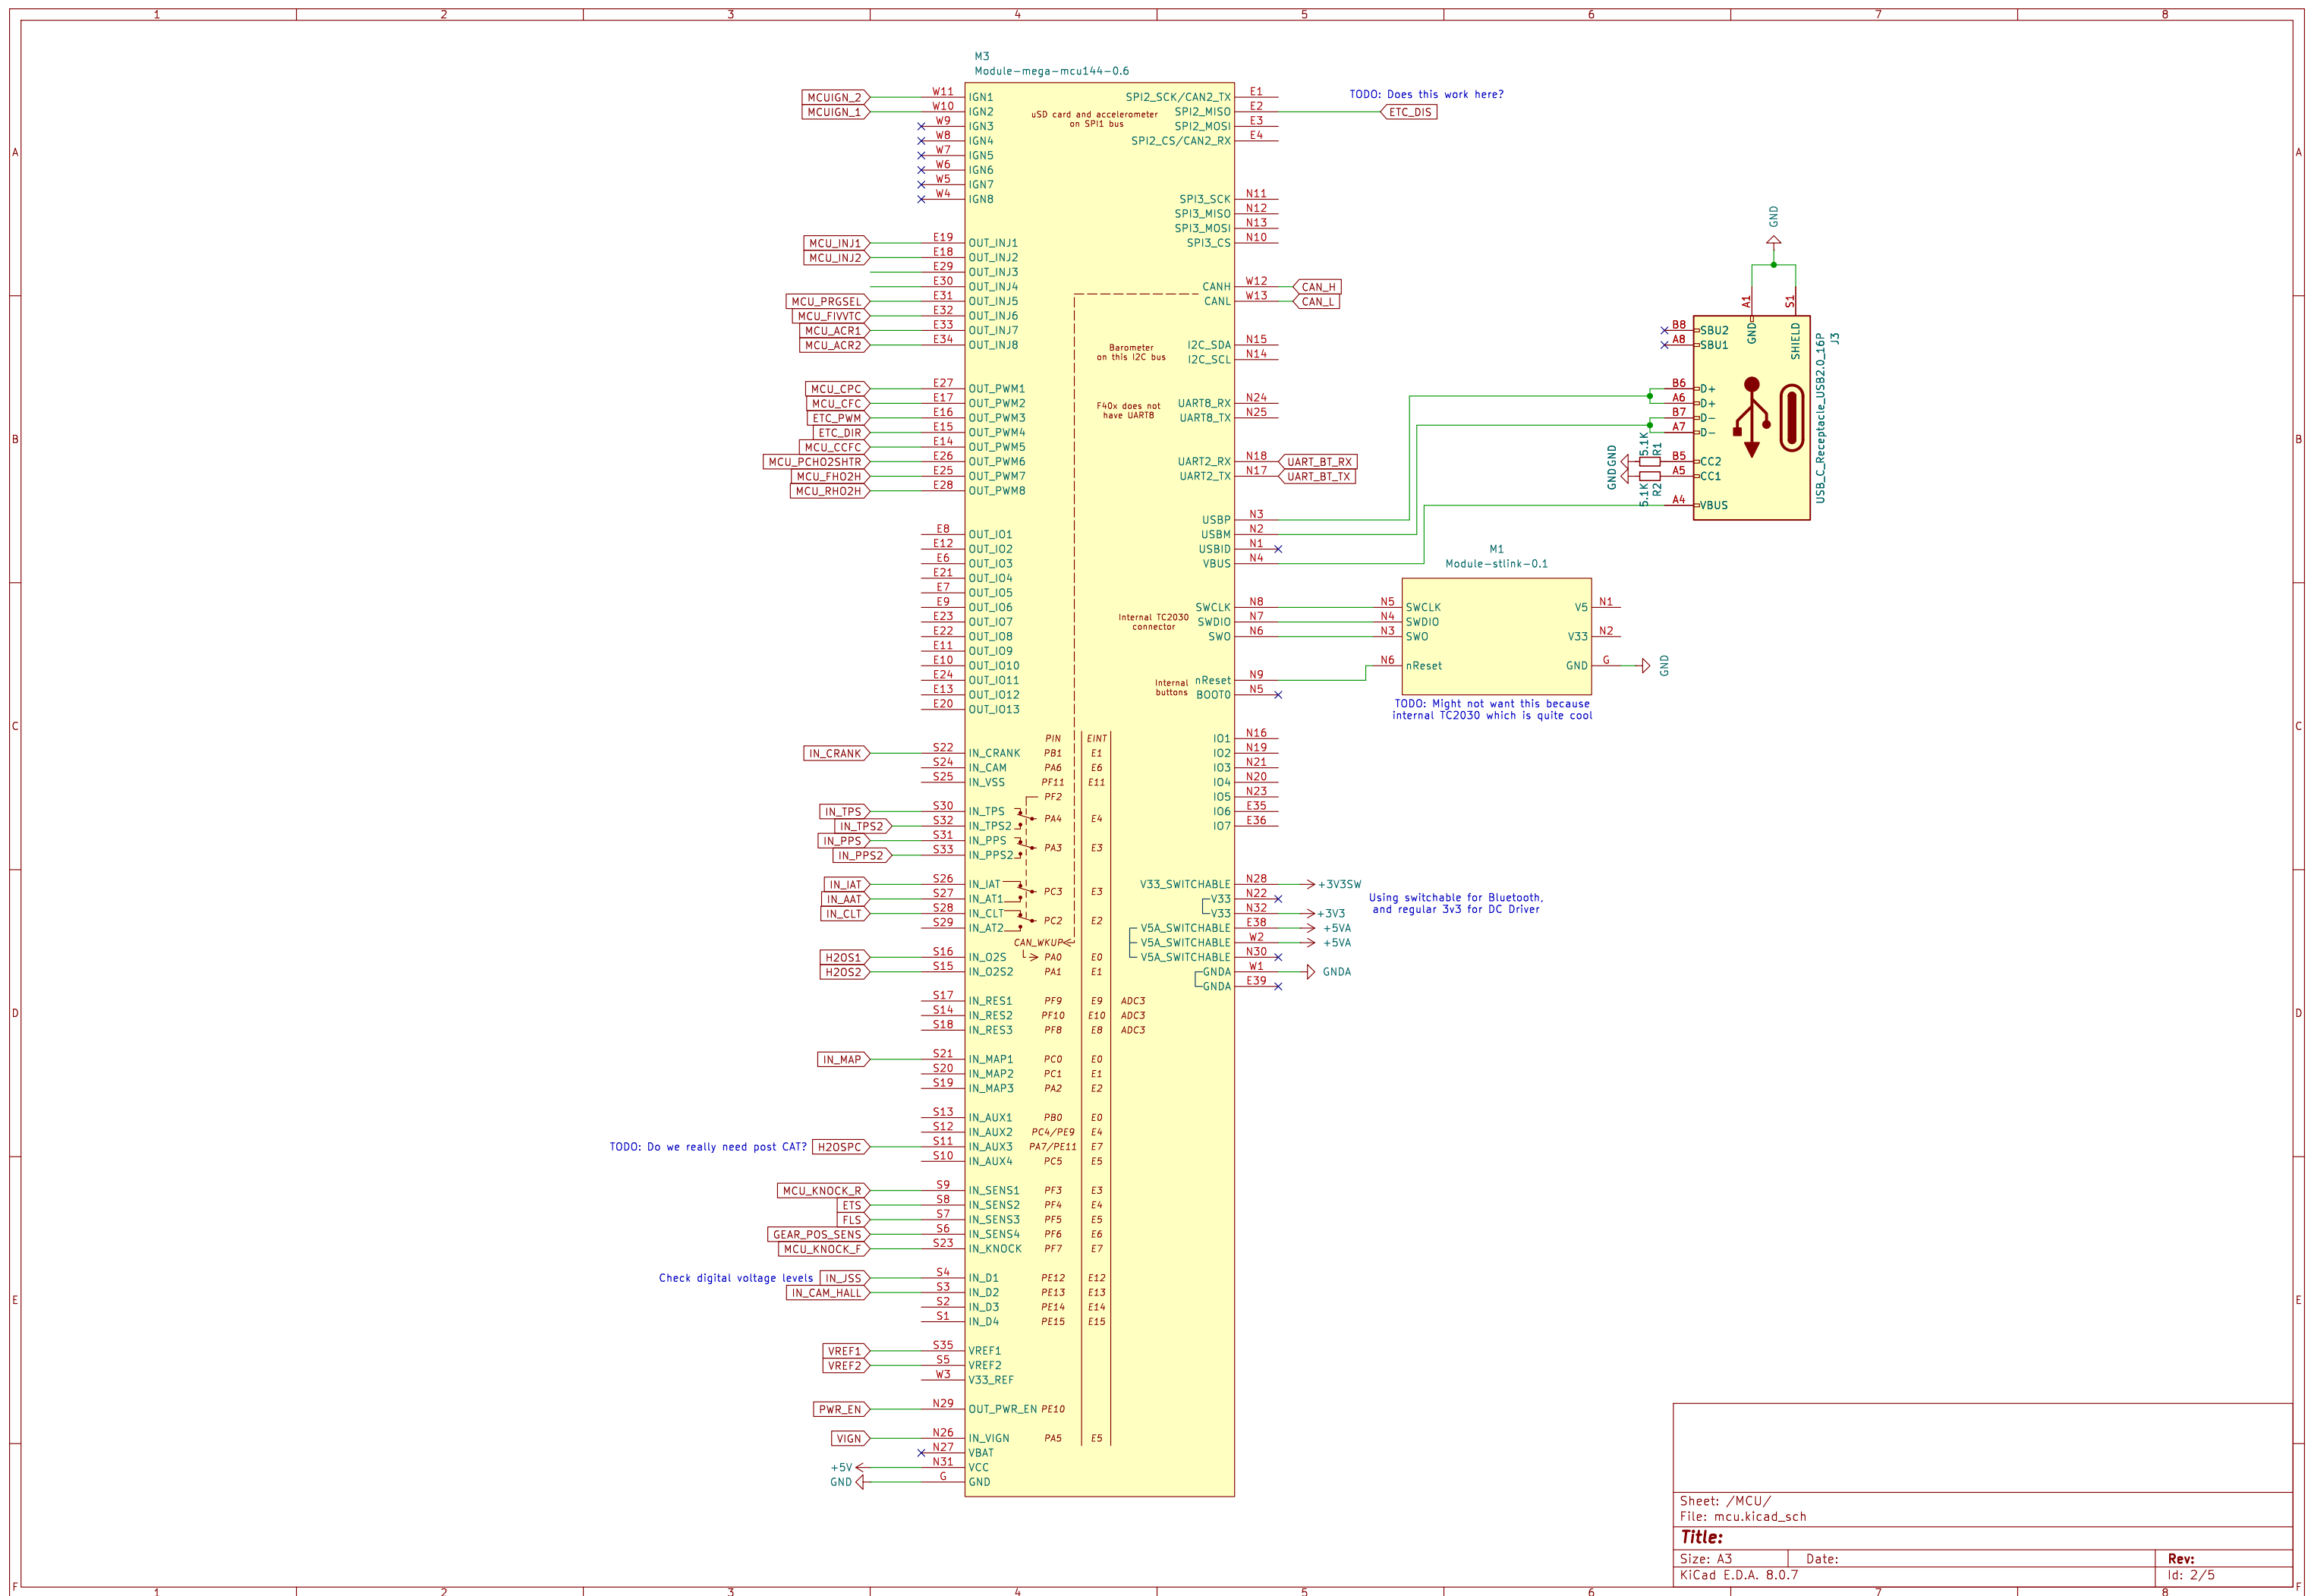

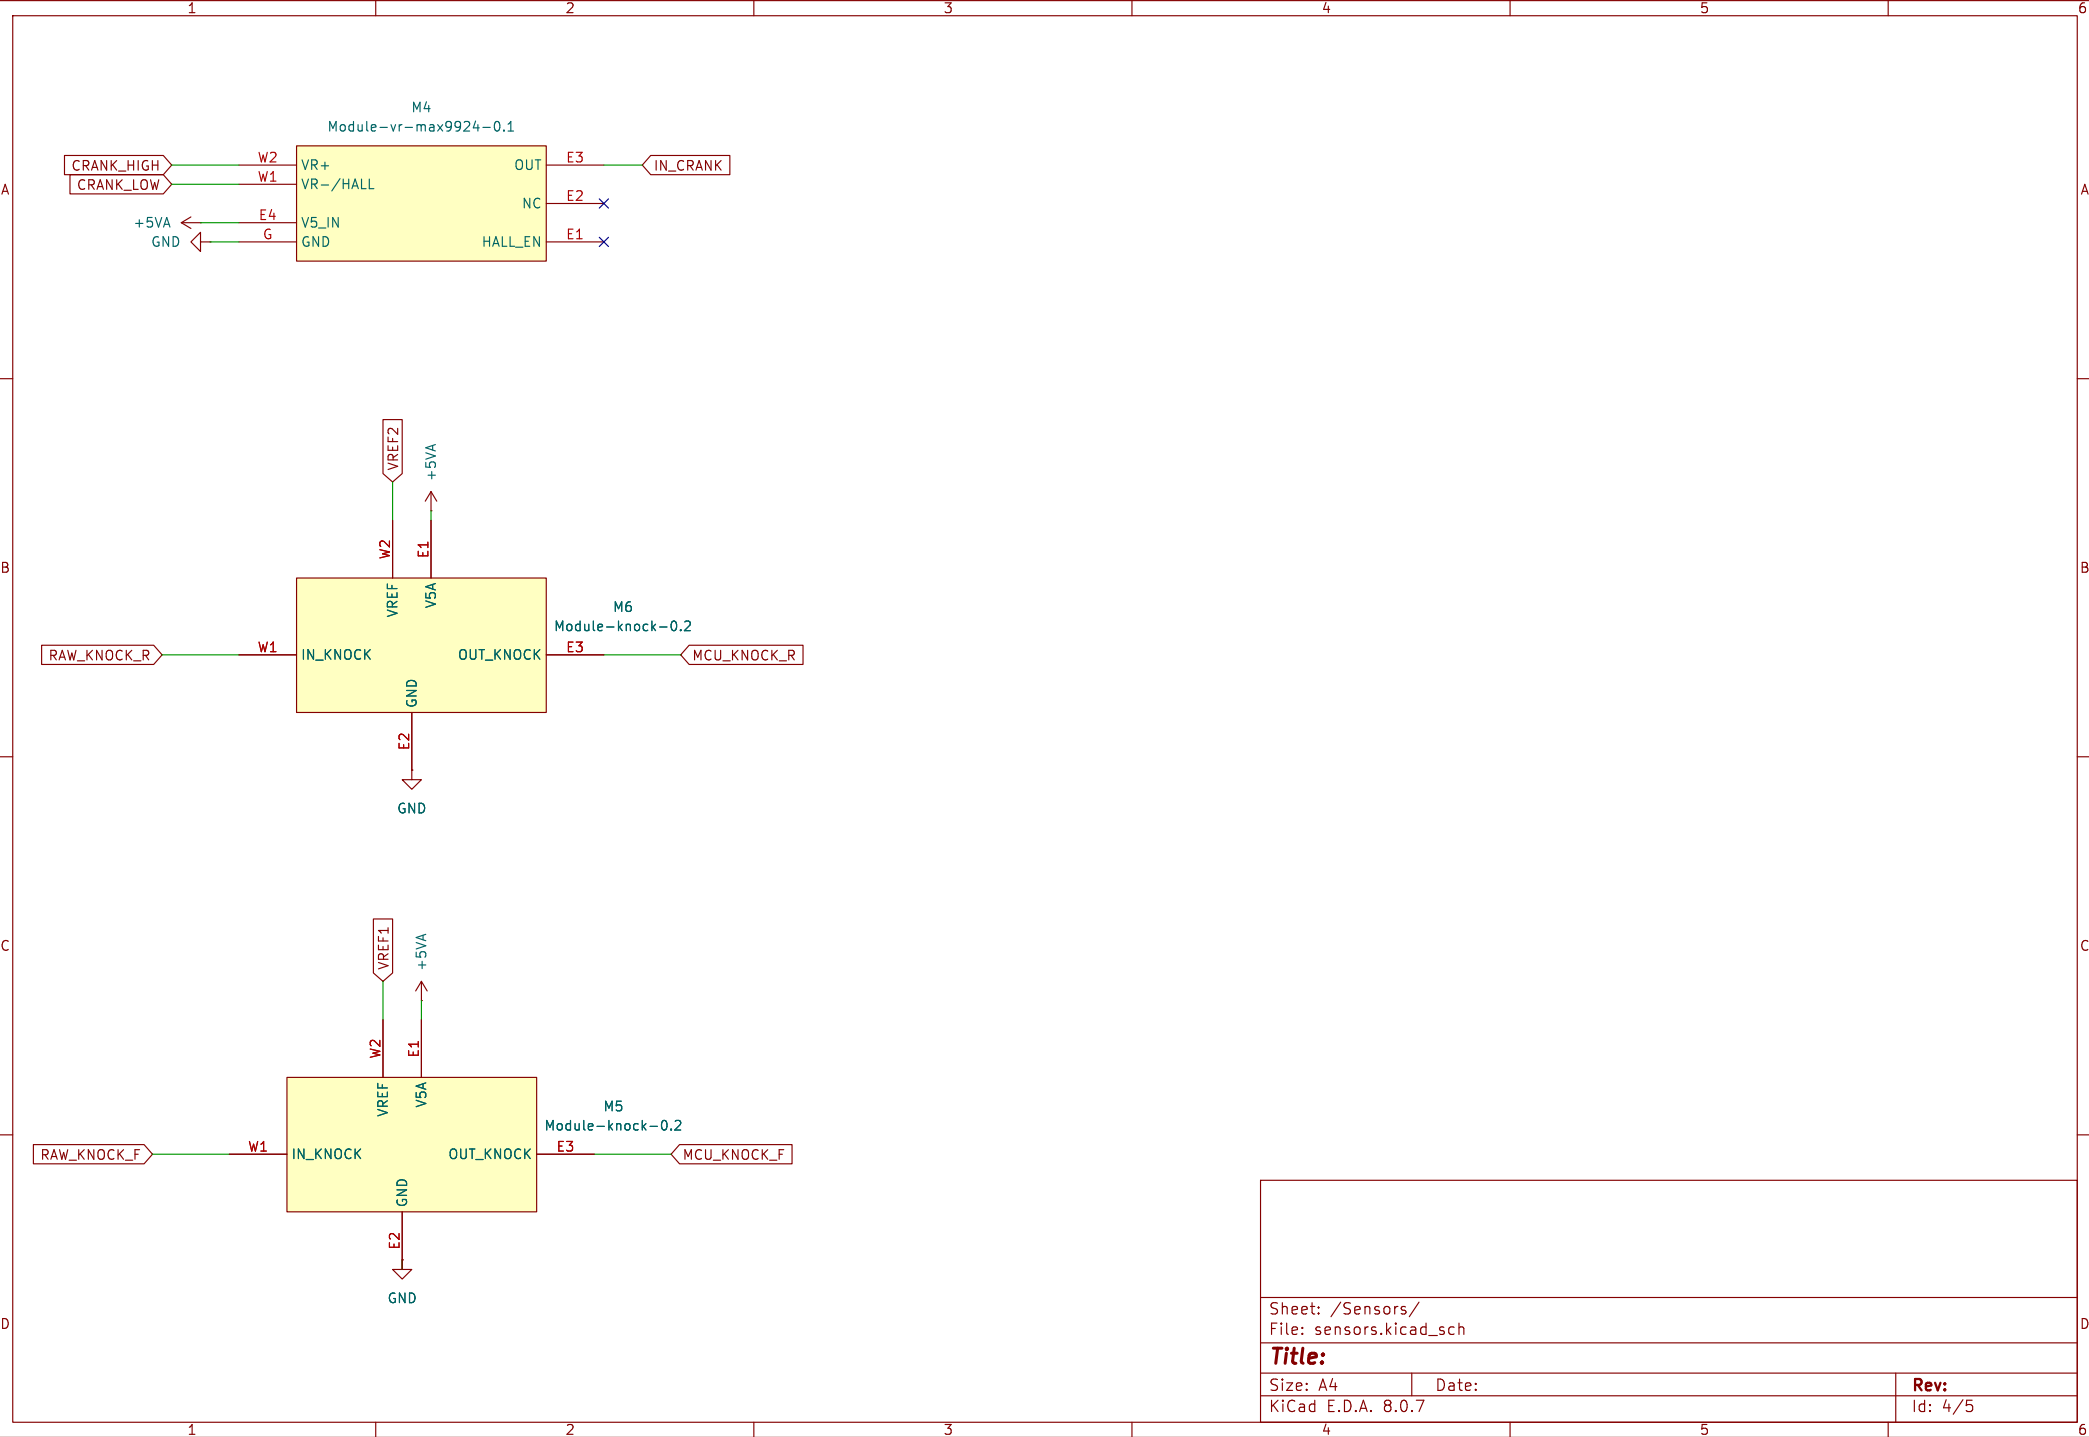

Sheet: /Sensors/ File: sensors.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.7	Id: 4/5	

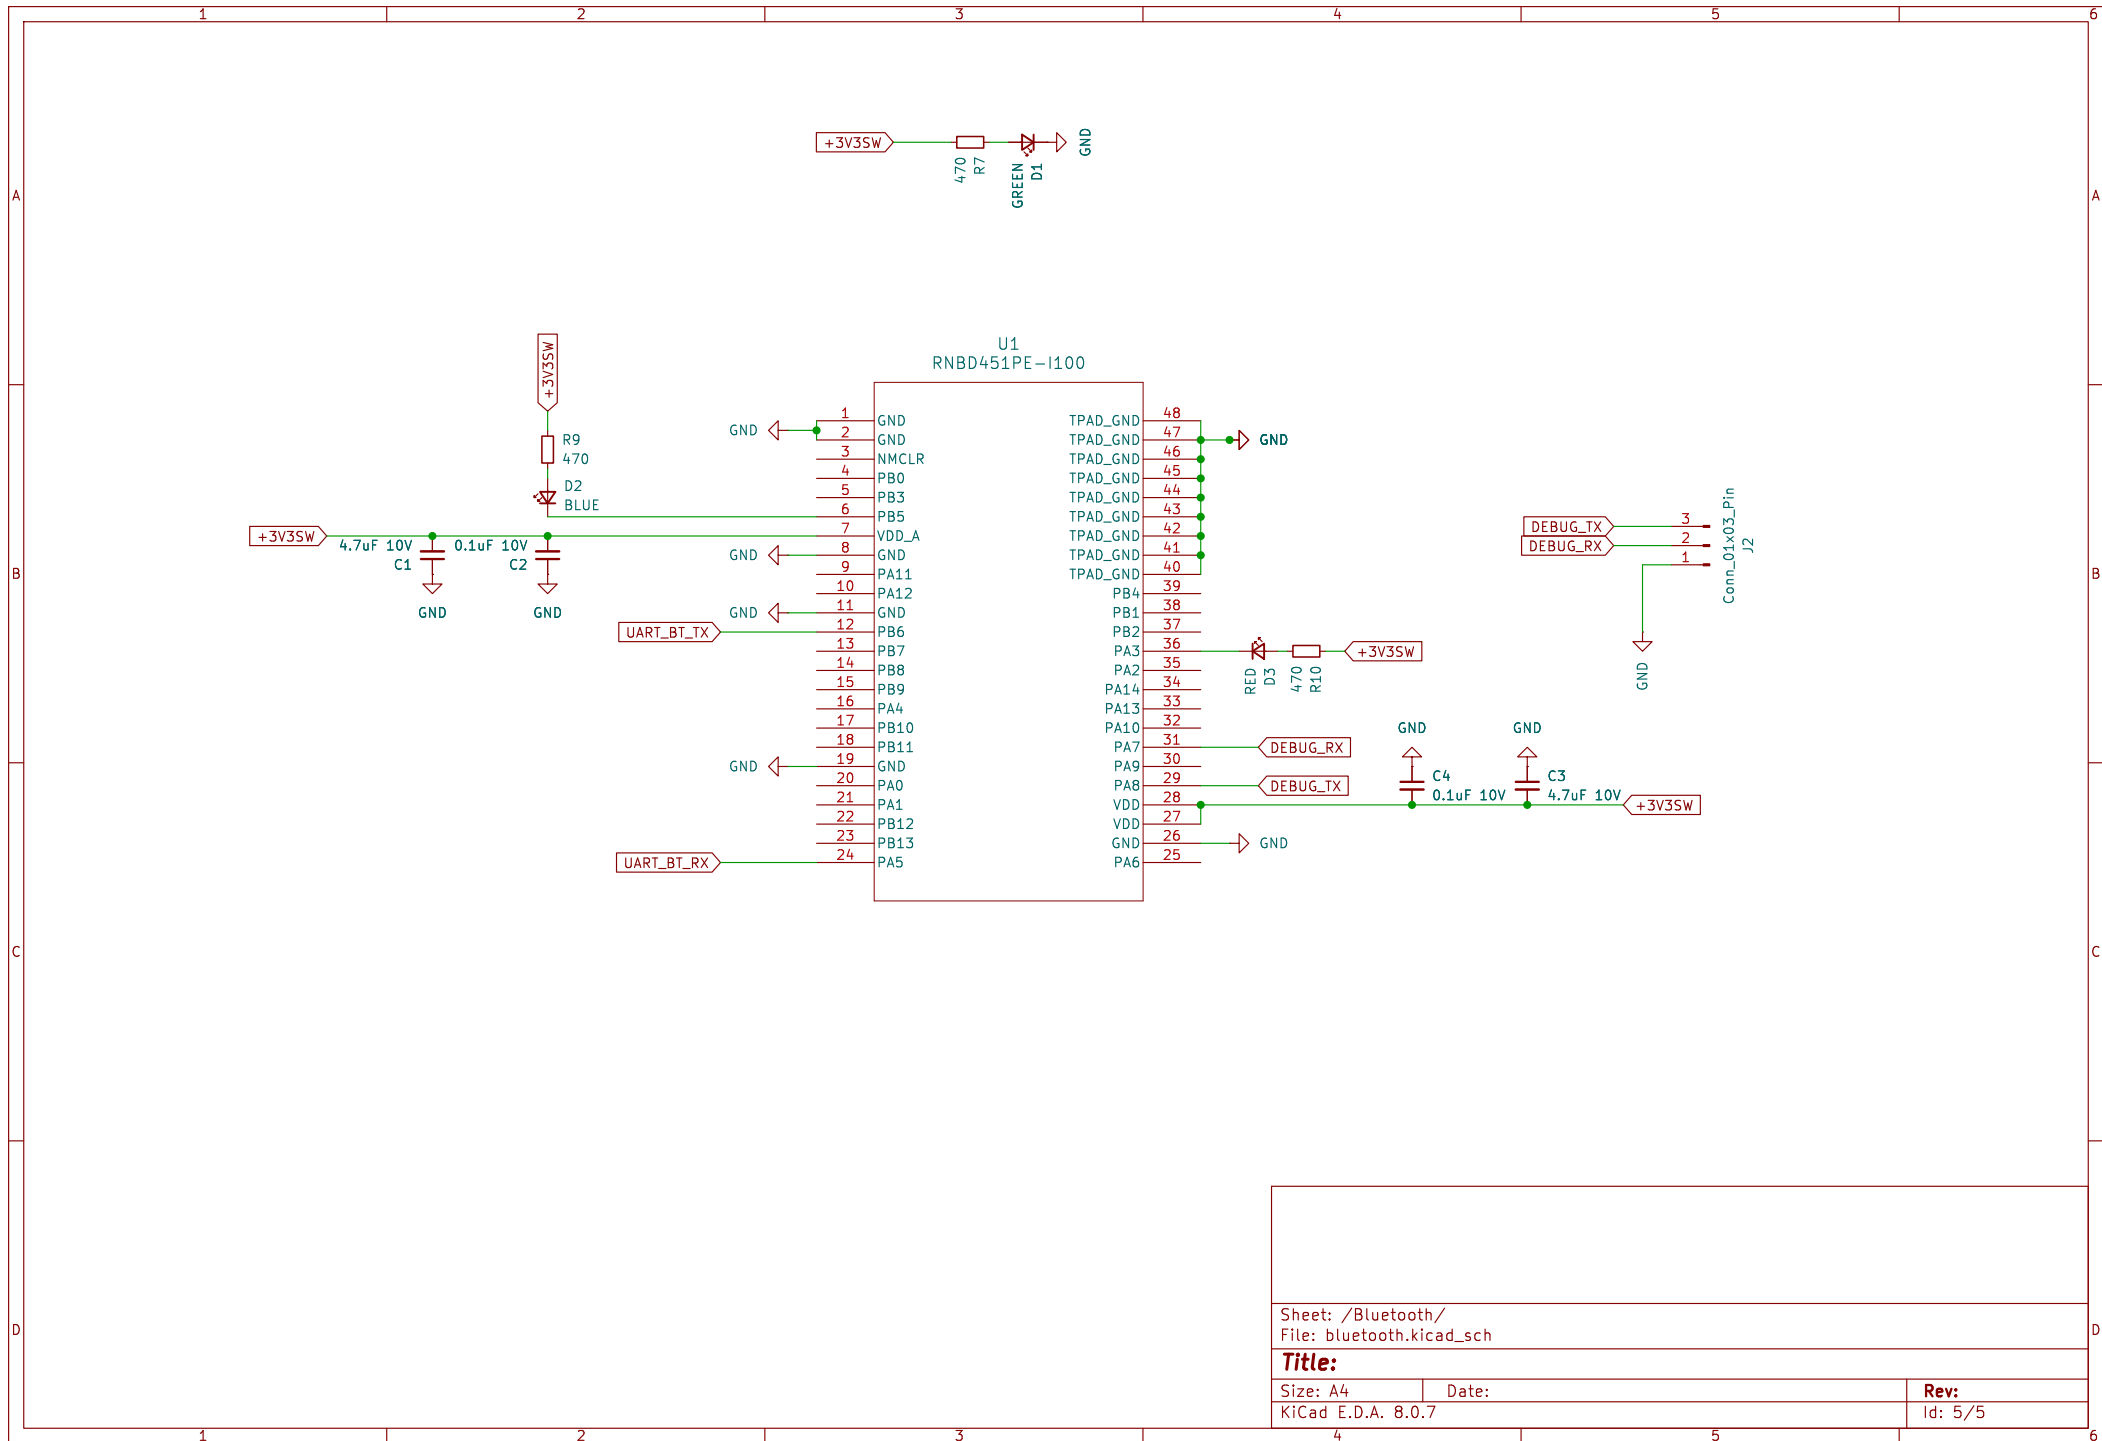

Sheet: /Bluetooth/
File: bluetooth.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.7

Rev:


Id: 5/5

INJECTORS




INJECTORS MEASURED TO TAKE MAX 1A EACH WHEN OPEN
VNLD5160TR-E should be fine
HARLEY uses 2N06L35

ACR

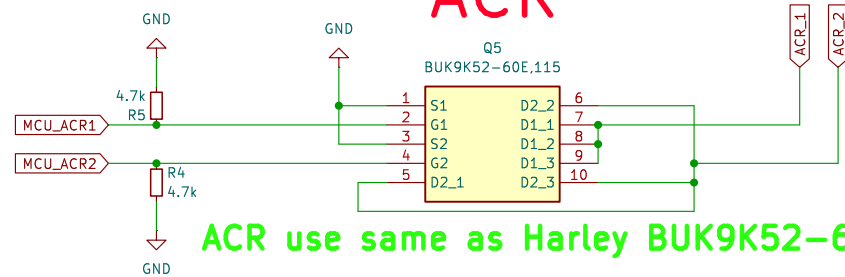


ACR use same as Harley BUK9K52-60E

IGNITION

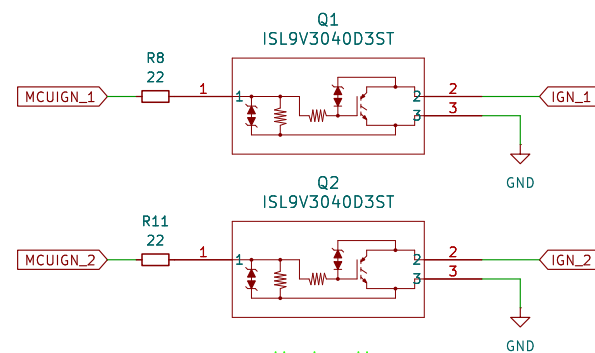


Harley Uses:
<https://www.mouser.de/ProductDetail/onsemi/FGB3040G2-F085C?qs=2WXlatMagChzMRj1hscbYQ%3D%3D>
ISL9V3040D3ST should work though

Electronic Throttle

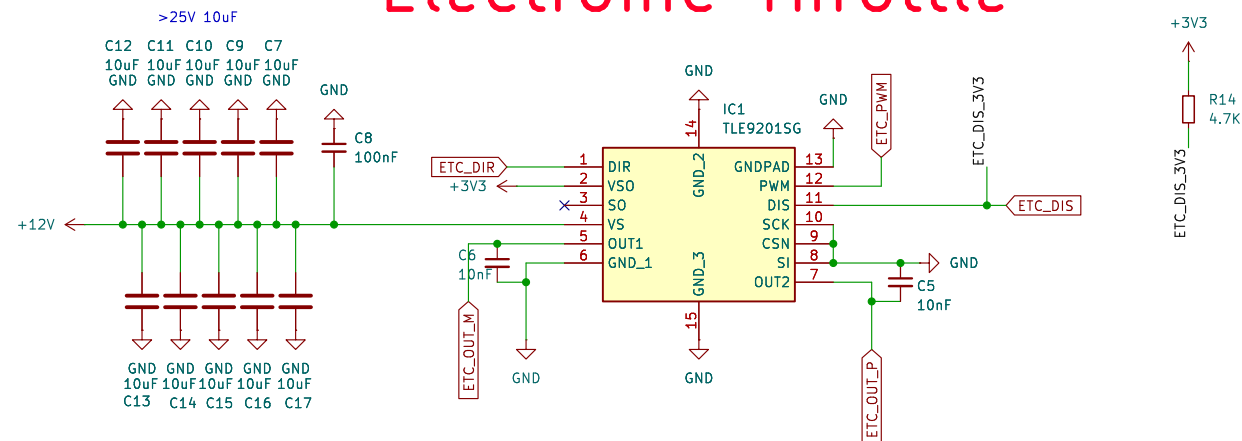


PURGE & VVT SOLENOIDS

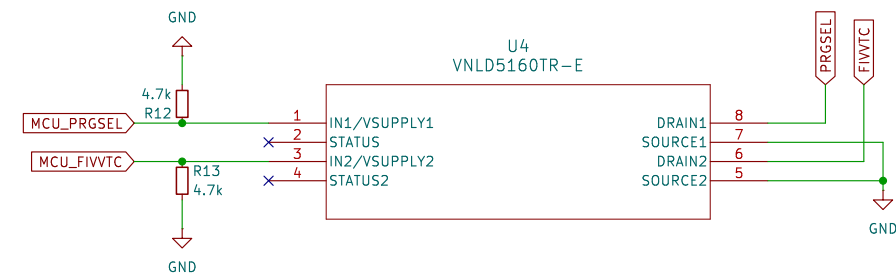

TODO: PURGE AND VVT SOLENOIDS NOT MEASURED YET AT ALL

COOLANT FAN & PUMP

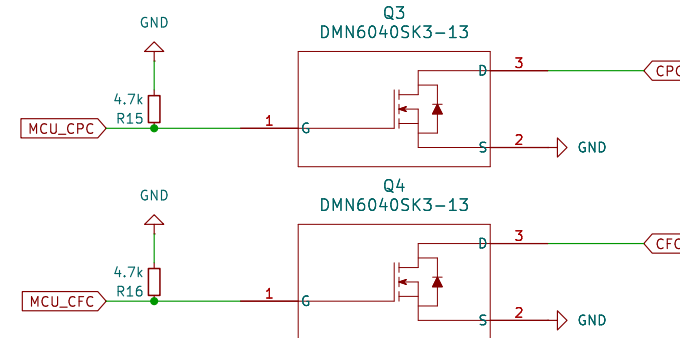

COOLANT FAN PULLS AROUND 4A WHEN CONSTANT 100%,
INITIALLY PULLING UP TO 8A FOR GETTING SPINNING
HARLEY USES: HUF76429D3

POSSIBLE: <https://www.digikey.de/de/products/detail/onsemi/HUF76629D3ST/4553106>

AND: <https://www.digikey.de/de/products/detail/diodes-incorporated/DMN6040SK3-13/8545933>


Weytronik: <https://www.digikey.de/de/products/detail/vishay-siliconix/SISS54DN-T1-GE3/14004251?s=N4IgtCBcDaiMoEk5wKwBYAiA5EBdAvka>

H2OS Heaters are PWM Controlled and max out at about 0.9 Amps
at room temperature, then reducing with heat coming.

VNLD5160TR-E should work. Will test

HD uses <https://www.vishay.com/docs/71506/sq4946aey.pdf>


H2OS Heaters

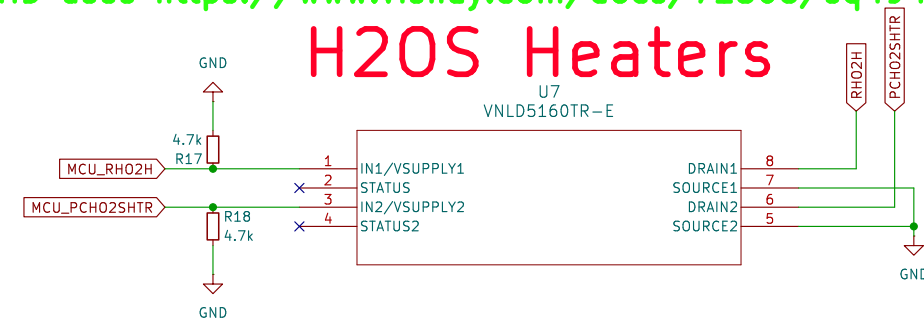

CCFC: Harley uses 2N06L35

TODO: Does this part really make sense?

CCFC & HO2HTR

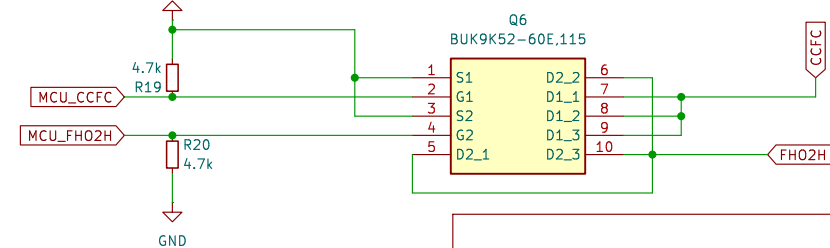

Sheet: /Outputs/
File: outputs.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 8.0.7

Id: 6/5