LR-USB USB Communication Sample Program (Linux C)

PATLITE

Description

LR-	USB USB	Communication Sample Program (Linux C)	1
1.	Overview	w	3
1	.1. Syst	tem Overview	3
2.	Develop	ment environment	3
2	.1. Linu	ux Requirements	3
	2.1.1.	Building an Environment	
3.	Sample S	Source Overview	5
3	.1. Con	nmand Operation	5
	3.1.1.	Command List	5
	3.1.2.	LED Unit Control	
	3.1.3.	Control Several LED Units	6
	3.1.4.	Alarm Controlled by Alarm Pattern	6
	3.1.5.	Alarm Control by Alarm Pattern and Scale	6
	3.1.6.	Reset	7

1. Overview


This is an outline of sample programming to control LR-USB via USB communication.

The programs are intended to control the unit using Linux C without the use of DLLs provided by PATLITE.

1.1. System Overview

The system configuration diagram of this program is as follows.

The sample program controls one LR-USB by USB communication.

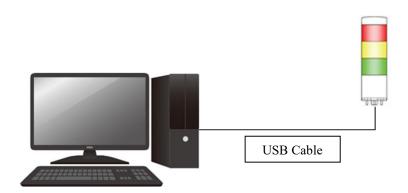

2. Development environment

The development environment of the sample program is shown below.

2.1. Linux Requirements

Development Environment		Remarks
Development	Ubuntu	18.04
os		
Development	C language	
Language		
App Type	CUI application	
Development	gcc	7.5.0
Tools		
Library	Libusb	1.0.21-2

2.1.1. Building an Environment

· Installing libusb



It is installed as a standard-package in Ubunut (18.04). If, for some reason, it is not installed, install it with apt-get command.

\$ sudo apt-get update \$ sudo apt-get install libusb-1.0.0

• Compiling Sample Programs

Use Makefile in the project folder of the sample program to perform compilation with Make command. If compilation is successful, a sample is created.

\$ make

Gcc main.c -o sample `pkg-config libusb-1.0 --libs`


\$ ls

\$ Makefile main.c sample

3. Sample Source Overview

3.1. Command Operation

Open Command Prompt to execute commands for individual actions by specifying command line arguments.

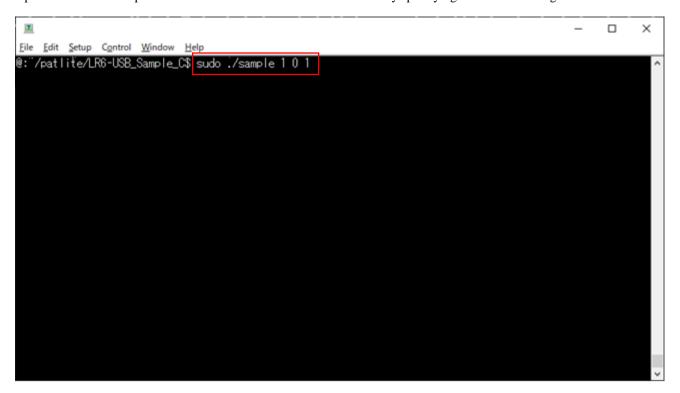

3.1.1. Command List

Command Name	Description
Controls LED Unit	Set LED color and LED pattern to display and activate it.
Controls Several LED Units	Set multiple LED colors and LED patterns to display and activate them.
Alarm Controlled by Alarm Pattern	Set alarm pattern and activate it.
Alarm Controlled by Alarm Pattern and	Set alarm scale and pattern and activate it.
Scale	
Reset	Turn off all LED units and stop the alarm.

3.1.2. LED Unit Control

Execute command with the following command line arguments

No.	Command Line Argument	Value
1	Command ID	1
2	LED Unit Color	Red: 0
		Amber: 1
		Green: 2
		Blue: 3
		White: 4

PATLITE

3	LED Pattern	Off: 0
		Continuous On: 1
		LED Pattern1: 2
		LED Pattern2: 3
		LED Pattern3: 4
		LED Pattern4: 5
		No change: 15

Example: sudo. /sample 1 0 1

3.1.3. Control Several LED Units

Execute command with the following command line arguments

No.	Command Line Argument	Value
1	Command ID	2
2	Red LED Pattern	Off: 0
3	Amber LED Pattern	Continuous On: 1
4	Green LED Pattern	LED Pattern1: 2
5	Blue LED Pattern	LED Pattern2: 3
6	White LED Pattern	LED Pattern3: 4
		LED Pattern4: 5
		No change: 15

Example: sudo. /sample 2 1 2 3 4 5

3.1.4. Alarm Controlled by Alarm Pattern

Execute command with the following command line arguments

No.	Command Line Argument	Value
1	Command ID	3
2	Alarm Pattern	Stop: 0
		Sounding (Continuous): 1
		Alarm Pattern 1: 2
		Alarm r Pattern 2: 3
		Alarm r Pattern 3: 4
		Alarm Pattern 4: 5
		No change: 15
3	Alarm Continuous Operation and	Continuous operation: 0
	Number of Cycles	Number of cycles: 1 to 15

Example: sudo. /sample 3 1 15

3.1.5. Alarm Control by Alarm Pattern and Scale

Execute command with the following command line arguments

PATLITE

No.	Command Line Argument	Value
1	Command ID	4
2	Alarm Pattern	Stop: 0
		Sounding (Continuous): 1
		Alarm Pattern 1: 2
		Alarm r Pattern 2: 3
		Alarm r Pattern 3: 4
		Alarm Pattern 4: 5
		No change: 15
3	Alarm Continuous Operation and	Continuous operation: 0
	Number of Cycles	Number of cycles: 1 to 15
4	Sound A Alarm Scale	Stop: 0
5	Sound B Alarm Scale	A6: 1
		B b 6: 2
		B6: 3
		C7: 4
		D b 7: 5
		D7: 6
		E b 7: 7
		E7: 8
		F7: 9
		G ♭ 7: 10
		G7: 11
		A b 7: 12
		A7: 13
		Default value of sound A: D7: 14
		Default value of sound B: (Stop): 15

Example: sudo. /sample 4 1 15 1 13

3.1.6. Reset

Execute command with the following command line arguments

No.	Command Line Argument	Value
1	Command ID	5

Example: sudo. /sample 5