

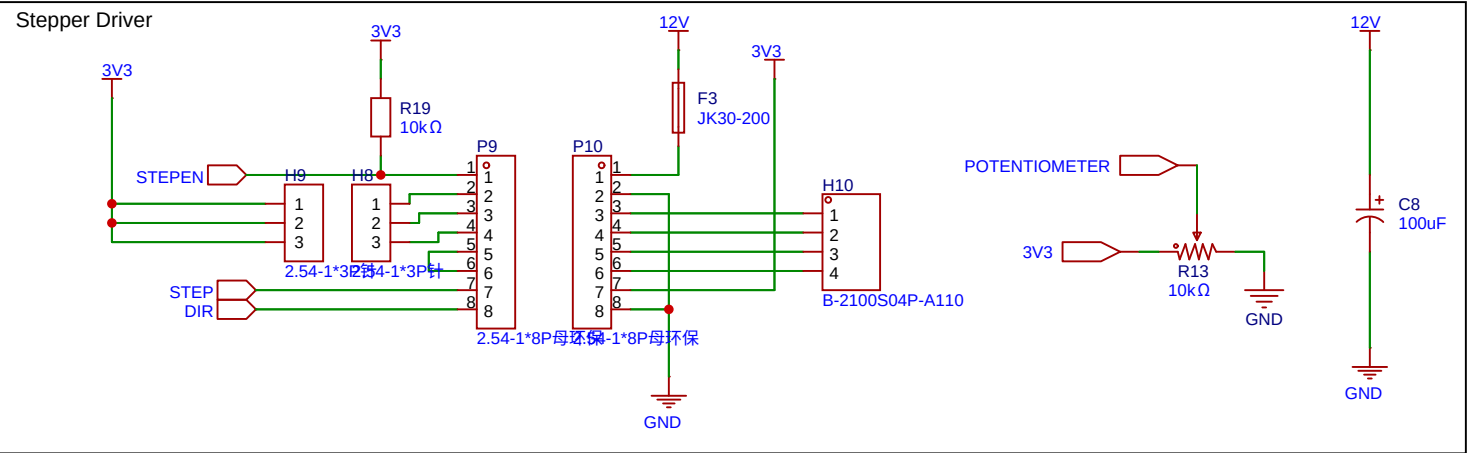
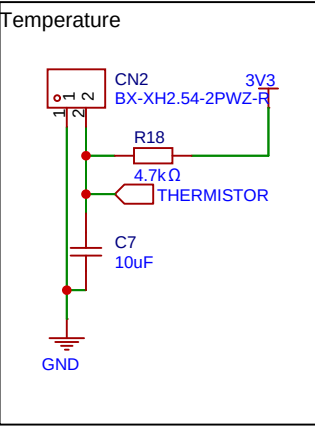
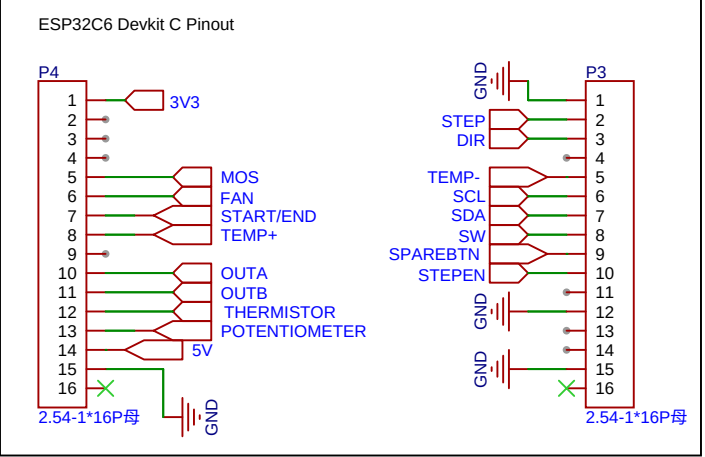
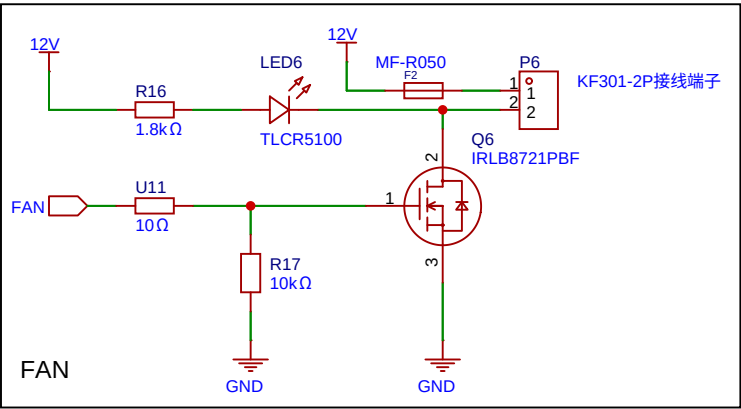
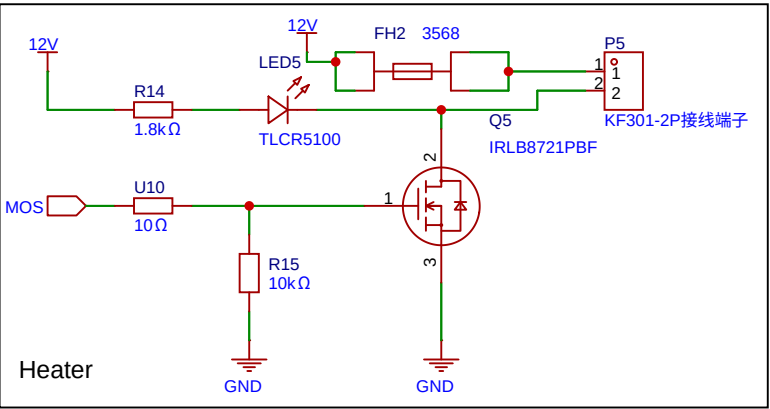
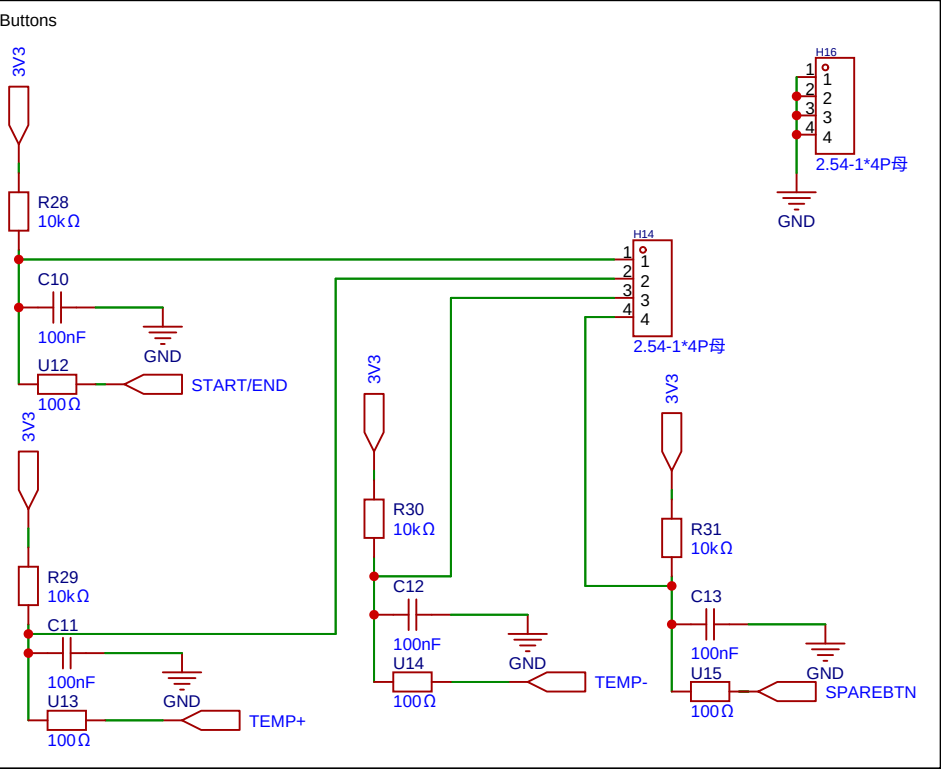
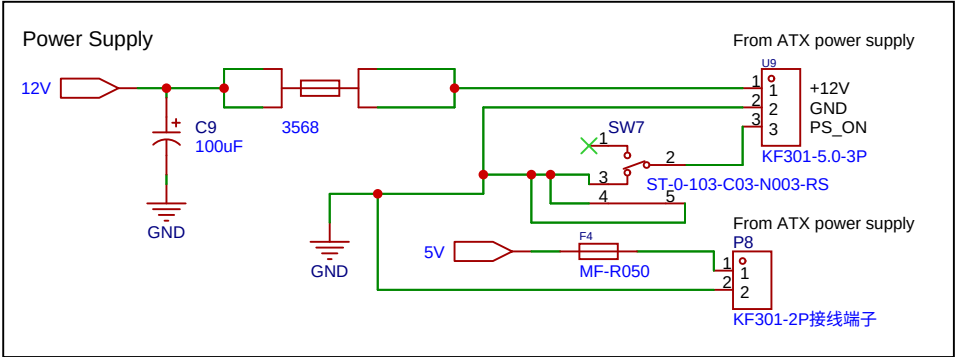


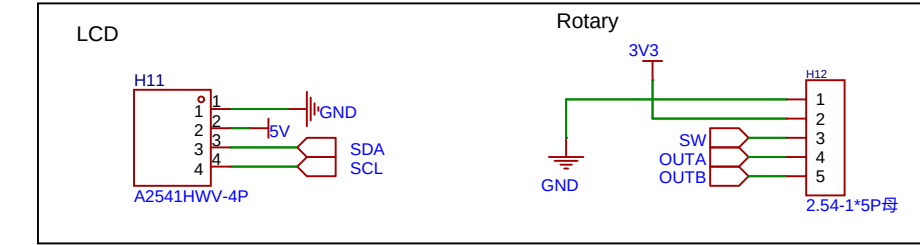

ESP32-C6-DevKitC-1

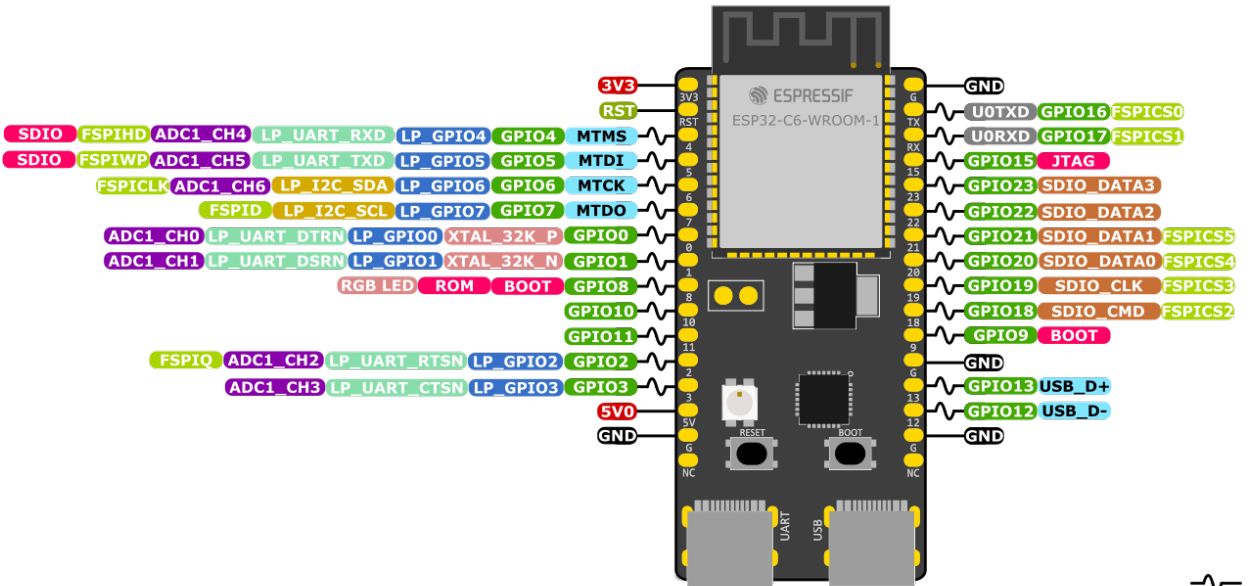

ESP32-C6 Specs

32-bit RISC-V single-core @160MHz
Wi-Fi IEEE 802.11 ax 2.4GHz + Bluetooth LE 5
+ IEEE 802.15.4 (Zigbee and Thread)
512 KB SRAM (21 KB for cache)
320 KB ROM
30 or 22 GPIOs, 3x SPI, 2x UART, 1x I2C, RMT
LED PWM 6ch, 1x 12-bit ADC with 7ch, TWAI®
USB Serial/JTAG, ETM, MCPWM, SDIO Slave

