



Electromagnetic Fields

Detailed Solutions

GATE INSTRUMENTATION ENGINEERING

PrepFusionTM

Previous Year Questions Solutions

Contents

1.	Electrostatics	1
2.	Magnetostatics	6



SOLUTIONS



Electrostatics

Topics

1. Coulomb's Law and Superposition Principle
2. Electric Field, Electric Field Intensity calculation in various Configurations: Due to Point, Line, Plane and Spherical Charge Distributions
3. Equipotential Surfaces and Electric Dipoles
4. Electric Flux Density and Gauss's Law
5. Divergence and Electric Potential
6. Electric Field Effect of Dielectric Medium- a)Boundary conditions b)method of image charges
7. Capacitance of Simple Configurations

PrepFusion

Q1.26.1

MCQ

2026

1M

Ans: MTA

☒ ☐ ☐

The electric field vector points in the direction of the maximum decrease of the electric potential function. The electric field intensity is related to the potential by $\vec{E} = -\nabla V$:

$$\vec{E} = -\nabla V = -\left(\frac{\partial V}{\partial x}\hat{x} + \frac{\partial V}{\partial y}\hat{y} + \frac{\partial V}{\partial z}\hat{z}\right)$$

$$\vec{E} = -\left(\frac{x}{\sqrt{x^2 + y^2 + z^2}}\hat{x} + \frac{y}{\sqrt{x^2 + y^2 + z^2}}\hat{y} + \frac{z}{\sqrt{x^2 + y^2 + z^2}}\hat{z}\right)$$

At $(\hat{i}, \hat{j}, \hat{k})$ i.e., At $(1, 1, 1)$:

$$\vec{E} = -\frac{1}{\sqrt{3}}\hat{x} - \frac{1}{\sqrt{3}}\hat{y} - \frac{1}{\sqrt{3}}\hat{z}$$

$$\vec{F} = q\vec{E} = -\frac{1}{\sqrt{3}}\hat{x} - \frac{1}{\sqrt{3}}\hat{y} - \frac{1}{\sqrt{3}}\hat{z}$$

Comparing with $\vec{F} = a\hat{i} + b\hat{j} + c\hat{k}$:

$$a = -\frac{1}{\sqrt{3}}, \quad b = -\frac{1}{\sqrt{3}}, \quad c = -\frac{1}{\sqrt{3}}$$

MTA

Q1.26.2

MCQ

2026

2M

Ans: A

☒ ☐ ☐

From Maxwell's first equation(Gauss's Law in differential form dictates that the divergence of the electric flux density field equals the volume charge density.):

$$\nabla \cdot \vec{D} = \rho_v \implies \rho_v = \epsilon_o \nabla \cdot \vec{E}$$

Given the electric field vector components:

$$\nabla \cdot \vec{E} = \frac{\partial}{\partial x}(2x + 5y + 6z) + \frac{\partial}{\partial y}(5x + 4y + 10z) + \frac{\partial}{\partial z}(6x + 10y + 2z)$$

$$\nabla \cdot \vec{E} = 2 + 4 + 2 = 8$$

$$\rho_v = \epsilon_o(8) = 8\epsilon_o$$

A) $8\epsilon_o$
Q1.25.1

MCQ

2025

1M

Ans: A

☒ ☐ ☐

The electric flux density $\vec{D}$ due to an infinite sheet of charge is independent of the distance from the sheet and depends solely on the surface charge density.

Given surface charge density $\rho_s = 10 \text{ C/m}^2$.

$$\vec{E} = \frac{\rho_s}{2\epsilon}$$

$$\vec{E} = \frac{\rho_s}{2\epsilon}\hat{c}$$

$$\epsilon\vec{E} = \frac{\rho_s}{2}\hat{c}$$

$$\vec{D} = \frac{10}{2}\hat{c}$$

$$\vec{D} = 5\hat{c}$$

A) $5\hat{c}$

Q1.25.2 NAT 2025 2M Ans: 4.00 to 4.40 ☒ ☐ ☐

Electrostatic force between the plates is given by:

$$F_e = \frac{Q^2}{2\epsilon A}$$

At Equilibrium, the mechanical spring restoring force balances the electrostatic attraction force. The restoring spring force is $F_s = kx$. At equilibrium position:

$$F_s = F_e \implies kx = \frac{Q^2}{2\epsilon A}$$

$$Q^2 = 2\epsilon Akx \implies Q = \sqrt{2\epsilon Akx}$$

Substituting the given parameters:

$$Q = \sqrt{2 \times 8.854 \times 10^{-12} \times (100 \times 10^{-6})^2 \times 0.01 \times 10^{-6}}$$

$$Q = \sqrt{2 \times 8.854 \times 10^{-30}}$$

$$Q = \sqrt{1.7708 \times 10^{-29}} = 4.208 \times 10^{-14} \text{ C}$$

4.20

Q1.24.1 MCQ 2024 1M Ans: A ☒ ☐ ☐

The capacitance of a spherical shell arrangement depends on the geometric radii of the concentric spheres and the permittivity of the dielectric medium. The capacitance of a spherical capacitor with inner radius a and outer radius b is given by:

$$C = \frac{4\pi\epsilon}{\left[\frac{1}{a} - \frac{1}{b}\right]} = \frac{4\pi\epsilon ab}{(b-a)}$$

Given $a = x$ and $b = y$:

$$C = \left[\frac{4\pi\epsilon xy}{y-x} \right]$$

A) $\frac{4\pi\epsilon xy}{y-x}$

Q1.24.2 MCQ 2024 2M Ans: B ☒ ☐ ☐

Given total current $I = \iint \vec{J} \cdot d\vec{A} = \iint k s^2 \rho d\rho d\phi$ where $(s = \rho)$ represents the radial distance:

$$I = \iiint k \cdot \rho^2 \cdot \rho d\rho d\phi = k \int \rho^3 d\rho \int d\phi$$

$$= k \left[\frac{\rho^4}{4} \right]_0^a [\phi]_0^{2\pi}$$

$$= \frac{k}{4} [a^4 - 0] [2\pi]$$

$$I = \frac{\pi k a^4}{2}$$

B) $\frac{\pi k a^4}{2}$

Q1.22.1 NAT 2022 2M Ans: 33.3 ☒ ☐ ☐

Given: $\epsilon_o = 8.854 \times 10^{-12}$, $a = 20$ cm, $b = 25$ cm.
The capacitance C of a spherical capacitor is:

$$C = \frac{4\pi\epsilon_o}{\left[\frac{1}{a} - \frac{1}{b}\right]} = \frac{4\pi\epsilon_o ab}{b - a}$$

$$C = \frac{4\pi \times \frac{1}{36\pi \times 10^9} \times 15 \times 10 \times 10^{-4}}{5 \times 10^{-2}}$$

$$C = \frac{1}{9 \times 10^9} \times 30 \times 10^{-2}$$

$$C = \frac{1}{3} \times 10^{-1} \times 10^{-9} = \frac{1}{3} \times 10^{-10}$$

$$C = 33.3 \text{ pF}$$

33.3

Key Points

- The capacitance of concentric spherical conductors depends only on permittivity and geometric boundaries.
- Free space permittivity can be approximated as $\epsilon_o \approx \frac{1}{36\pi \times 10^9} \text{ F/m}$.

Q1.21.1 MCQ 2021 1M Ans: B ☒ ☐ ☐

If an infinite line lies along the Z-axis, carrying a uniform charge density ρ_l C/m, then the electric field intensity in the cylindrical coordinate system (r, ϕ, z) is given by:

$$\vec{E} = \frac{\rho_l}{2\pi\epsilon r} \hat{a}_r \quad \text{or} \quad \frac{\rho_l}{2\pi\epsilon r} \hat{r} \text{ V/m}$$

Therefore, the electric field intensity will be along the $\hat{r}$ direction only. The direction of the field is always radially outwards from the line charge.

B) $\hat{r}$

DEBUG INFO

Chapter I

Electrostatics

Total Questions : 8

MCQ : 6

MSQ : 0

NAT : 2



PrepFusion

SOLUTIONS



Magnetostatics

Topics

1. Biot-Savart's Law
2. Electromagnetic Induction and Faraday's Law
3. Magnetic Field of a current carrying loop
4. Ampere's Law and Curl
5. Lorentz Force
6. Inductance and Magnetomotive Force
7. Self and Mutual Inductance of Simple Configurations
8. Reluctance and Magnetic Circuits
9. Magnetic Flux and Boundary Conditions for magnetic field

PrepFusion

Q2.26.1
MCQ
2026
2M
Ans: C


The differential force equation yields:

$$\vec{F} = Id\vec{\ell} \left(\frac{1}{\sqrt{6}}\hat{x} + \frac{2}{\sqrt{6}}\hat{y} + \frac{1}{\sqrt{6}}\hat{z} \right) \times (2\hat{x} + 2\hat{z})$$

Evaluating the cross product using determinants:

$$\begin{aligned} &= \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \frac{1}{\sqrt{6}} & \frac{2}{\sqrt{6}} & \frac{1}{\sqrt{6}} \\ 2 & 0 & 2 \end{vmatrix} \\ &= \hat{x} \left(\frac{4}{\sqrt{6}} - 0 \right) - \hat{y} \left(\frac{2}{\sqrt{6}} - \frac{2}{\sqrt{6}} \right) + \hat{z} \left(0 - \frac{4}{\sqrt{6}} \right) \\ &= \frac{4}{\sqrt{6}}\hat{x} - \frac{4}{\sqrt{6}}\hat{z} \\ \vec{F} &= d\vec{\ell} \left(\frac{4}{\sqrt{6}}\hat{x} - \frac{4}{\sqrt{6}}\hat{z} \right) \\ \frac{\vec{F}}{d\vec{\ell}} &= \left(\frac{4}{\sqrt{6}}\hat{x} - \frac{4}{\sqrt{6}}\hat{z} \right) \\ &\boxed{\text{C) } \frac{4}{\sqrt{6}}\hat{x} - \frac{4}{\sqrt{6}}\hat{z}} \end{aligned}$$

Key Points

- The magnetic force on a differential current element is computed using the vector cross product of the direction vector and the magnetic field vector.

Q2.25.1
MCQ
2025
1M
Ans: A


The magnetic force on a current-carrying conductor is maximized when the conductor is perpendicular to the magnetic field lines.

Given:

$$I = \frac{60}{0.5} = 120 \text{ A}$$

$$F = BIl \sin \theta \quad (\theta = 90^\circ)$$

$$F = BIl = 0.5 \times 1 \times 120 = 60 \text{ N}$$

Using the Right-Hand Rule, the direction is in the positive x-direction.

$$\boxed{\text{A) } 60\text{N in the direction of } \hat{x}}$$

Q2.23.1
NAT
2023
1M
Ans: 5


Magnetic force per unit length between two parallel infinitely long current-carrying conductors, spaced 'd' apart is given by:

$$f = \frac{\mu I_1 I_2}{2\pi d}$$

$$f \propto \frac{1}{d}$$

$$\frac{f_2}{f_1} = \frac{d_1}{d_2} \implies f_2 = \left(\frac{d_1}{d_2} \right) f_1$$

Given: $d_1 = 2 \text{ cm}$ and $f_1 = 10 \mu\text{N/m}$

$$d_2 = 2(d_1) = 2 \times 2 \text{ cm}$$

$$f_2 = \left(\frac{2}{2 \times 2} \right) (10)$$

$$\therefore f_2 = 5 \mu\text{N/m}$$

5

Q2.22.1

NAT

2022

2M

Ans: 200



Given: Radius = 0.1 m , $\omega = 20 \text{ rad/sec}$, $B = 2 \text{ T}$

$$T = \frac{2\pi}{\omega}, \quad V = -\frac{d\psi}{dt}$$

$$\frac{T}{2} = \frac{\pi}{\omega}$$

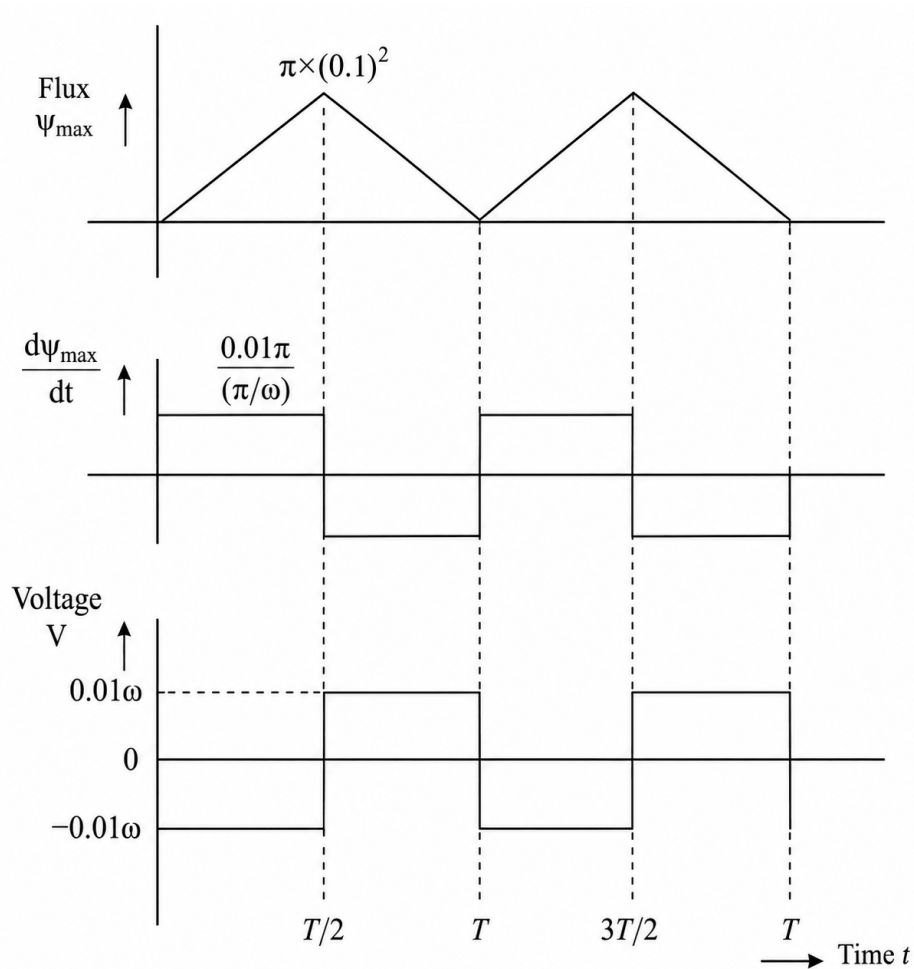


Fig. Solution Q2.22.1

$$V_{p-p} = 0.02\omega = 0.02 \times 20 = 0.4$$

$$I_{p-p} = \frac{0.4}{2} = 0.2 = 200 \times 10^{-3}$$

$$I_{p-p} = 200 \text{ mA}$$

200

Key Points

- Induced voltage is proportional to the time rate of change of magnetic flux linkage.
- Peak-to-peak values can be evaluated directly from the extrema transitions of the derivative waveforms.

Q2.21.1 NAT 2021 2M Ans: 2.7 to 2.9 ●●●

The net force (F) on the bar, which is subject to friction, is equal to the sum of the applied force (Electromagnetic Lorentz Force or F_{appl}) and the frictional force (F_{fr}).

$$F = F_{\text{appl}} - F_{\text{fr}}$$

(The negative sign is due to the frictional force opposing motion)

$$ma = IlB - kmg$$

Where: m : mass of bar 1 kg, I : current, $I = 10$ A, l : length of bar $l = 0.5$ m, $B = 1$ T, k : Coefficient of friction $k = 0.1$, $g = 10$ m/sec²,

$$a = \frac{IlB}{m} - kg = \frac{10 \times 0.5 \times 1}{1} - 0.1 \times 10$$

$$a = 4 \text{ m/sec}^2$$

Acceleration, $a = 4 \text{ m/sec}^2$ From basics of Kinematics:

$$v^2 - u^2 = 2as$$

Where 's' is the distance travelled by the bar, $s = 1$ m. As the bar is initially resting on the surface, its initial velocity $u = 0$.

$$v^2 = 2 \times (4) \times (1)$$

$$\therefore \text{Speed, } v = 2.82 \text{ m/sec}$$

$$\boxed{2.82}$$

Q2.21.2 NAT 2021 2M Ans: 10 ●●○

Given: Toroid is made of CRGO with $\mu_r = 3000$, $\mu_0 = 4\pi \times 10^{-7}$ H/m, $I = 5$ mA, $N = 200$, Inner diameter, $D_1 = 10$ cm Outer diameter, $D_2 = 14$ cm Mean diameter:

$$D = \left(\frac{10 + 14}{2} \right) = 12 \text{ cm}$$

Mean radius, $R = 6$ cm Magnetic flux density in the core is given by:

$$B = \frac{\mu NI}{l}$$

Where l is the mean length of the toroid, $l = 2\pi R$.

$$B = \frac{\mu_0 \mu_r NI}{2\pi R}$$

$$B = \frac{4\pi \times 10^{-7} \times 3000 \times 200 \times 5 \times 10^{-3}}{2\pi \times 6 \times 10^{-2}}$$

$$B = \frac{2 \times 10^{-7} \times 3 \times 10^3 \times 2 \times 10^2 \times 5 \times 10^{-3}}{6 \times 10^{-2}}$$

$$B = 10 \text{ mT}$$

$$\boxed{10}$$

DEBUG INFO

Chapter II

Magnetostatics

Total Questions : 6

MCQ : 2

MSQ : 0

NAT : 4



PrepFusion