



[PFS]
ORION



HELIOS

SIDE DOWN DRAFT PAINT BOOTH

ENGINEERED FOR INDUSTRIAL & FLEET FINISHING APPLICATIONS

Product Overview

HIGH-PERFORMANCE SIDE DOWN DRAFT FINISHING SYSTEM



The Platinum Finishing Systems **HELIOS Side Down Draft Paint Booth** is engineered for military contractor, fleet, heavy-equipment, and industrial refinishing applications requiring elevated airflow performance and consistent overspray capture across a large working envelope. Filtered intake air is introduced through the side plenum system and moves uniformly across the work zone toward the opposing exhaust plenum.

This configuration utilizes crossdraft-style face-area airflow calculations to provide increased linear airflow velocity while maintaining balanced side-plenum airflow distribution throughout the full booth length. Available in multiple sizes and configurations to meet the demands of the most rigorous finishing environments.

HIGH-VOLUME AIRFLOW

Up to 53,400 CFM based on Width × Height × 100 FPM military specification

SIDE PLENUM DESIGN

Balanced dual-side plenum distribution for uniform capture across full booth

HEAT-READY

Factory-prepared for heated AMU integration for spray & cure cycles

FULL SAFETY

LEL monitoring, fire suppression interlocks, Grade D breathing air standard

Technical Specifications

PERFORMANCE ENGINEERING FOR DEMANDING ENVIRONMENTS

BOOTH CONFIGURATION

Airflow Type	Side Down Draft
Series	HELIOS
Available Sizes	Custom configurations (e.g., 29'-8" W × 18'-0" H × 53'-0" L)
System Airflow	Up to 53,400 CFM (size dependent)
Airflow Basis	Width × Height × 100 FPM
Configuration	Heat-ready (AMU integration capable)
Static Pressure	~0.5" external static pressure (straight duct runs)

EXHAUST FAN & MOTOR PACKAGE

Exhaust Fans	(4) ACME HQ30 belt-driven tube-axial, non-sparking polypropylene impellers, external belt tunnel
Motors	(4) Baldor TEFC industrial-duty, continuous operation, 208/230/480V, 3-phase
Fan Distribution	Evenly distributed across both side plenums for uniform airflow
Recirculation	Reverse blower with dedicated motor (up to 13,350 CFM)

DOORS, LIGHTING & FILTRATION

Main Product Doors	12' × 12' rollup fabric (roll-up upgrade available)
Personnel Doors	3' × 7' with observation glass (Qty: 2)
Standard Lighting	40 × LDPI 400SLB vapor-proof fixtures (LED upgrade available)
Overspray Capture	3-stage ≥98% per ANSI/ASHRAE 52.2-2017 (NESHAP 40 CFR 63 Subpart HHHHHH)
Air Outlets	(2) compressed air & (2) Grade D breathing air per booth

SAFETY & CONTROLS

LEL Monitoring	Automatic spray shutdown at 25% LEL per NFPA 33
Alarms / Faults	LEL high-high, fire suppression, fan fault, filter high, door interlock
Interlocks	Exhaust proof, door-open timeout, cure mode warnings, spray-gun air
Compliance	OSHA 29 CFR 1910.107, NFPA 33, NFPA 91

Built to Perform

INDUSTRIAL-GRADE CONSTRUCTION & INTEGRATED CONTROL SYSTEMS



HELIOS BOOTH — FRONT VIEW WITH OBSERVATION DOORS



MULTI-BOOTH INSTALLATION — INDUSTRIAL FACILITY

PFS CP1000 Control Panel



PFS CORE CP1000 — VFD READY, FAN & LIGHT CONTROLS, SCHNEIDER DISCONNECT

COMPLIANCE & SAFETY

Designed to conform to OSHA 29 CFR 1910.107 and NFPA 33. Standard features include LEL monitoring with automatic spray shutdown at 25% LEL, alarms for fire suppression activation, fan fault, filter high, and door interlock. All interlocks included: exhaust proof, door-open timeout, cure mode warnings, spray-gun air interlocks.

WARRANTY


Structure: 4-Year | **Electrical:** 1-Year | **Extended:** +1 Year with PFS Filters Supply Program enrollment (pfsfilters.com)

Optional Upgrades

ENHANCE YOUR HELIOS SYSTEM

OPTIONAL

PFS Apollo AMU — Heated Air Make-Up Unit

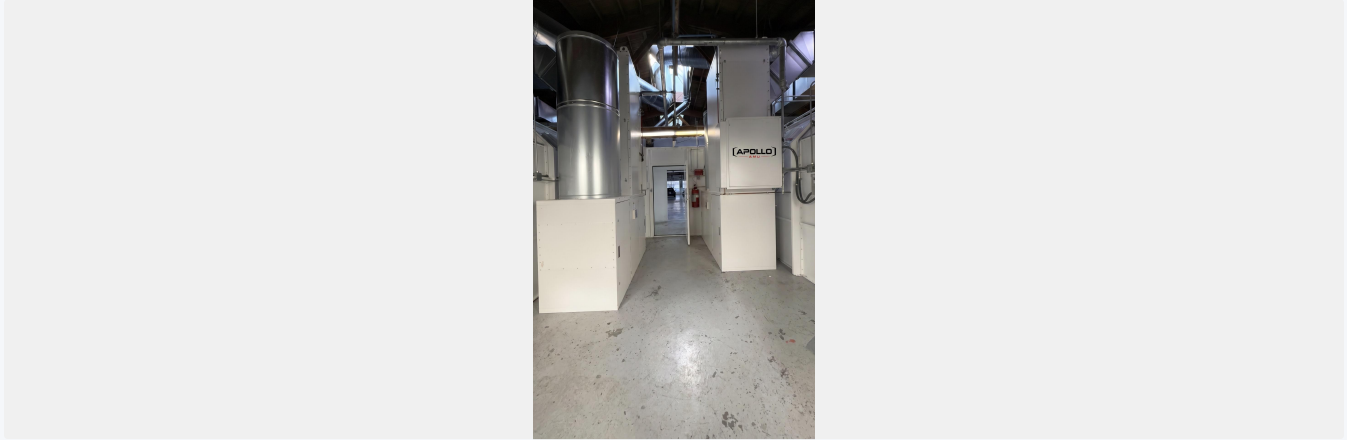

The PFS Apollo AMU Series features direct-fired gas furnaces with 98% thermal efficiency. Available in 750K–3M BTU output range with natural gas, propane, or electric options. Five installation configurations: horizontal, vertical, booth-mounted, roof-mounted, and outdoor.

- ✓ Direct-fired gas furnace — 98% thermal efficiency
- ✓ 750K–3M BTU range (natural gas, propane, or electric)
- ✓ Spray, Cure & optional Prep modes
- ✓ Variable Frequency Drives (VFD) for pressure balance
- ✓ 80/20 recirculation system (optional)
- ✓ G-90 galvanized steel, powder coated white
- ✓ Burner control with UV flame detection
- ✓ Optional humidity control module
- ✓ Optional electric heater alternative
- ✓ Interior & exterior installation approved

OPTIONAL

Additional Available Options

- ✓ Powder coating upgrade — bright white, inside & out
- ✓ LED lighting upgrade
- ✓ Roll-up product door upgrade
- ✓ Tempered-glass observation windows
- ✓ Single-phase motor configuration
- ✓ PFS Duct Kits (30" & 18" diameter)



PLATINUM FINISHING SYSTEMS

1400 Airport Blvd
Santa Rosa, California 95403
pfsfilters.com

ENGINEERED IN THE USA • BUILT FOR PERFORMANCE