


TPS > 25% AND SCS FAULT (SHORT TO VSS) DETECTOR

0.24V to TRIG_H (RV1 TRIM-POT)

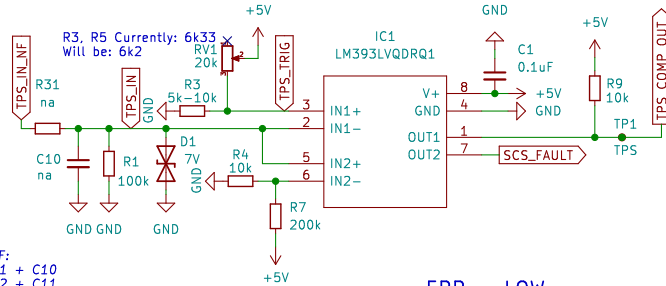


LPF:
R31 + C10
R32 + C11
1k2 + 1uF - 130 Hz cut-off

ERR = LOW

Step: 1

HARD BRAKING AND SCS FAULT (SHORT TO VSS) DETECTOR


0.24V to TRIG_H (RV2 TRIM-POT)

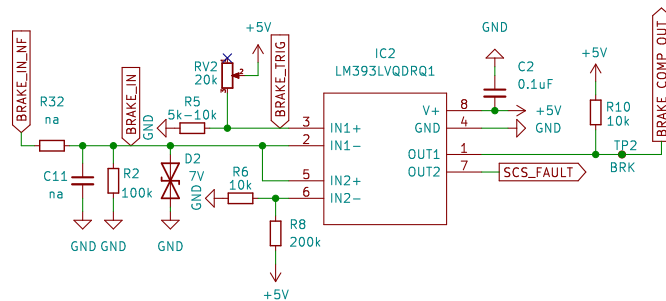

ERR = LOW


Step: 1

SCS FAULT (SHORT TO VDD) DETECTOR

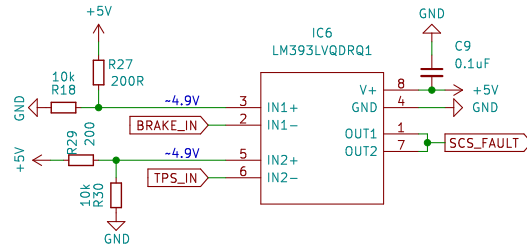

ERR = LOW

NOR

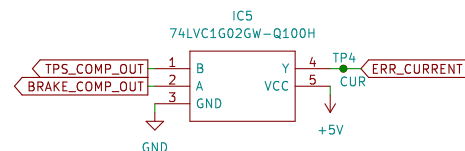


ERR = HIGH

Step: 2


DELAY'S SECTION

Use capacitors without DC BIAS for time and at least X7R for any other capacitor

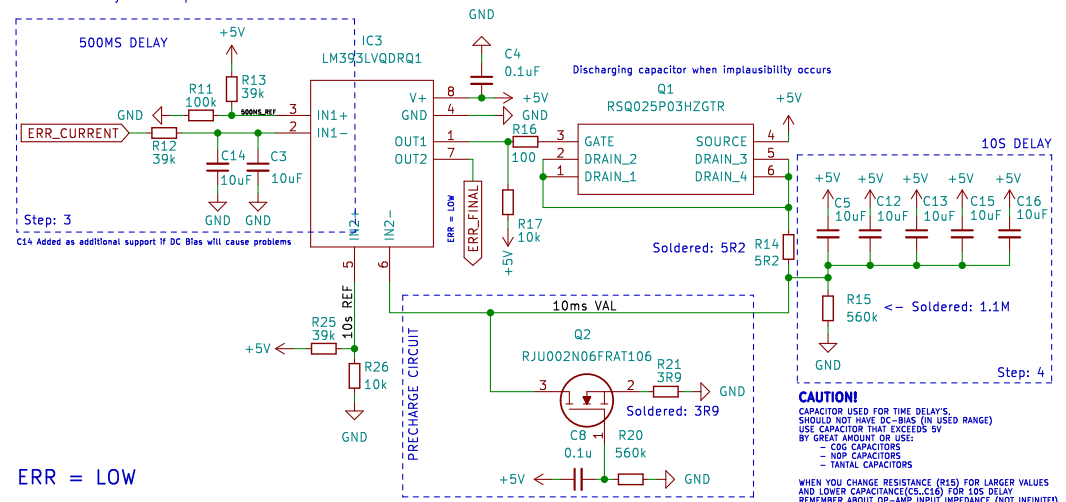


ERR = LOW

SAFETY SWITCH

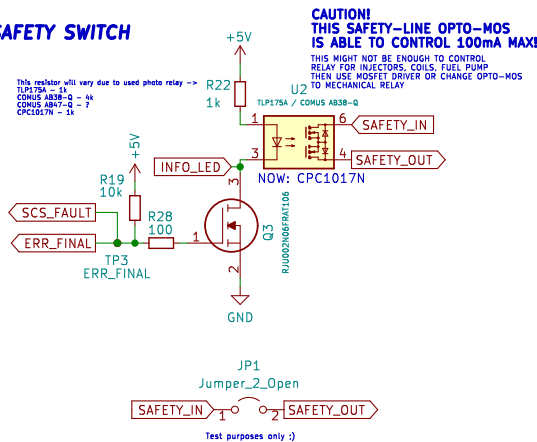


LDO 5V

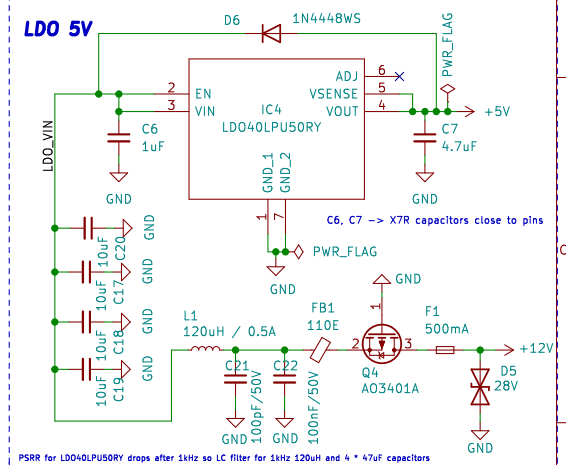


Step: 5

HEADER

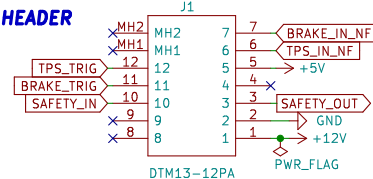

INFO LED



Based on FSG reference schematic

Karol Pergot

PGRacing Team

Sheet: /

File: BSPD-07.kicad_sch

Title: BSPD for PGR-07/08 (2023/24)

Size: User Date:

KiCad E.D.A. kicad (6.0.8)

Simulation:

<https://tinyurl.com/2zsdrhah>

Rev: 1.0

Id: 1/1