

Electrodermal Activity (EDA) Sensor Data Sheet

EDA 15102015

SPECIFICATIONS

- > **Range:** 0-13 μ S
- > **Bandwidth:** 0-3Hz
- > **Consumption:** ~0.72mA
- > **Input Impedance:** >1GOhm
- > **CMRR:** 100dB

FEATURES

- > Skin resistance measurement
- > Pre-conditioned analog output
- > High signal-to-noise ratio
- > Shielded miniaturized cables
- > Medical-grade raw data output
- > Ready-to-use form factor

APPLICATIONS

- > Sympathetic nervous system monitoring
- > Arousal detection
- > Human-Computer Interaction
- > Emotional cartography
- > Affective computing
- > Physiology studies
- > Psychophysiology
- > Relaxation biofeedback
- > Biomedical devices prototyping

GENERAL DESCRIPTION

Electrodermal Activity (EDA) can be defined as a transient change in certain electrical properties of the skin, resulting from sweat secretion and sweat gland activity. These changes can result from elicited or natural stimuli that trigger a regulatory response by the sympathetic nervous system. Our EDA sensor is capable of accurately measuring the skin activity with high sensitivity in a miniaturized form factor. The low-noise signal conditioning and amplification circuit design provides optimal performance in the detection of even the most feeble electrodermal skin response events. Examples:

<http://bit.ly/1HGyYE5>

<http://bit.ly/1Gw9r1x>

<http://bit.ly/1JraXmy>

<http://www.plux.info/files/ftp/docs/PaperMedeTel-HG.pdf>

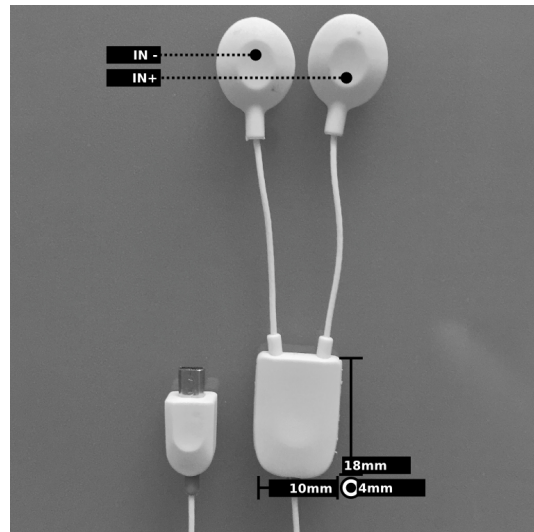


Fig. 1. Miniaturized form factor for minimally-intrusive application on the subjects.

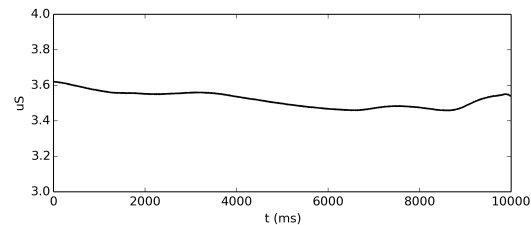


Fig. 2. Typical raw EDA data (acquired with biosignals).



Fig. 3. Example placement on the index and ring fingers.

biosignalsplux
wearable body sensing platForm

PLUX – Wireless Biosignals, S.A.
Av. 5 de Outubro, n. 70 – 8.
1050-059 Lisbon, Portugal
plux@plux.info
<http://biosignalsplux.com/>

REV A

© 2015 PLUX

This information is provided "as is," and we make no express or implied warranties whatsoever with respect to functionality, operability, use, fitness for a particular purpose, or infringement of rights. We expressly disclaim any liability whatsoever for any direct, indirect, consequential, incidental or special damages, including, without limitation, lost revenues, lost profits, losses resulting from business interruption or loss of data, regardless of the form of action or legal theory under which the liability may be asserted, even if advised of the possibility of such damages.

Electrodermal Activity (EDA) Sensor Data Sheet

TRANSFER FUNCTION

$[-1.2\mu S, 13.7\mu S]$

$$EDA(\mu S) = \frac{\frac{ADC}{2^n} \cdot VCC - 0.259388}{0.2}$$

$$EDA(S) = EDA(\mu S) \cdot 1 \times 10^{-6}$$

$VCC = 3V$ (operating voltage)

$EDA(\mu S)$ – EDA value in microsiemens (μS)

$EDA(S)$ – EDA value in Siemens (S)

ADC – Value sampled from the channel

n – Number of bits of the channel¹

PHYSICAL CHARACTERISTICS

> **W1 x L1 x H1:** 1.0x1.8x0.4cm

> **W2 x L2 x H2:** 1.5x2.3x0.4cm


> **A1:** 105.0±0.5cm

> **A2:** 5.0±0.5cm

> **A3:** 5.0±0.5cm

> **D:** 0.4cm

> **S:** White, Black, Blue, Green, Red, Yellow, Gray, or Brown

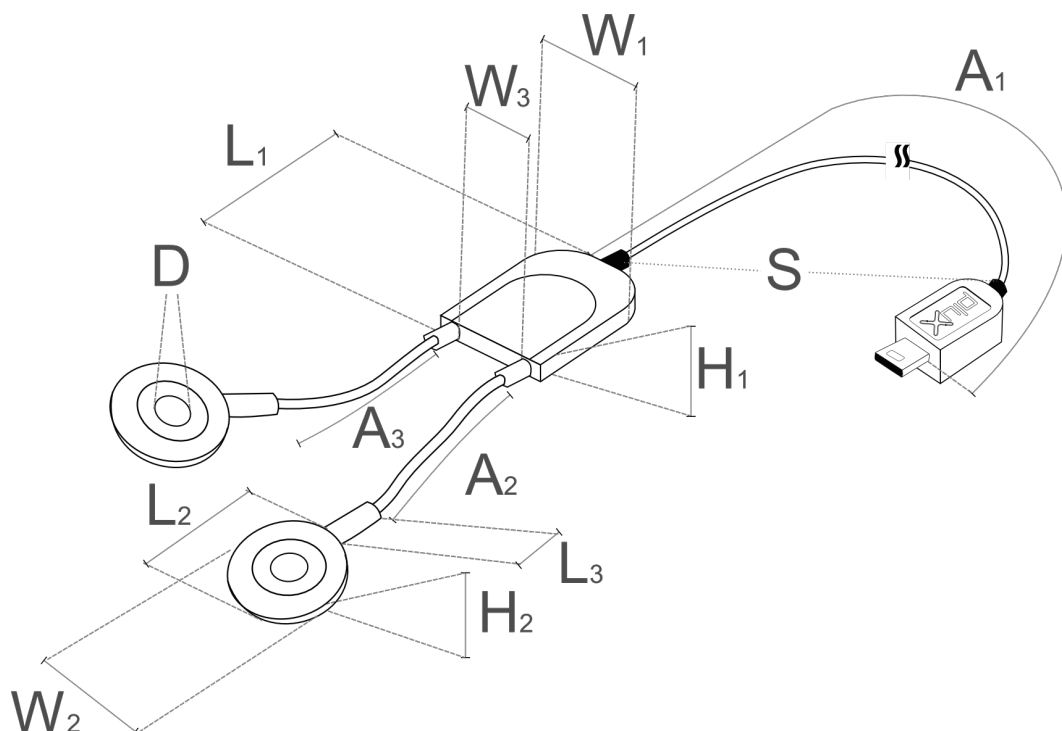

¹ The number of bits for each channel depends on the resolution of the Analog-to-Digital Converter (ADC); in biosignalsplux the default is 16-bit resolution ($n = 16$), although 12-bit ($n = 12$) and 8-bit ($n = 8$) may also be found.

Electrodermal Activity (EDA) Sensor Data Sheet

ORDERING GUIDE

Reference	Package Description
EDA1	Electrodermal Activity (EDA) sensor with standard physical characteristics and a random cable sleeve color
EDA1-A1-A2-A3-S	Electrodermal Activity (EDA) sensor built with custom lengths A1, A2 and/or A3 (all in cm), and custom sleeve color S; for standard physical characteristics in A1, A2, A3, or S use 0. Examples: > EDA1-200-0-0-0: Otherwise all-standard EDA sensor except for a 200cm cable A1 > EDA1-0-0-0-Yellow: Otherwise all-standard EDA sensor except for a yellow cable sleeve > EDA1-50-10-10-Red: Fully custom EDA sensor with a 50cm cable A1, 10cm electrode cables A2 & A3, and a red cable sleeve