


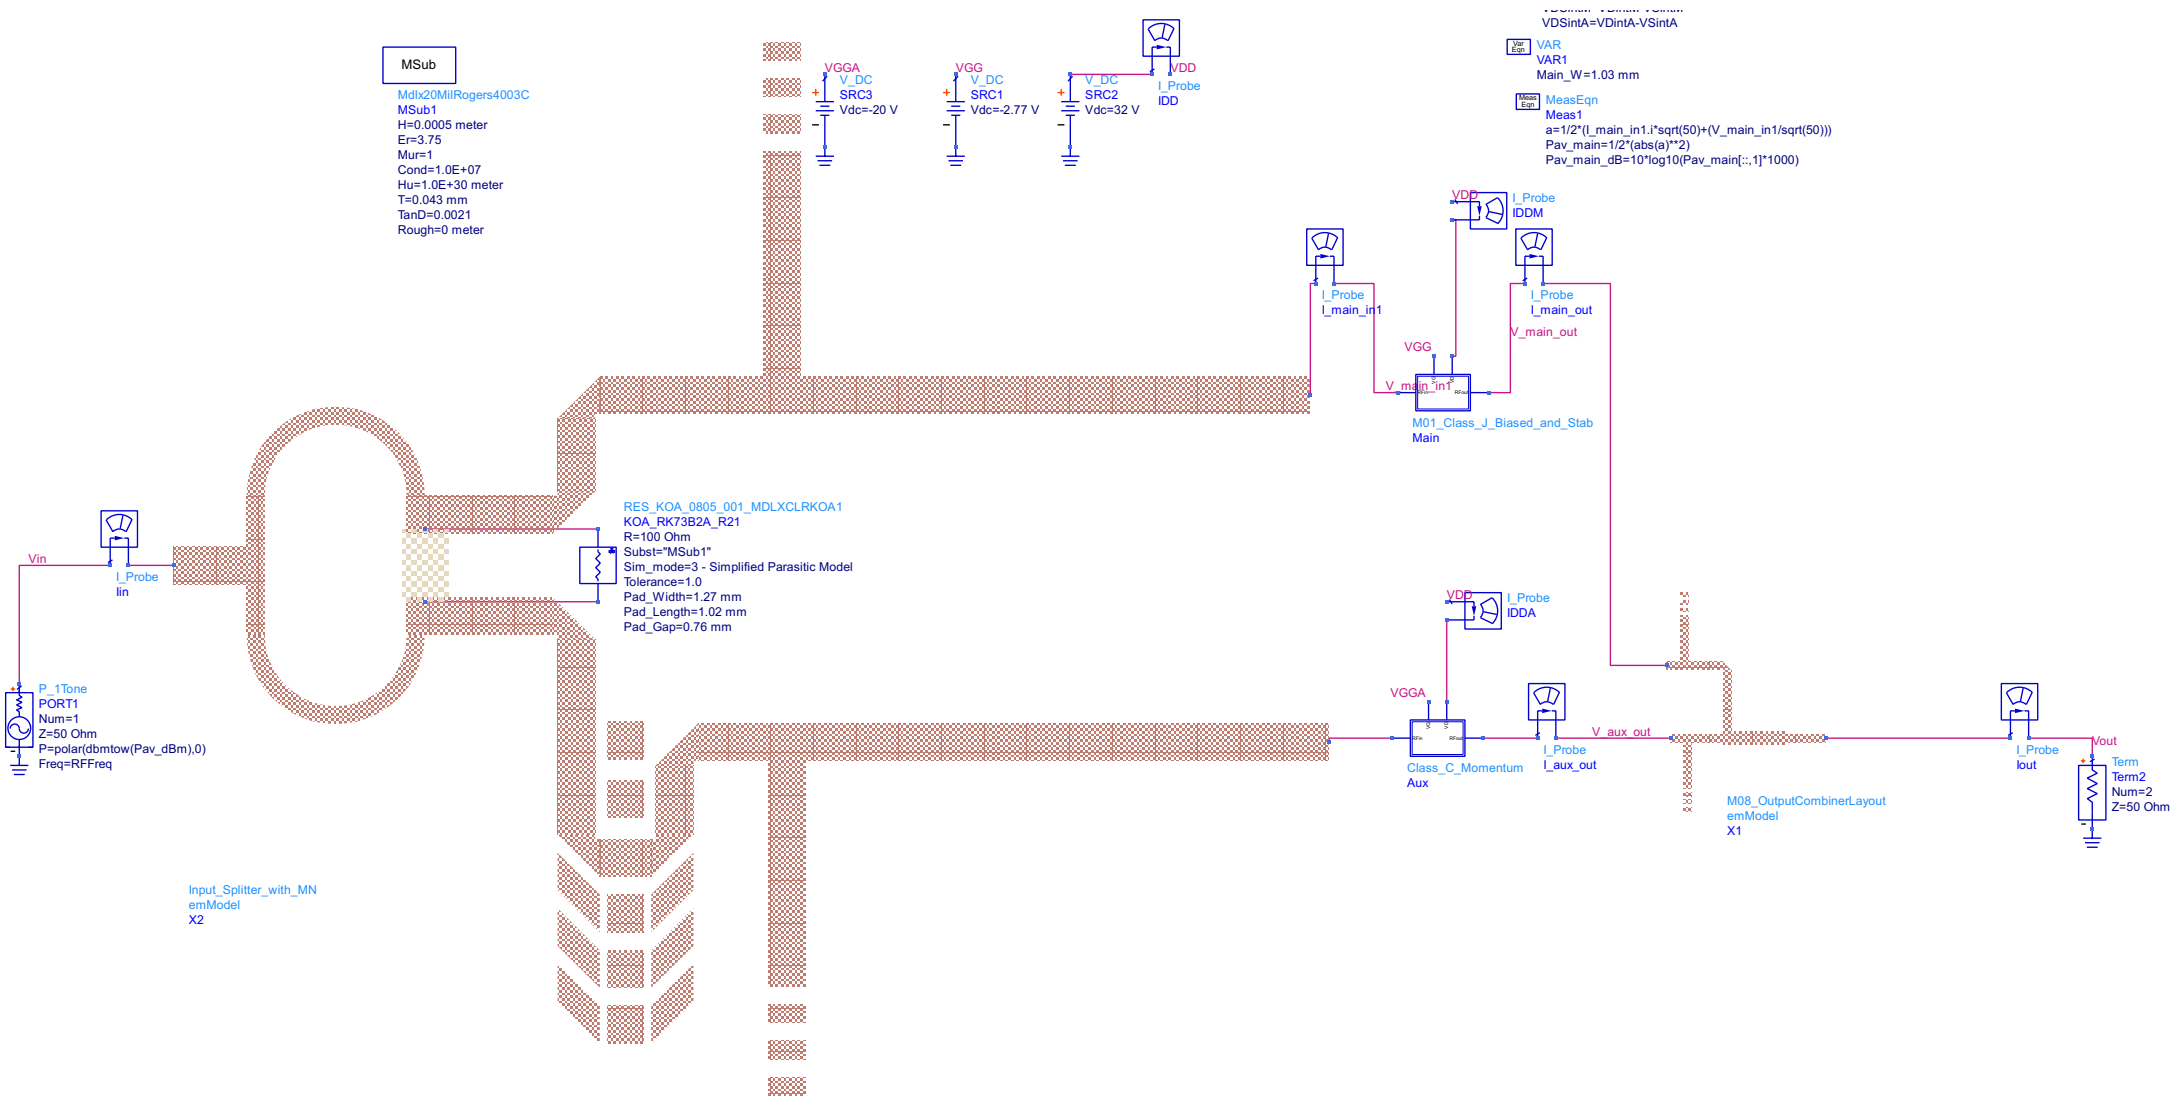

MSub

Mdx20MilRogers4003C
MSub1
H=0.0005 meter
Er=3.75
Mur=1
Cond=1.0E+07
Hu=1.0E+30 meter
T=0.043 mm
TanD=0.0021
Rough=0 meter

RES_KOA_0805_001_MDLXCLRKOA1
KOA_RK73B2A_R21
R=100 Ohm
Subst="MSub1"
Sim_mode=3 - Simplified Parasitic Model
Tolerance=1.0
Pad_Width=1.27 mm
Pad_Length=1.02 mm
Pad_Gap=0.76 mm

VDSintA=VDintA-VSintA
VAR
VAR1
Main_W=1.03 mm
MeasEqn
Meas1
a=1/2*(I_main_in1.i*sqrt(50)+(V_main_in1/sqrt(50)))
Pav_main=1/2*(abs(a)**2)
Pav_main_dB=10*log10(Pav_main[::1]*1000)

M01_Class_J_Biased_and_Stab
Main

Class_C_Momentum
Aux

M08_OutputCombinerLayout
emModel
X1

Input_Splitter_with_MN
emModel
X2

Term
Term2
Num=2
Z=50 Ohm