SPECIFICATIONS

WEIGHTS		STD & LR Versions		AR Version	
Maximum Takeoff Weight	STD	107,564 lb	48,790 kg	115,280 lb	52,290 kg
	LR	111,973 lb	50,790 kg		
Maximum Landing Weight		99,208 lb	45,000 kg	100,972 lb	45,800 kg
Maximum Zero Fuel Weight		93,696 lb	42,500 kg	93,917 lb	42,600 kg
Basic Operation Weight		63,603 lb	28,850 kg	63,824 lb	28,950 kg
Maximum Payload		30,093 lb	13,650 kg	30,093 lb	13,650 kg
Maximum Fuel*		28,596 lb	12,971 kg	28,596 lb	12,971 kg

*Fuel Density: 0.803 kg/l (6.70lb/gal)

PERFORMANCE (AR Version)		
Maximum Operating Speed	M 0.82	M 0.82
Time to Climb to FL 350, TOW for 500 nm	18 min	18 min
Takeoff Field Length, ISA, SL MTOW	7,149 ft	2,179 m
Takeoff Field Length, ISA, SL TOW to 500 nm	4,790 ft	1,460 m
Landing Field Length, ISA SL MLW	4,206 ft	1,282 ft
Range 108 PAX @ 220 lb (100 kg), LRC	2,200 nm	4,077 km

EXTERNAL DIMENSIONS		
Wingspan	94 ft 3 in	28.72 m
Length Overall	126 ft 10 in	38.65 m
Height Overall	34 ft 7 in	10.55 m
Horizontal Stabilizer Span	39 ft 8 in	12.08 m
Fuselage Width	9 ft 11 in	3.01 m
Fuselage Height	11 ft 0 in	3.35 m

INTERNAL DIMENSIONS		
Cabin Length (excluding cockpit)	92 ft 5 in	28.17 m
Cabin Width (at armrest)	9 ft 0 in	2.74 m
Cabin Height	6 ft 7 in	2.00 m
Aisle Width	19.75 in	0.50 m
Seat Width	18.25 in	0.46 m

VIEWS

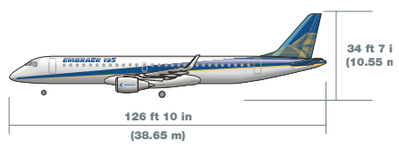

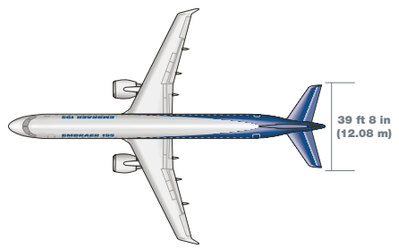



EMBRAER

June 2007

EMBRAER 195

EMBRAER

A NEW CABIN CONCEPT

A double-bubble fuselage design means passengers enjoy an extraordinary amount of personal space. The widest seat and the widest aisle in the category add to passenger comfort. Four-abreast seating eliminates the undesirable middle seat, easing access and making boarding and deplaning smoother and faster.

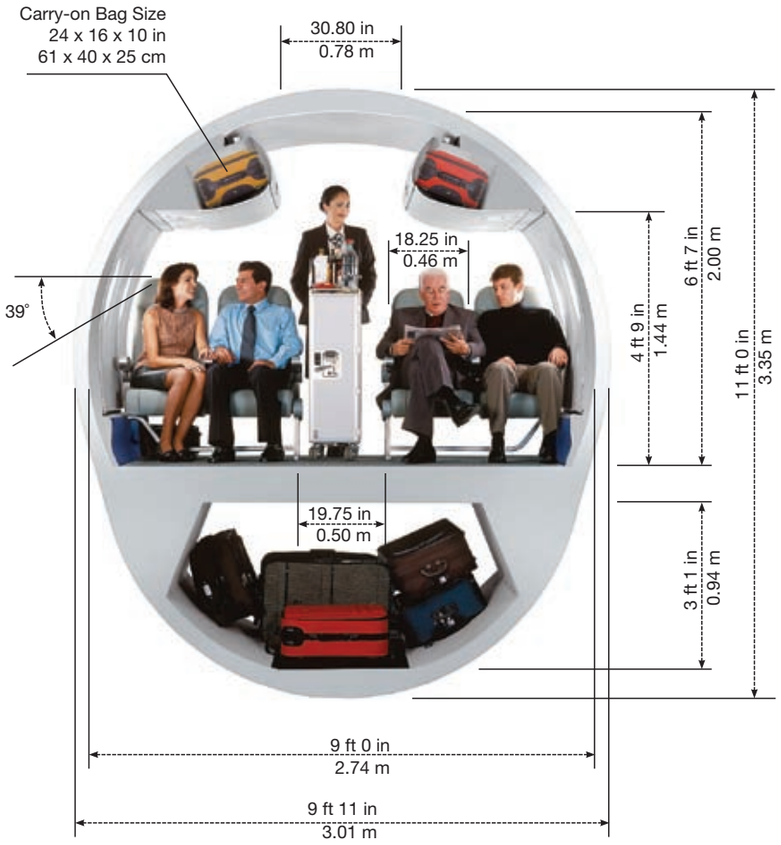

EMBRAER 195 INTERIOR LAYOUTS

SINGLE CLASS
108 seats at 32” pitch

SINGLE CLASS
118 seats at 31” pitch

HIGH CAPACITY
122 seats at 30”/31” pitch

DUAL CLASS
106 seats (8F/98Y) at 38”/31” pitch

FLY-BY-WIRE (FBW)

Pilot workload is reduced and aircraft performance is optimized with integrated flight control systems guided by fly-by-wire technology. FBW and 100% cockpit commonality minimize crew transition costs between any aircraft in the E-Jets family.

ENGINE

FADEC-controlled diagnostics, fully interchangeable right and left engines, environmental enhancements, and 30-minute LRU replacement efficiency make General Electric’s CF34-10E the most comprehensive, value-added propulsion system in the industry.

Engine Characteristics GE CF34-10E	
Sea Level Flat Rating	86F/30C
APR Thrust - Installed	20,000 lb
NTO Thrust - Installed	18,500 lb
Length	145.5 in / 369.6 cm
Weight - Dry Engine	3,700 lb / 1,678 kg
Maximum Diameter	57 in / 145 cm
Thrust-to-Weight Ratio	5.41
Fan Bypass Ratio	5.4:1
Noise	Stage III and IV Compliant

COCKPIT

01. Audio Control Panel
02. Speed Brake
03. Cursor Control Device (CCD)
04. EICAS
05. Integrated Electronic Standby System (IESS)
06. Lights Panel
07. Guidance Panel
08. Landing Gear
09. Primary Flight Display (PFD)
10. Multi-Function Display (MFD)
11. Multi-Function Control Display Unit (MCDU)
12. Engine Panel
13. Ram Air Turbine
14. Flap
15. Thrust Lever

PERFORMANCE

Short field capability, superior hot and high performance, and 2,200 nm range combine to deliver maximum operational versatility.



ASSUMPTIONS
Typical Mission Reserves - Cruise at M 0.78 - Passengers @ 100 kg (220 lb) each

ECONOMICS

The cost-effective use of the latest technologies makes the EMBRAER 195 the most efficient aircraft available in the 108 to 122 seat segment. The best structural efficiency, excellent fuel burn and outstanding aircraft maintainability characteristics provide significant cost advantages to airlines.

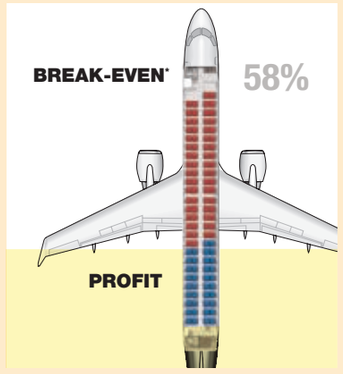

* Based on Total Operation Costs; 600 sm sector

EMBRAER