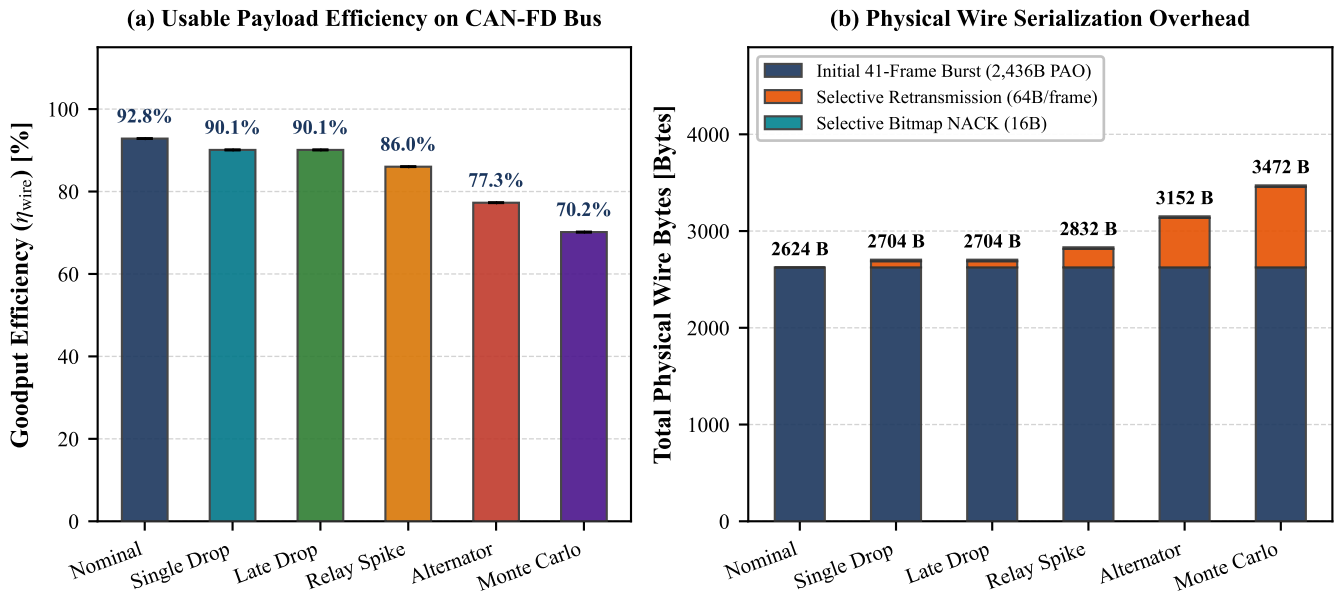
(a) Usable Payload Efficiency on CAN-FD Bus
Goodput Efficiency (η_{wire}) [%]
0
20
40
60
80
100
92.8%
90.1%
90.1%
86.0%
77.3%
70.2%
Nominal
Single Drop
Late Drop
Relay Spike
Alternator
Monte Carlo
(b) Physical Wire Serialization Overhead
Total Physical Wire Bytes [Bytes]
Initial 41-Frame Burst (2,436B PAO)
Selective Retransmission (64B/frame)
Selective Bitmap NACK (16B)
0
1000
2000
3000
4000
2624 B
2704 B
2704 B
2832 B
3152 B
3472 B
Nominal
Single Drop
Late Drop
Relay Spike
Alternator
Monte Carlo