

1)Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping message.

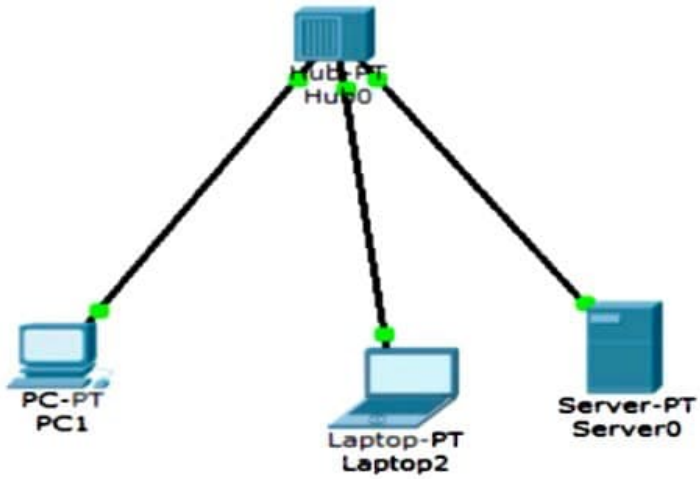

Successful	PC1	Laptop2	ICMP		0.000	N	7	(edit)	(delete)
Successful	Laptop2	Server0	ICMP		0.000	N	8	(edit)	(delete)
Successful	Server0	PC1	ICMP		0.000	N	9	(edit)	(delete)

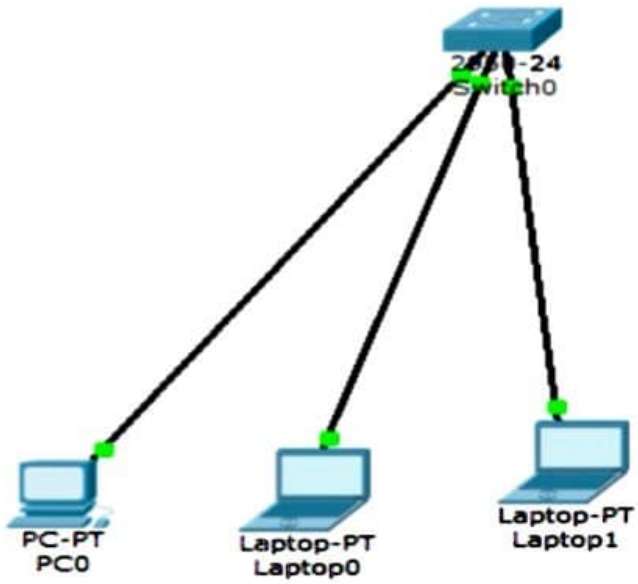


PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time (sec)	Periodic	Num	Edit	Delete
	Successful	PC0	Laptop0	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC0	Laptop1	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC0	Laptop1	ICMP		0.000	N	2	(edit)	(delete)
	Successful	Laptop0	Laptop1	ICMP		0.000	N	3	(edit)	(delete)

1.) create a topology & simulate sending a simple PDU from source to destination using a hub & switch as connecting devices & demonstrate ping message.

→ Step 1: Topology

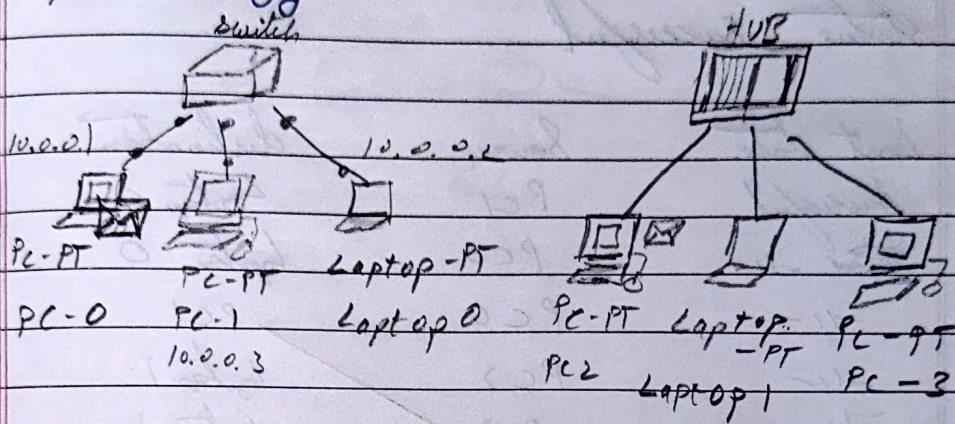

Step 2: configure IP address to each device or host as shown.

Step 3: click on IP configuration. Assign the any class of IP address

Step 4: Repeat the same process to assign IP address for all hosts in the topology

Step 5: for checking connectivity select "simple PDU packet" from right side of packet tracer & select source PC & destination PC. you will get a response at right bottom of the packet tracer window.

Step 6: To get the ping response open desktop of host & select command prompt. Run the command

classmate
Date
Page

output

Connection Tested : PC0 → PC1
Status : Successful

Connection Tested : PC2 → PC3
Status : Successful

Last status	Source	Destination
Successful	PC1	Laptop 0
-11-	PC0	Laptop 0
-11-	PC0	PC1
-11-	PC2	Laptop 1
-11-	PC3	Laptop 1
-11-	PC2	PC3

21/8/26