Configure IP address to routers in packet tracer. Explore the following messages ping, responses, des na on unreachable ,request med out, reply.

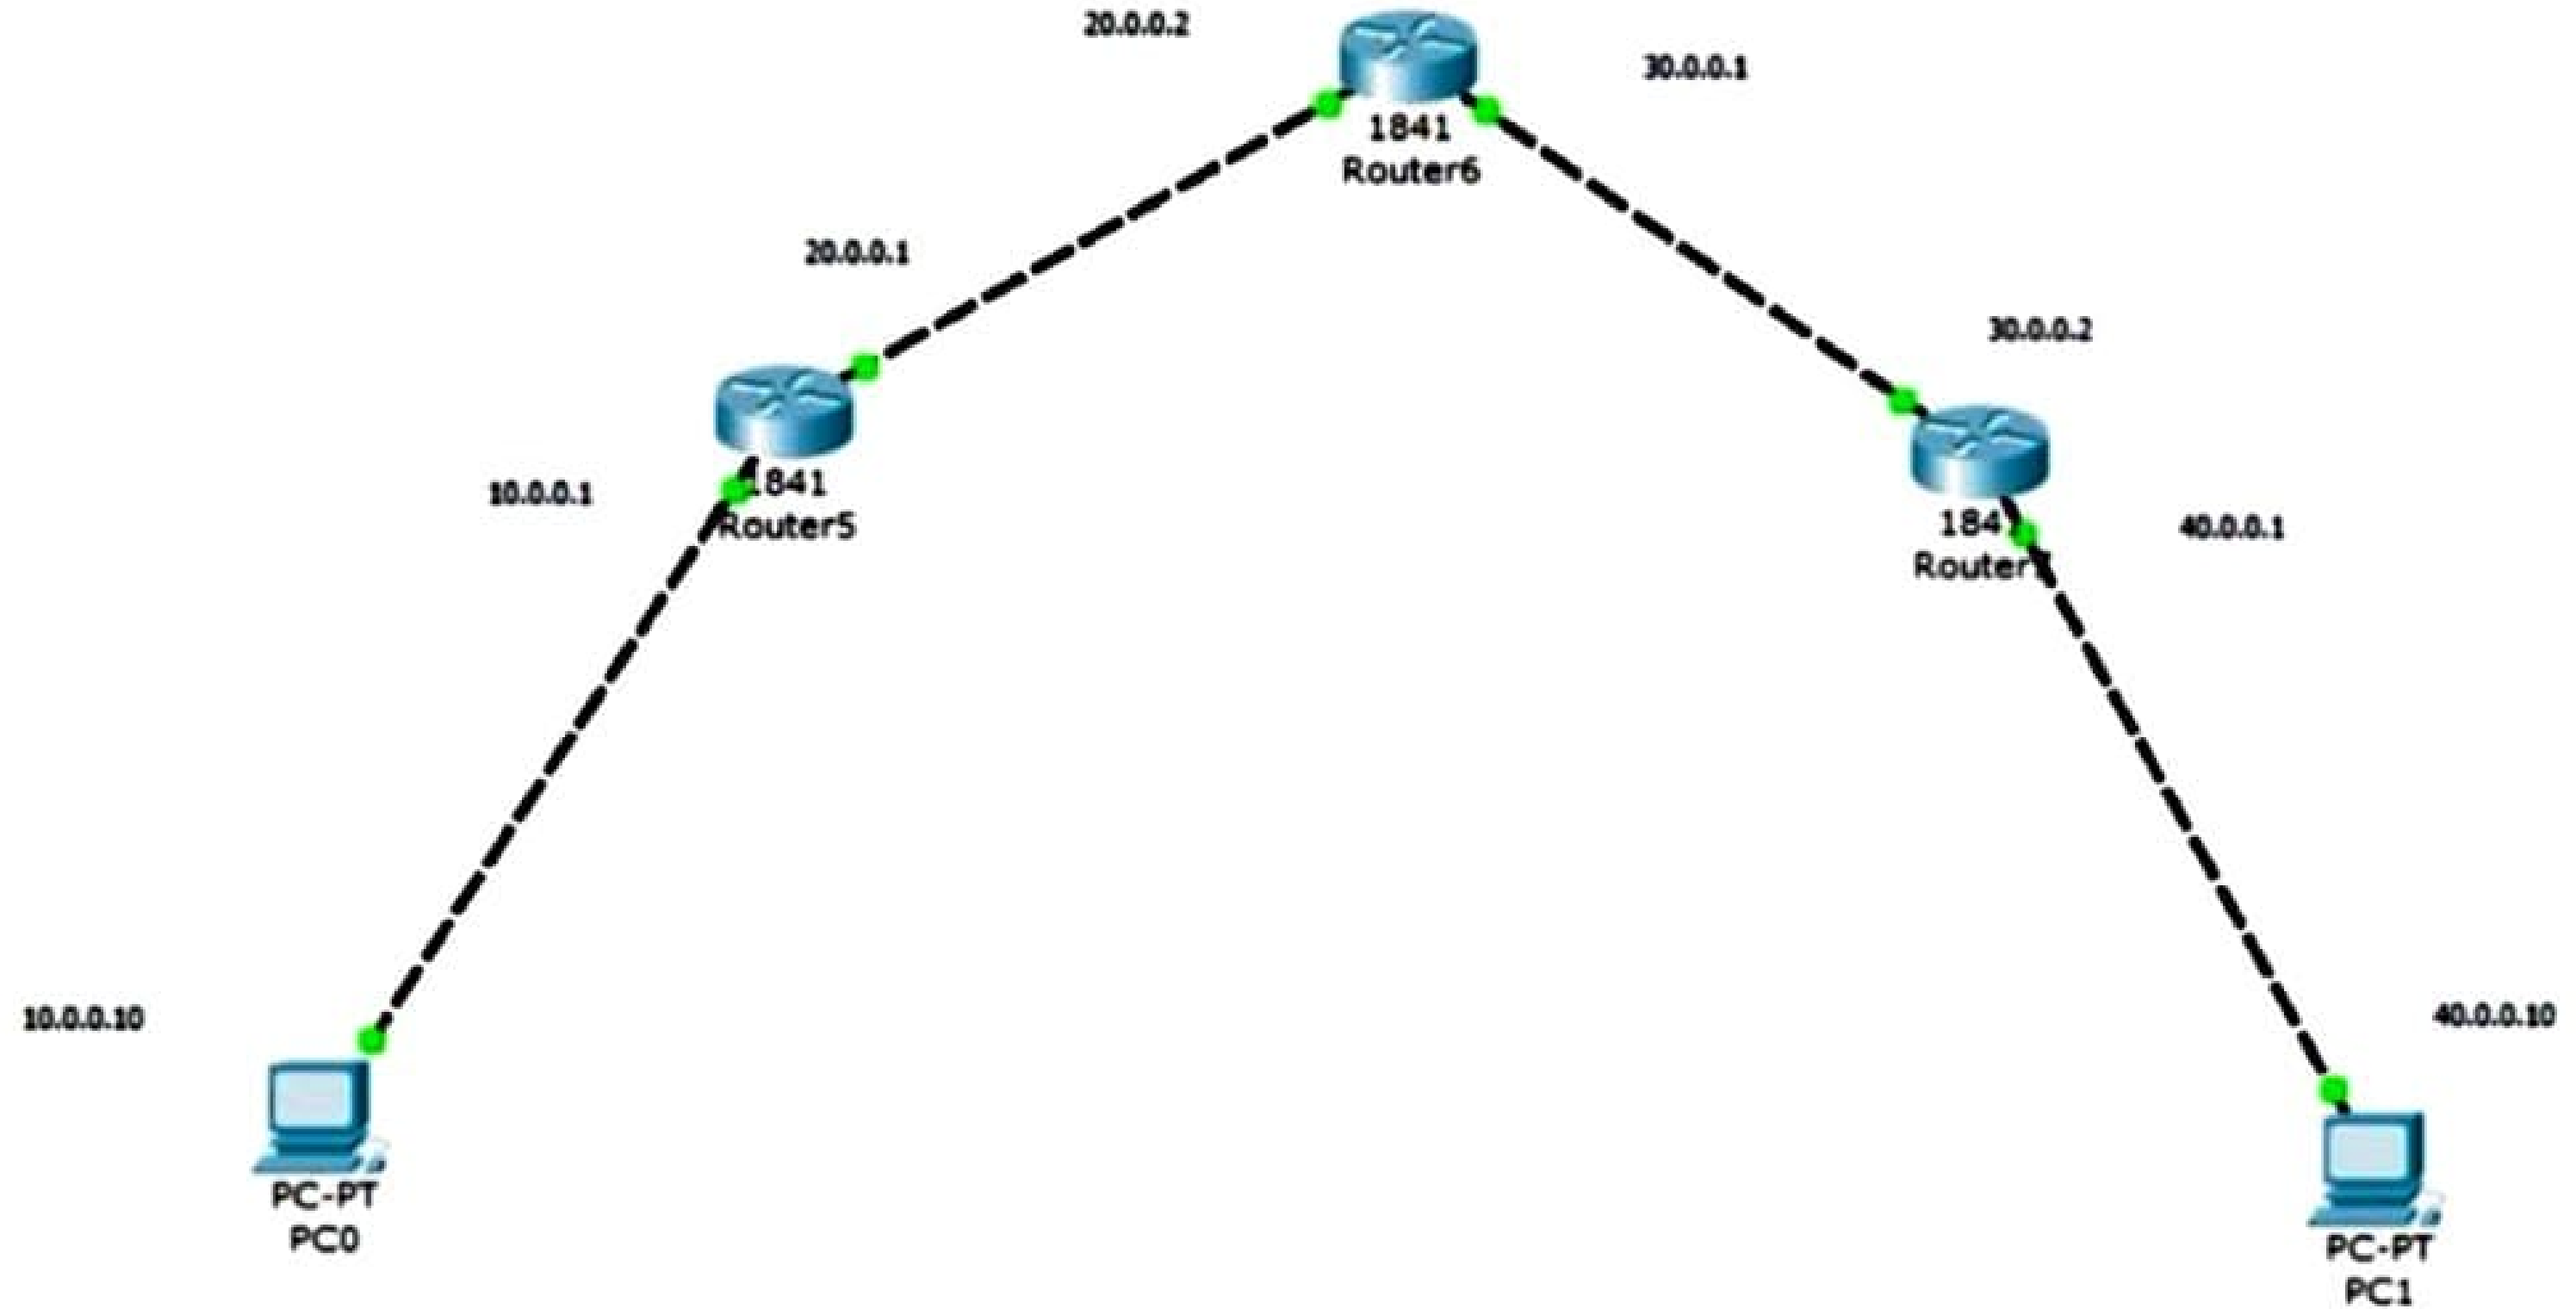

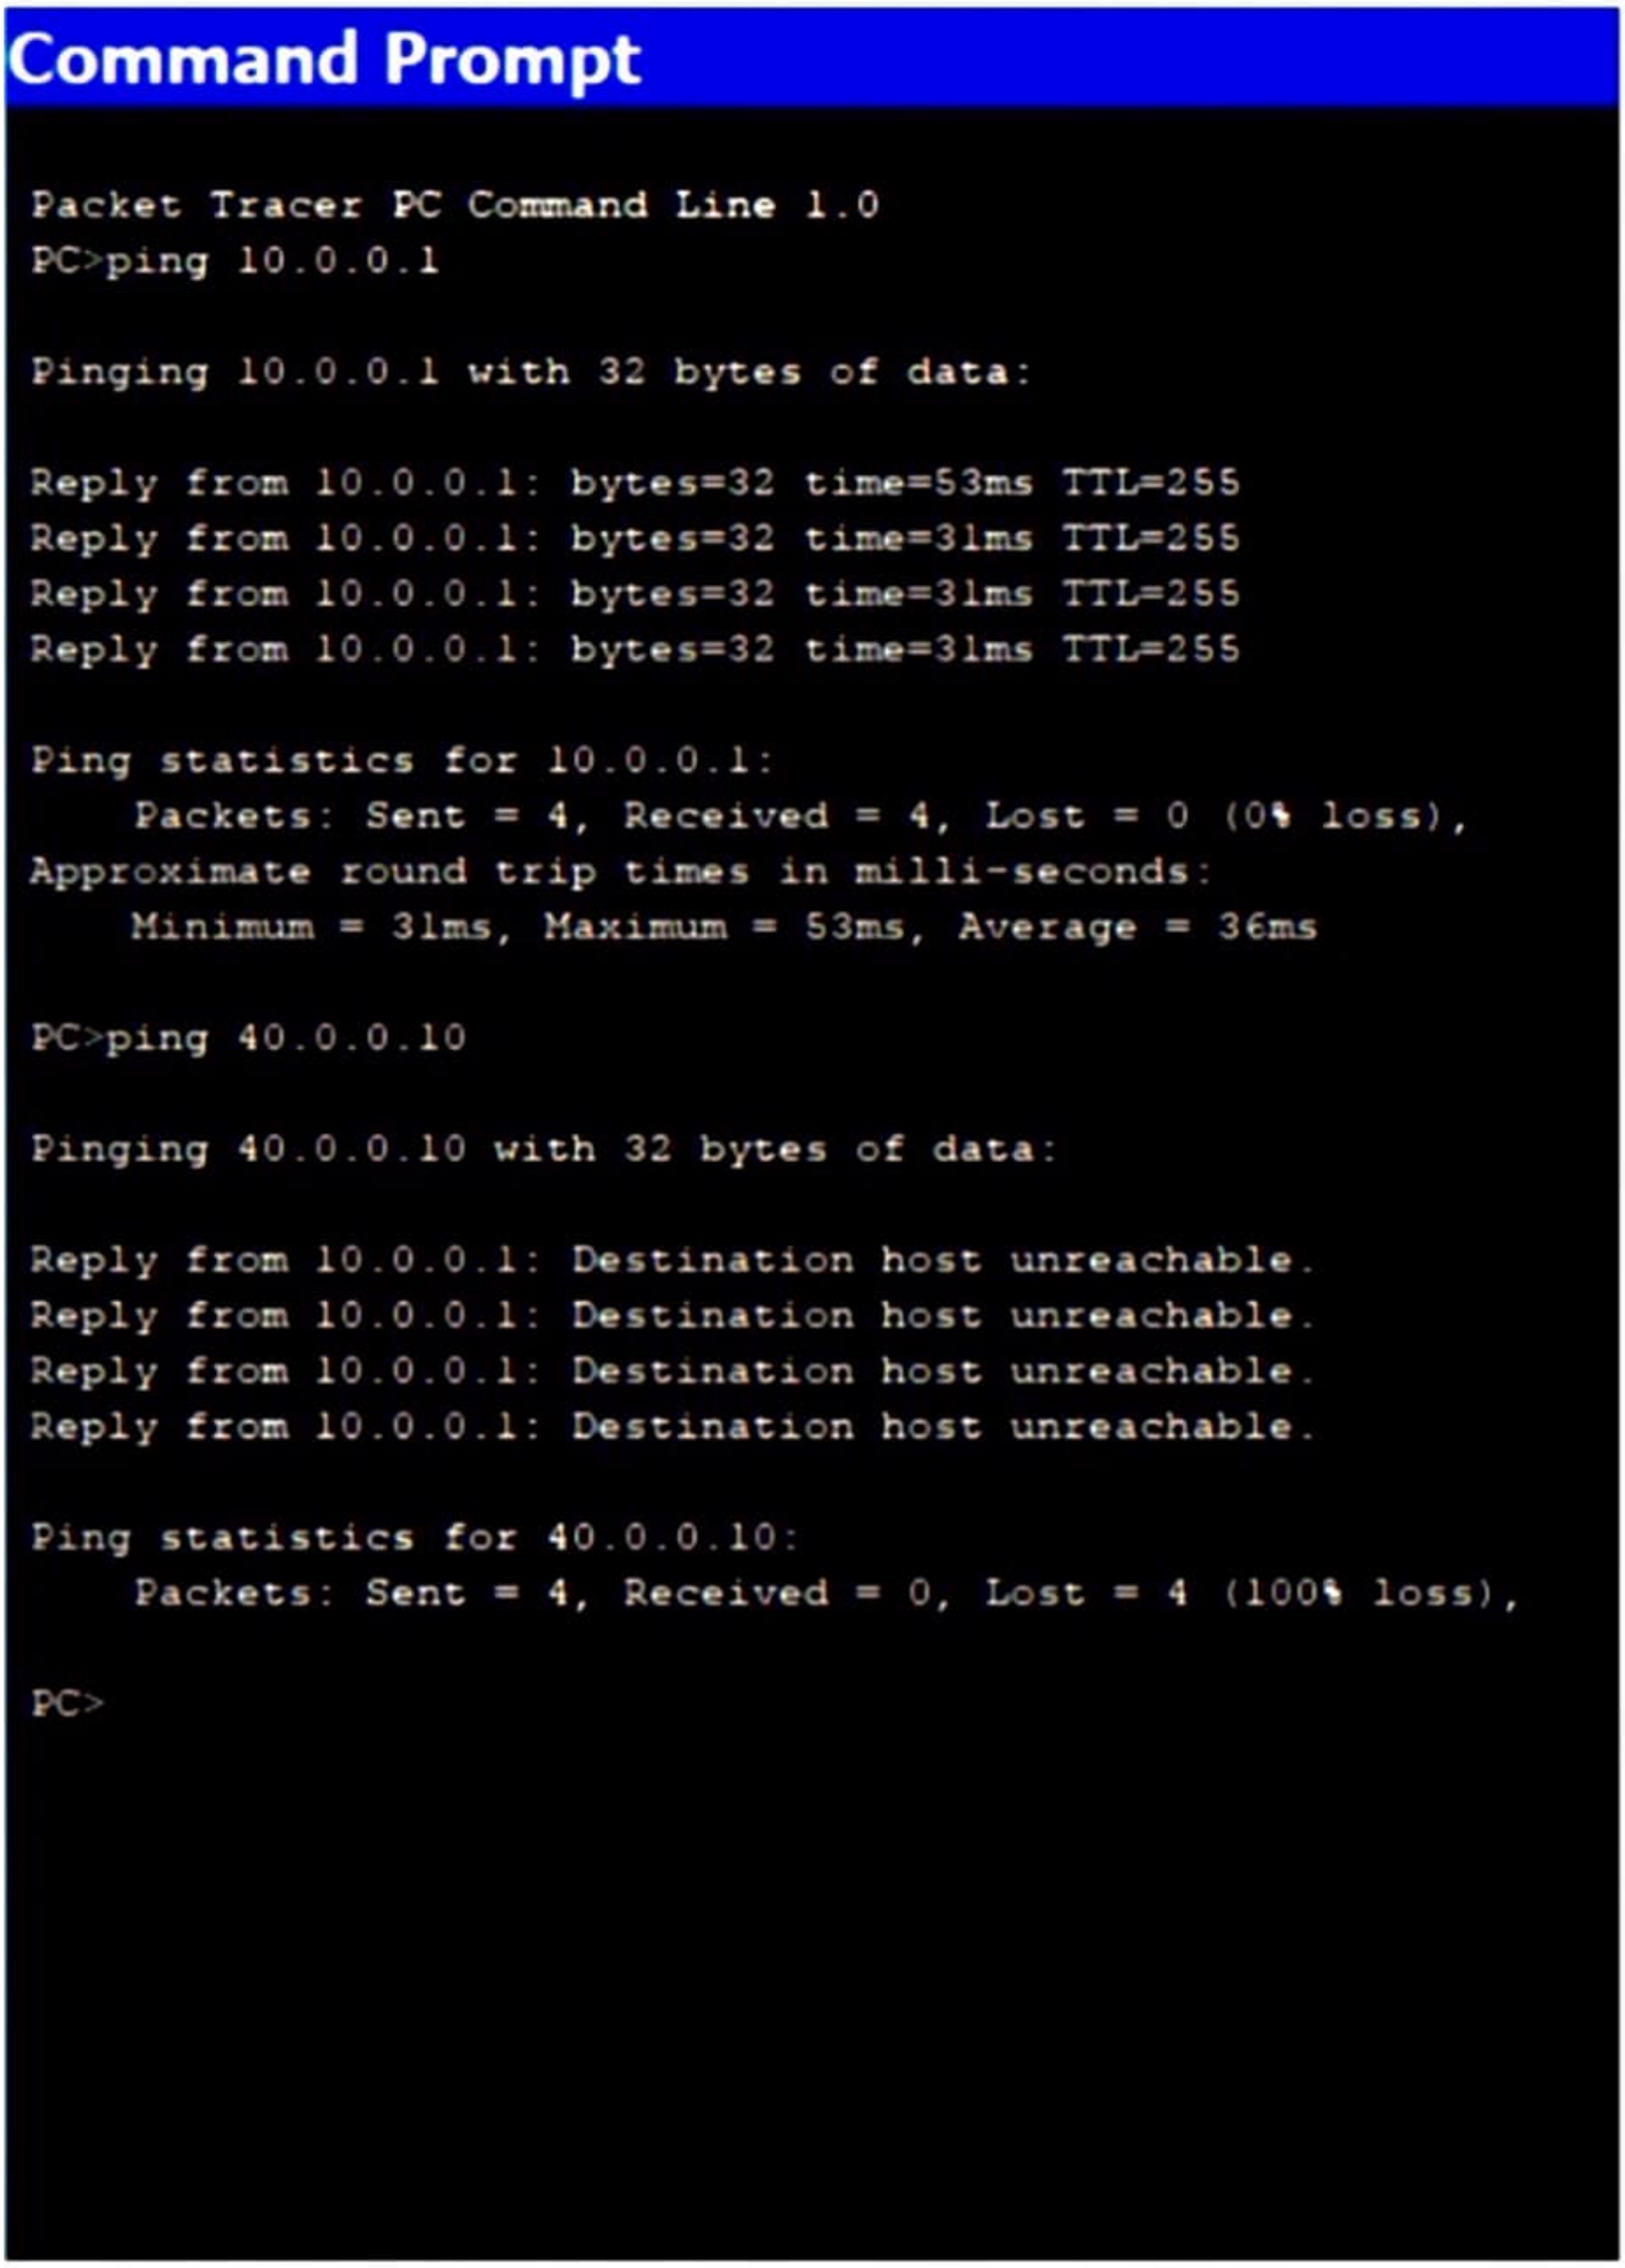

```
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=53ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 31ms, Maximum = 53ms, Average = 36ms

PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>
```

2.) configure IP address to routers in packet tracer. Explore the following messages: ping, responses, destination unreachable, request timed out, reply

→ Step 1: Topology

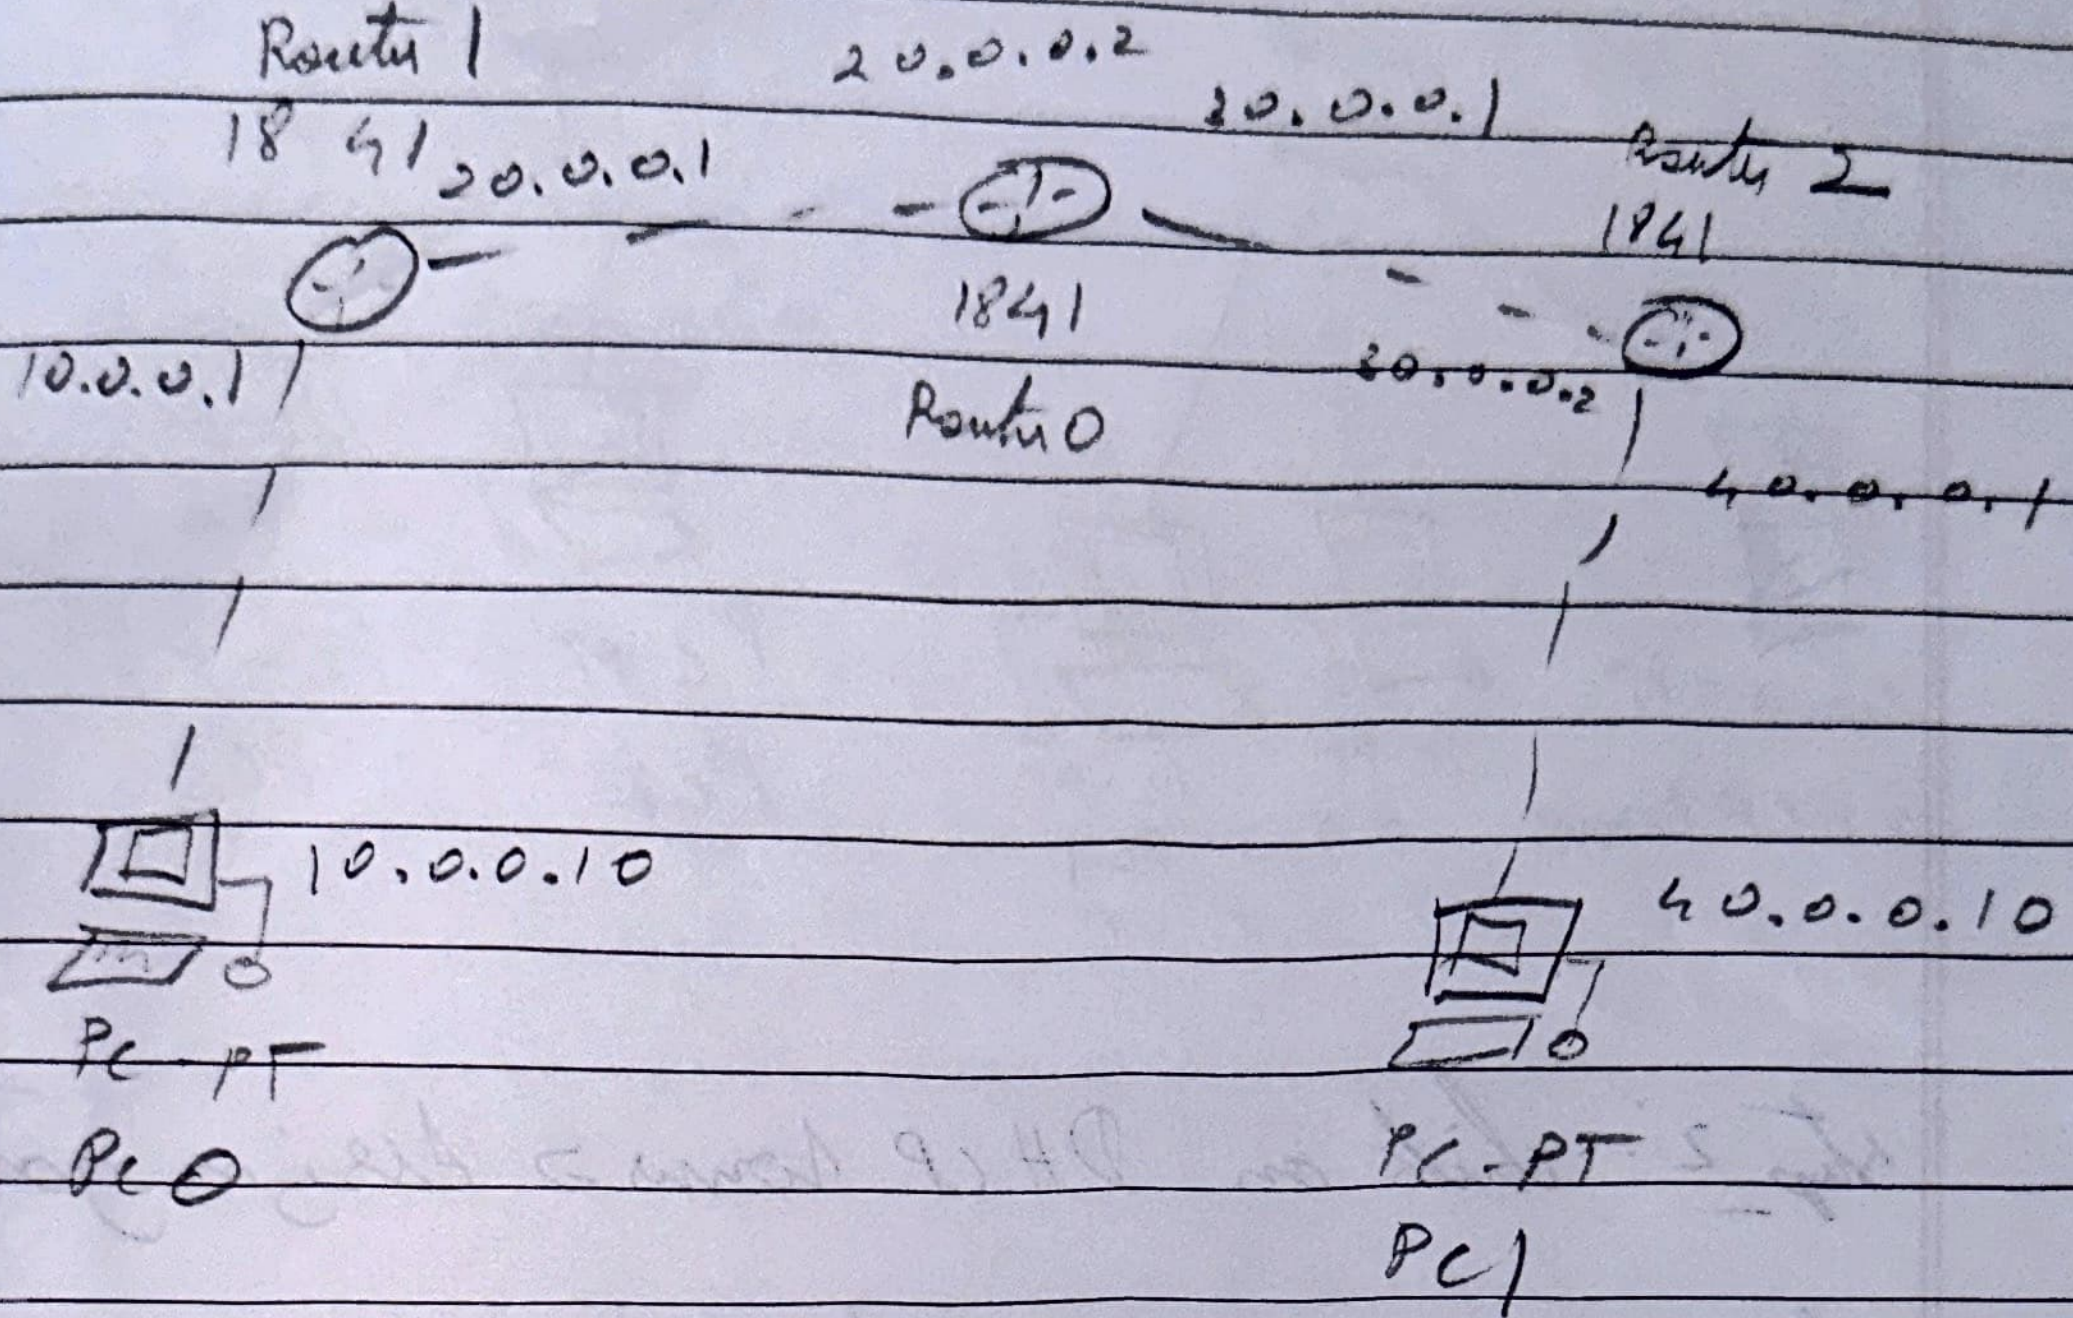

Step 2: configure interface IP address to router

Step 3: Now configure router interface with ip address & subnet mask then give no shutdown to make this interface & line protocol up.

Step 4: Now lights on all ports become green from red. Now open cmd of PC & check for ping messages, Destination reachable, request time out & reply.

Output

~~Connection Establish : PC0 → PC1~~

~~Status : Successful.~~

2.) output

```
PC> ping 10.0.0.0

pinging 10.0.0.0 with 32 bytes of data:
Request timed out
   -11-
   -11-

Ping statistics for 10.0.0:
        Packets: Sent =4, Received =0, Lost =4 (100%

PC> ping 40.0.0.10

 pinging 40.0.0.10 with 32 bytes of data:
 Request Timed out
     -11-
     -11-

ping statistics for 40.0.0.10:
     Packets: Sent =4, Received =0, Loss =4 (100%
```

28/9/26