


How to configure DHCP within a LAN and Outside a LAN in a packet Tracer

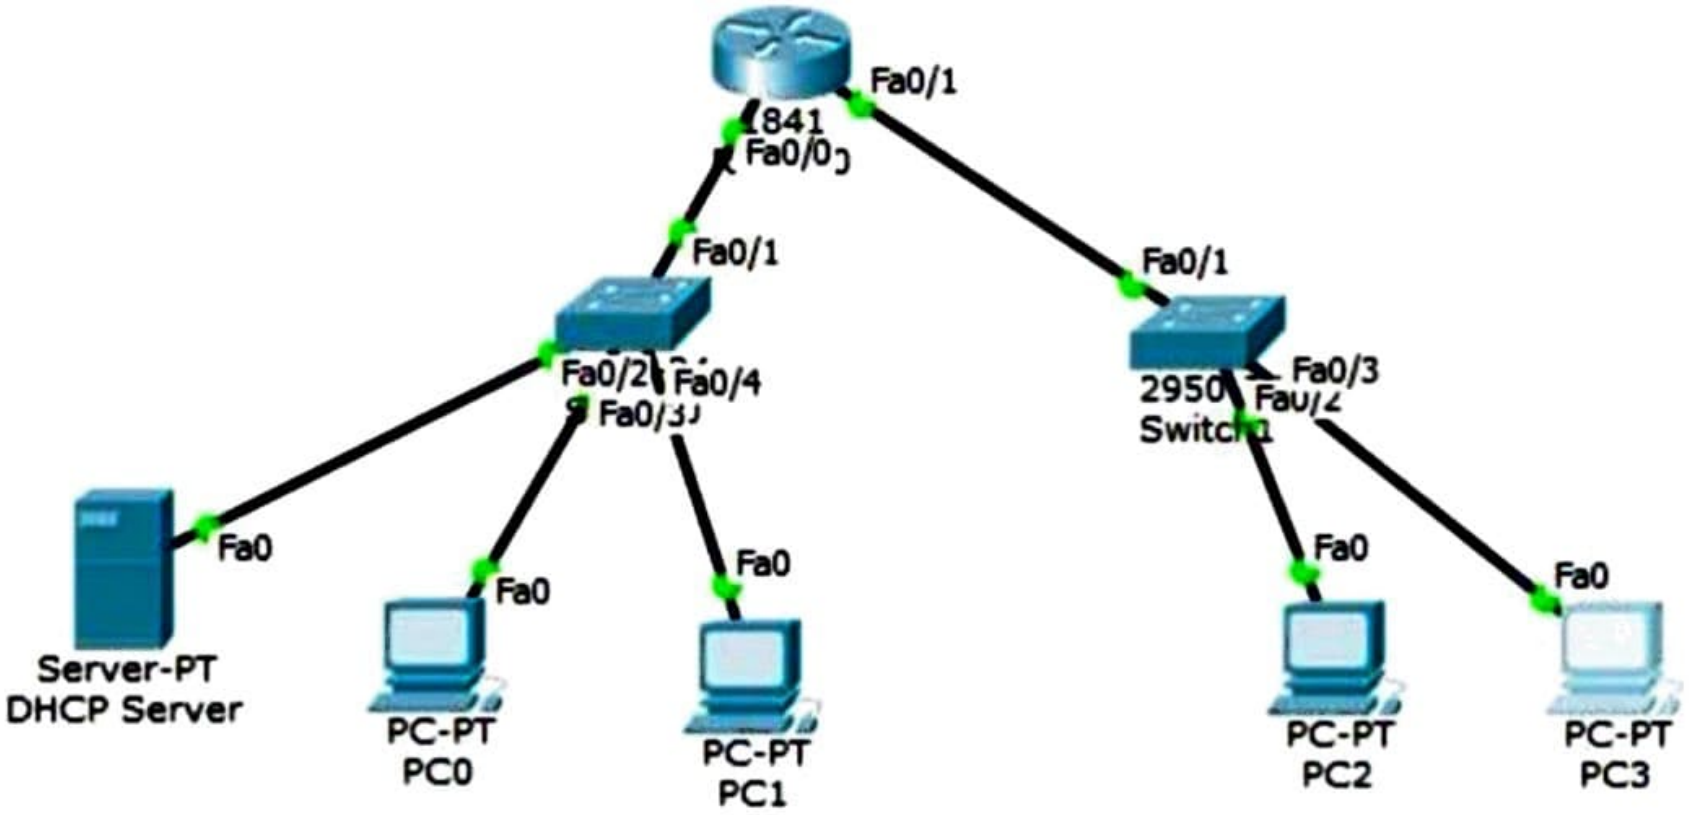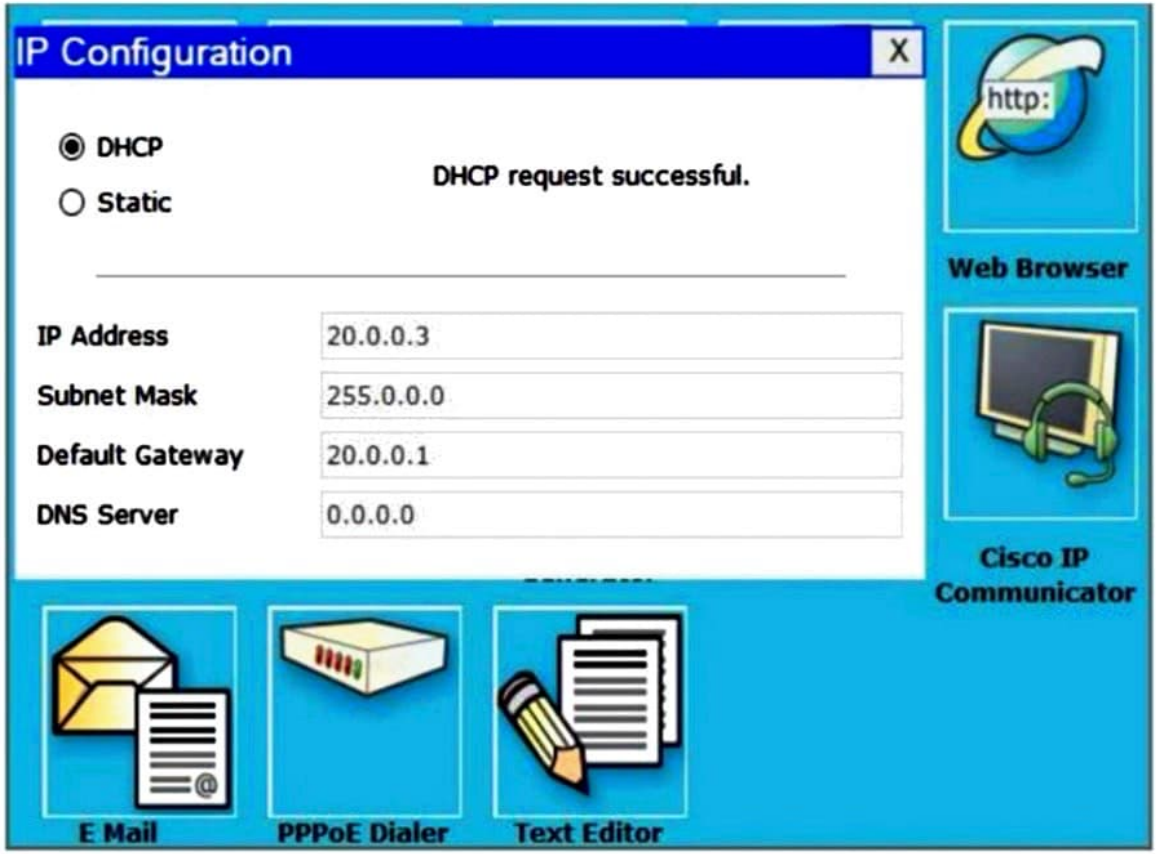


IP Configuration
X
DHCP
Static
DHCP request successful.
IP Address
20.0.0.3
Subnet Mask
255.0.0.0
Default Gateway
20.0.0.1
DNS Server
0.0.0.0
http:
Web Browser
Cisco IP Communicator
E Mail
PPPoE Dialer
Text Editor

3.) How to configure DHCP within a LAN in a packet tracer

→ Step 1: LAN

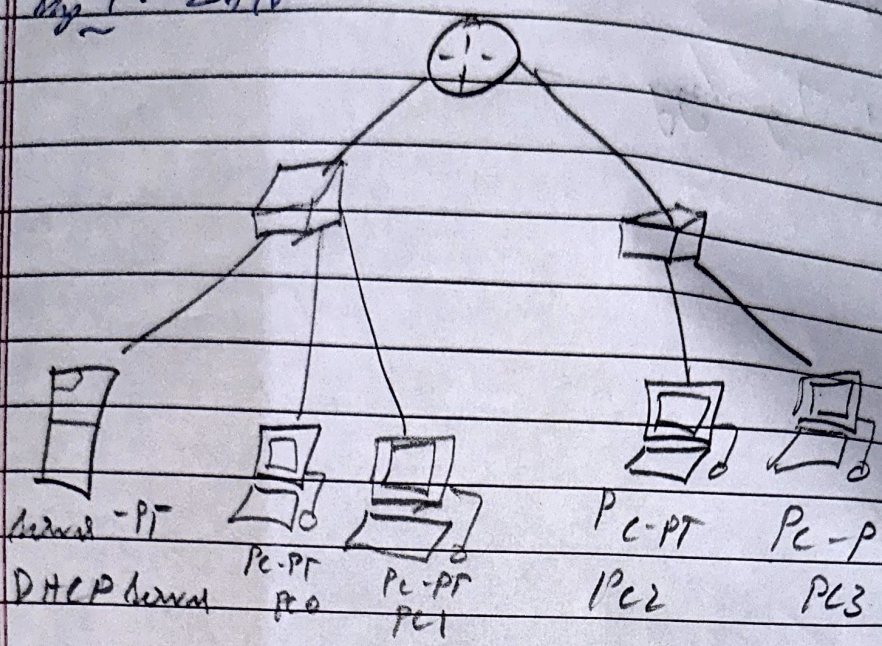

Step 2: click on DHCP server → Assign gateway

Step 3: Configure IP address as 10.0.0.2 & subnet mask

Step 4: Create a Server Pool for the two networks. Config - services - DHCP

Step 5: Configure Router through CLI. To help dhcp you have to add ip helper address as DHCP server address

Step 6 - Now select the Dhcp option in IP configuration of both IP's. observe within LAN & outside LAN.

Output

After testing connectivity,

Connection Tested : PC0 → PC1
Status : Successful

Connection Tested : PC0 → PC2
Status : Successful

9
31/10/26.