

How to Configure Static Route and Default Route to the Routers

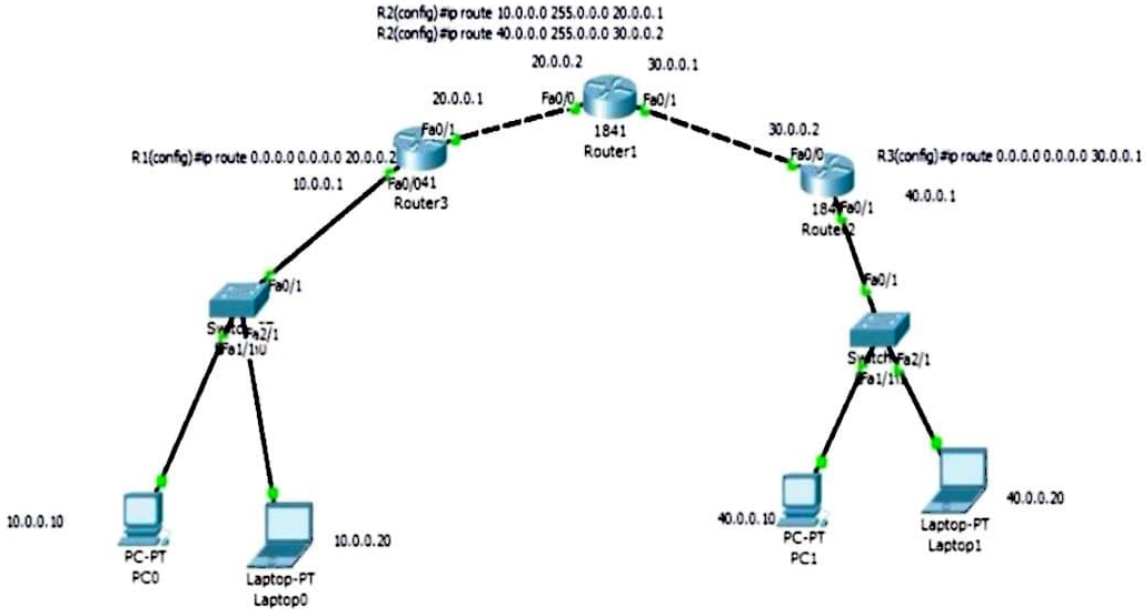


Output:

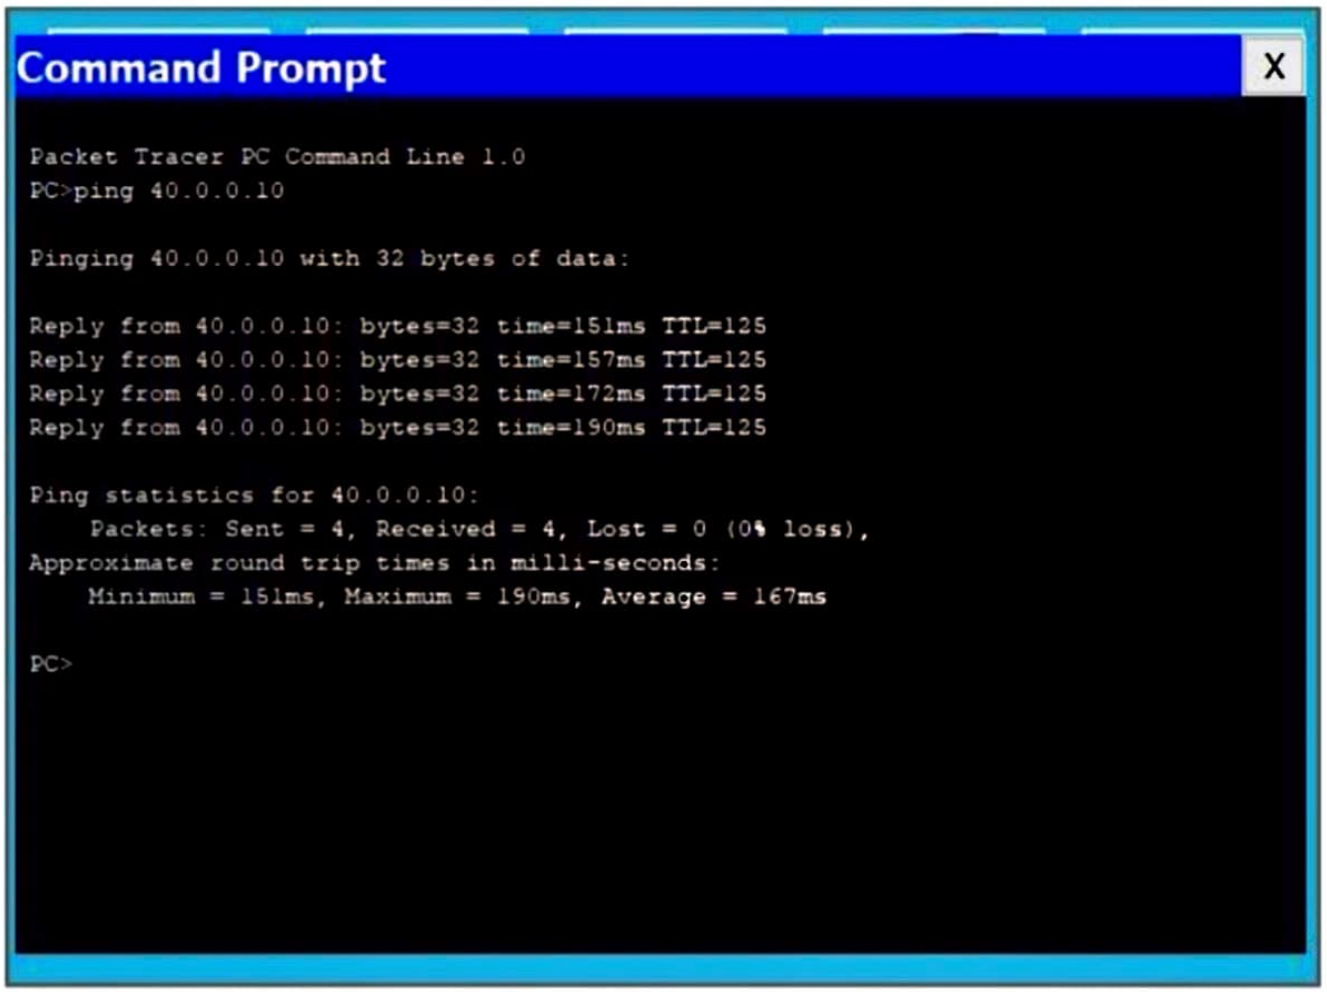

4) How to configure static route & Default route to the routers

→ Step 1: Topology

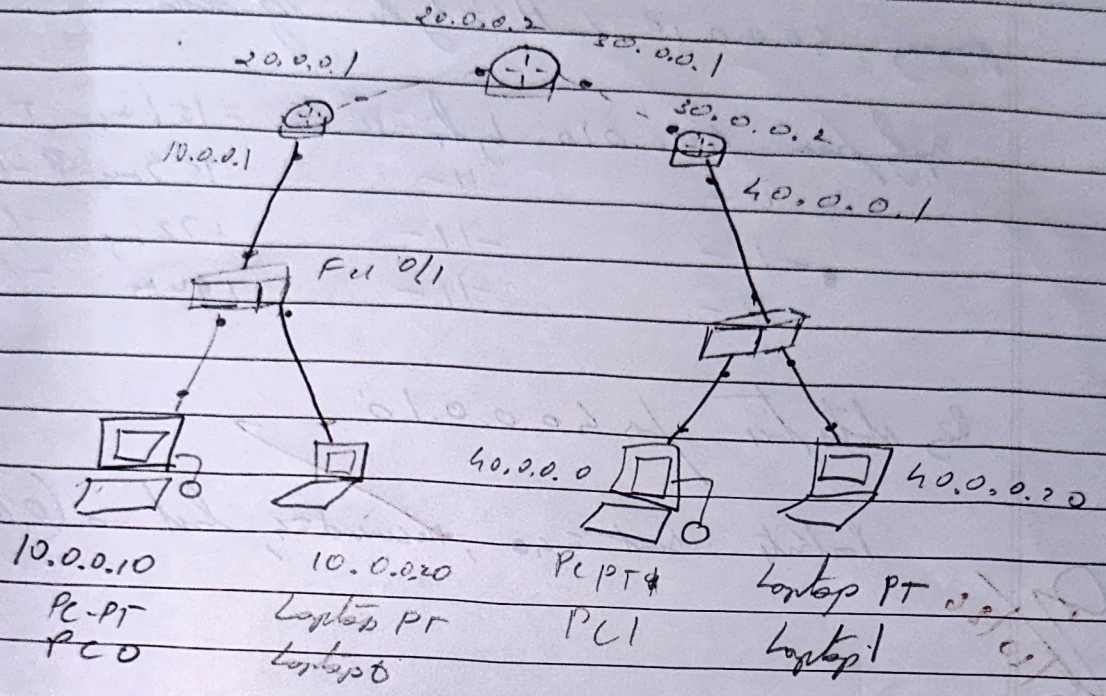

Step 2: Configure static route on R2 to route packets for 10.0.0.0 & 40.0.0.0 networks using the commands in CLI

Step 3: Now we are going to configure default route on R1 & R3. So the routers forward packets to assigned ip address next hop address.

Step 4: Now check the routing table of R1, R2, R3

Step 5: Now Ping from 10.0.0.10 to 40.0.0.10 in end & with PDU, you will get reply.

Output

pinging 40.0.0.10

pinging 40.0.0.10 with 32 bytes of data

Reply from 40.0.0.10: bytes=32 time=151ms TTL=
-11- -11- 157ms -11-
-11- -11- 172ms -11-
-11- -11- 190ms -11-

Ping statistics for 40.0.0.10:

Packets: Sent = 40, Received = 4, Lost = 0 (0% loss)

5/10/26