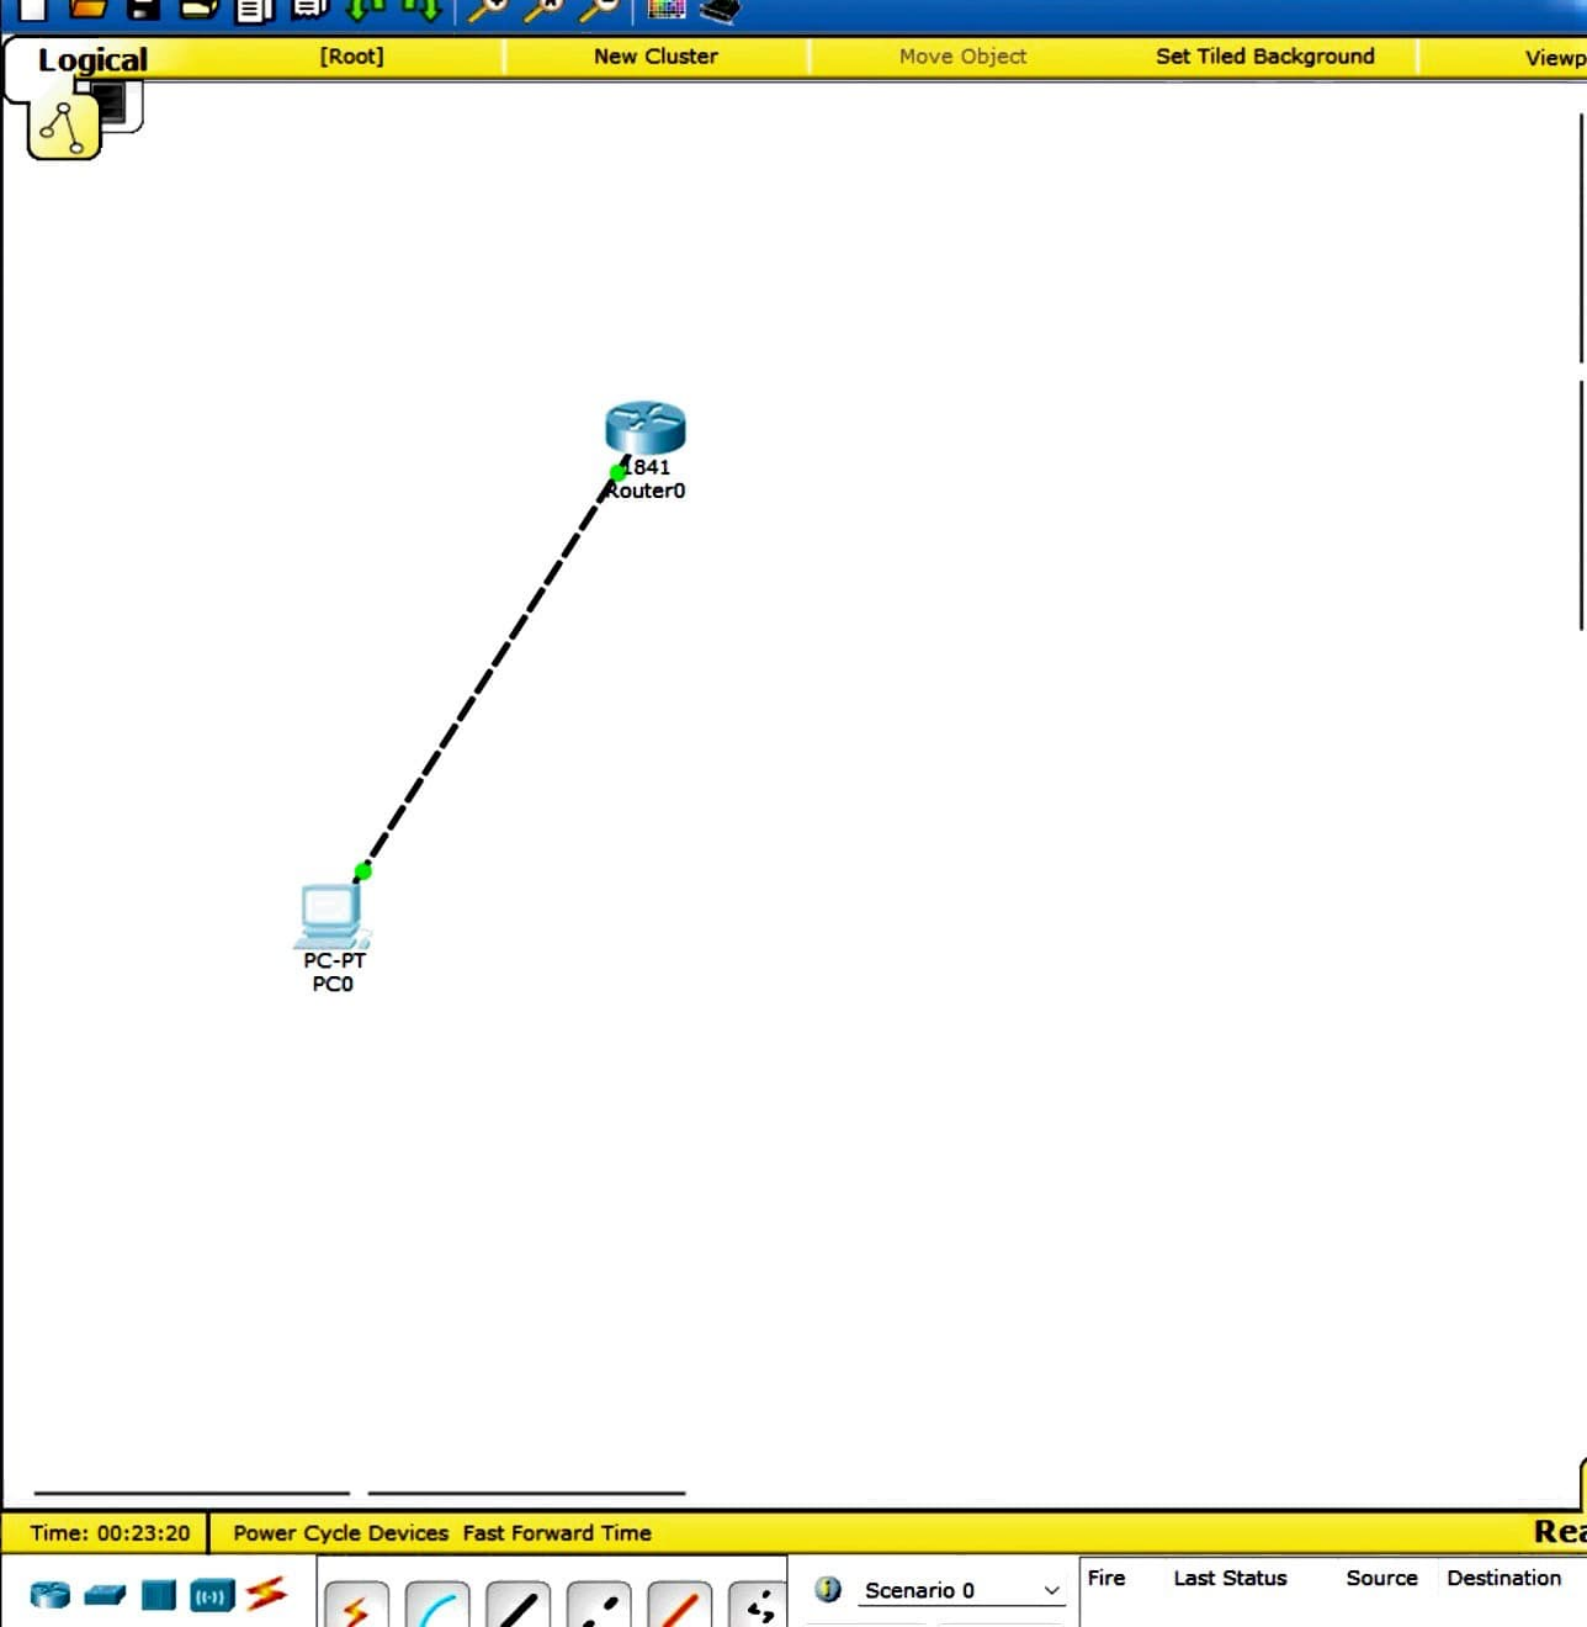

Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewp
1841
Router0
PC-PT
PC0
Time: 00:23:20
Power Cycle Devices
Fast Forward Time
Rea
Scenario 0
Fire
Last Status
Source
Destination

```
PC>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=0ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

PC>telnet 10.0.0.1
Trying 10.0.0.1 ...Open


User Access Verification

Password:
Router>show users
    Line       User       Host(s)              Idle       Location
   0 con 0                 idle                 00:07:18
*196 vty 0                 idle                 00:00:00 10.0.0.10

  Interface    User               Mode         Idle     Peer Address
Router>show ip interface brief
```

```
Interface              IP-Address      OK? Method Status
Protocol

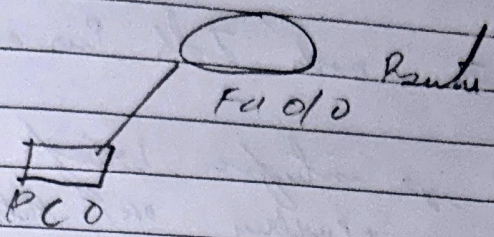
FastEthernet0/0        10.0.0.1        YES manual up                    up

FastEthernet0/1        unassigned      YES unset  administratively down down

Vlan1                  unassigned      YES unset  administratively down down
Router>
Router>
```

6.) understanding telnet

→ Topology



Step 1: create a topology like this

Step 2: configure the host with IP address & gateway

Step 3: configure the router interface with IP. Now configure the IP address for telnet access

Step 4: Enable Telnet by choosing cmd of PC0 ping the router, start telnet session

output

PC > telnet 10.0.0.1

Trying 10.0.0.1 . Open

User Access Verification

Password:

R1 > How many

Line	User	Host	Idle	Location
0 con 0		idle	00:03:4	
67 vty 0		idle	00:00:00	10.0.0.10

Interface use mode Idle Pwr address

R1> show ip interface brief

Interface	IP address	OK?	Method	Status	Protocol
Fast Ethernet 0/0	10.0.0.1	yes	manual	up	up
Fast Ethernet 0/1	unassigned	yes	unset	down	down
Vlan 1	unassigned	yes	unset	down	

R1>