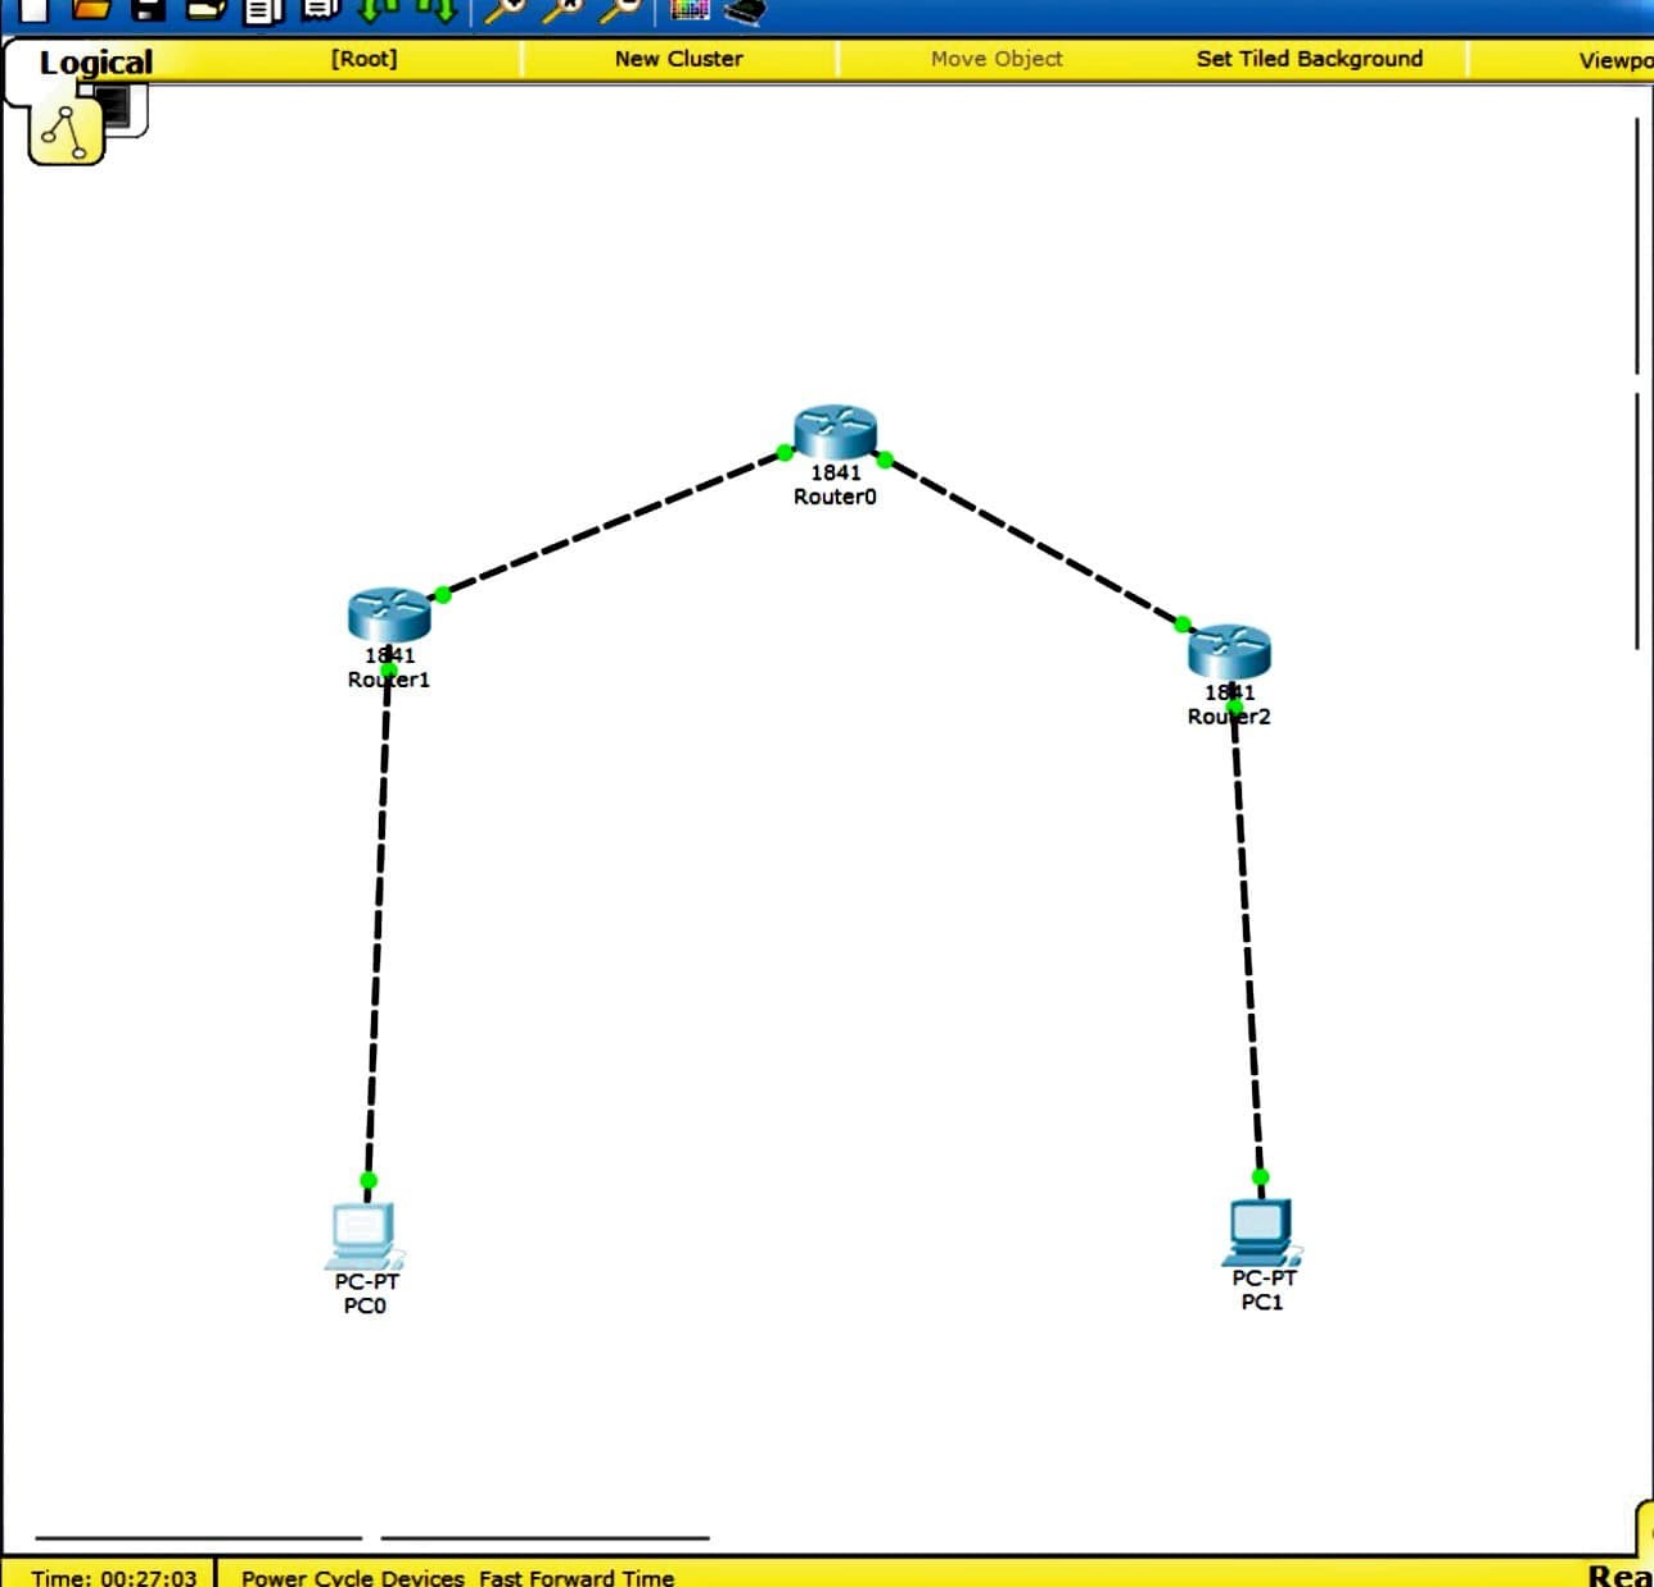
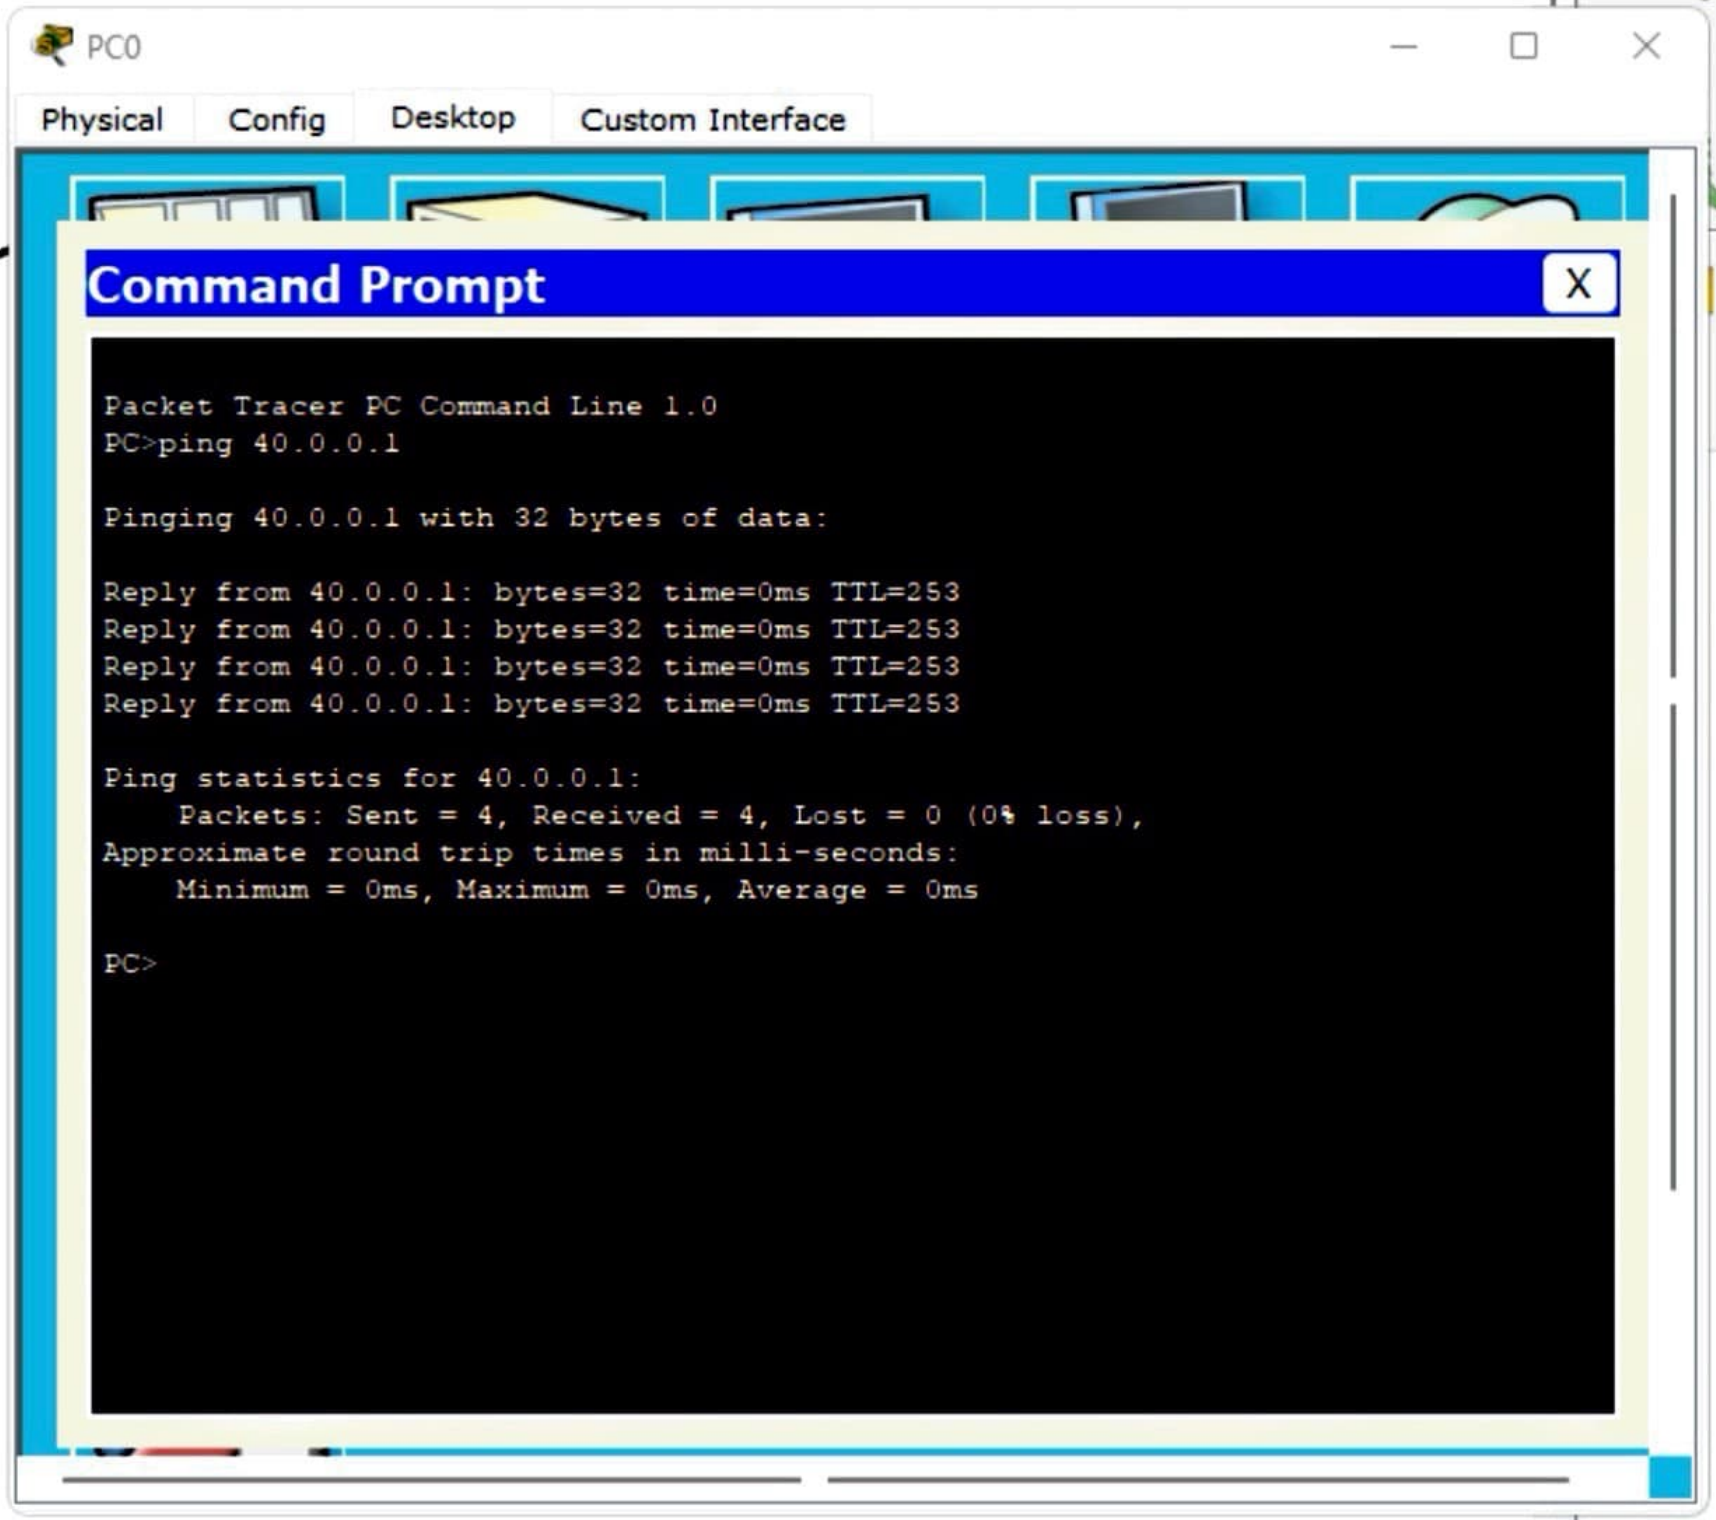
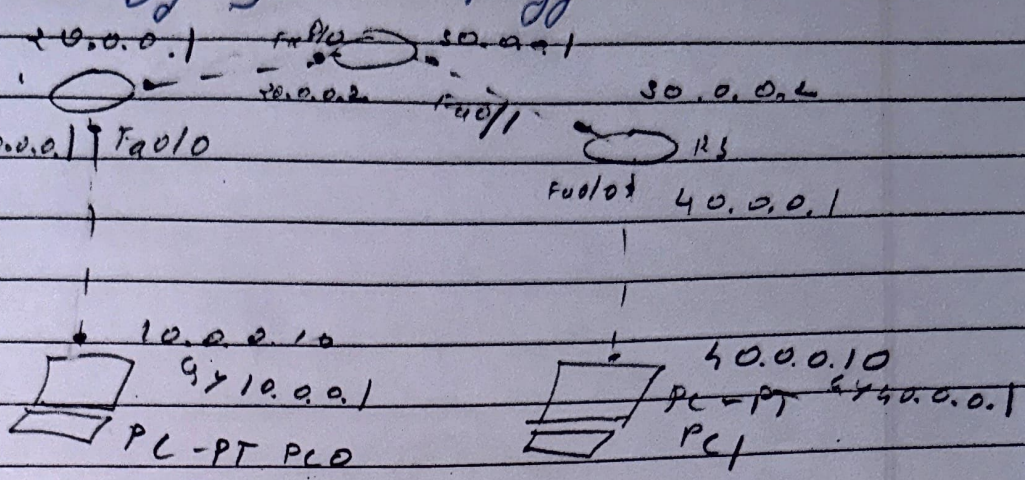

Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewpo
1841
Router0
1841
Router1
1841
Router2
PC-PT
PC0
PC-PT
PC1
Time: 00:27:03
Power Cycle Devices Fast Forward Time
Rea


PC0
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.1
Pinging 40.0.0.1 with 32 bytes of data:
Reply from 40.0.0.1: bytes=32 time=0ms TTL=253
Reply from 40.0.0.1: bytes=32 time=0ms TTL=253
Reply from 40.0.0.1: bytes=32 time=0ms TTL=253
Reply from 40.0.0.1: bytes=32 time=0ms TTL=253
Ping statistics for 40.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>

7.) Configure RIP routing protocol in Routers

→ ~~Ex~~ Topology

Step 1: Draw topology



Step 2: Configure ip address for all interfaces of all 3 routers & assign ip address, default gateway to hosts as in lab step 2

Step 3: Configure RIP to all routers R1, R2, R3 by using commands

Step 4: Now check routing table for router R1, R2, R3. Routers will have all network information in its routing table, router learnt this route by using rip. Routing table can be viewed by using command Router# show ip route

Output

ping 40.0.0.10
Reply from 40.0.0.10 bytes=32
Reply from 40.0.0.10 bytes=32
Reply from 40.0.0.10