CSA0717-Computer Networks

LAB MANUAL

EXPERIMENT-1

CONFIGURATION OF NETWORK COMPONENTS


Aim: To Study the following Network Devices in Detail

- PC
- Server
- Repeater
- Hub
- Switch

- Bridge
- Router
- Gate Way
- Transmission medium


Apparatus (Software): CISCO Packet tracer.

1. Node: In a communications ***network***, a ***network node*** is a connection point that can receive, create, store or send data along distributed ***network*** routes.

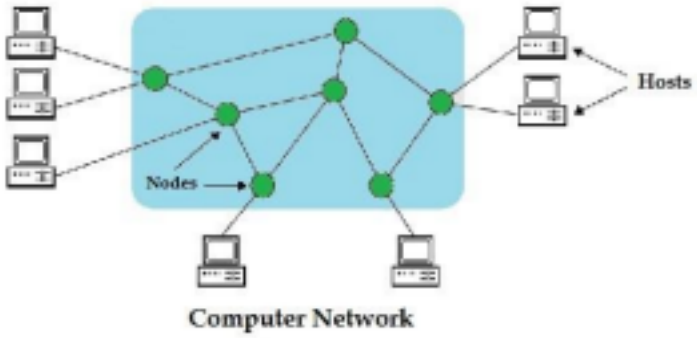

2. **Repeater:** Functioning at Physical Layer.


A **repeater** is an electronic device that receives a signal and retransmits it at a higher level and/or higher power, or onto the other side of an obstruction, so that the signal can cover longer distances.

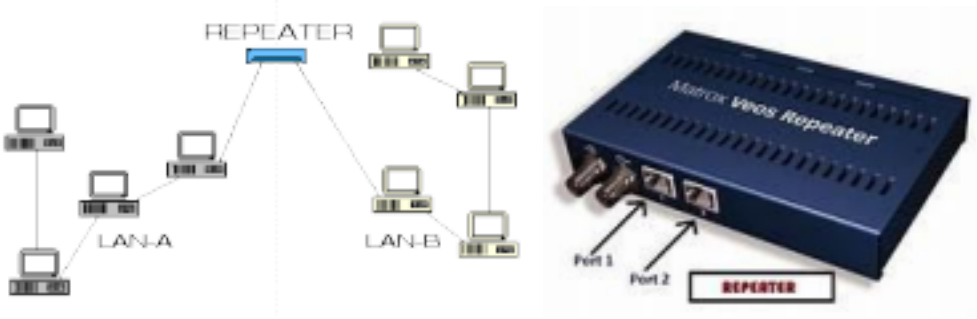

3. Hub: Ethernet hub, **active hub**, **network hub**, **repeater hub**

Hub or concentrator is a device for connecting multiple twisted pair or fiber optic Ethernet devices together and making them act as a single network segment. Hubs work at the physical layer (layer 1) of the OSI model. The device is a form of multiport repeater. Repeater hubs also participate in collision detection, forwarding a jam signal to


all ports if it detects a collision.

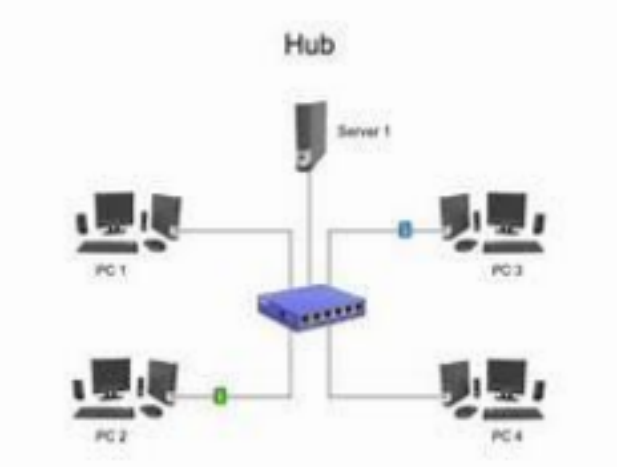



4. **Switch:** A **network switch** or **switching hub** is a computer networking device that connects network segments. The term commonly refers to a network bridge that processes and routes data at the data link layer (layer 2) of the OSI model. Switches that additionally process data at the network layer (layer 3 and above) are often referred to as Layer 3 switches or multilayer switches.




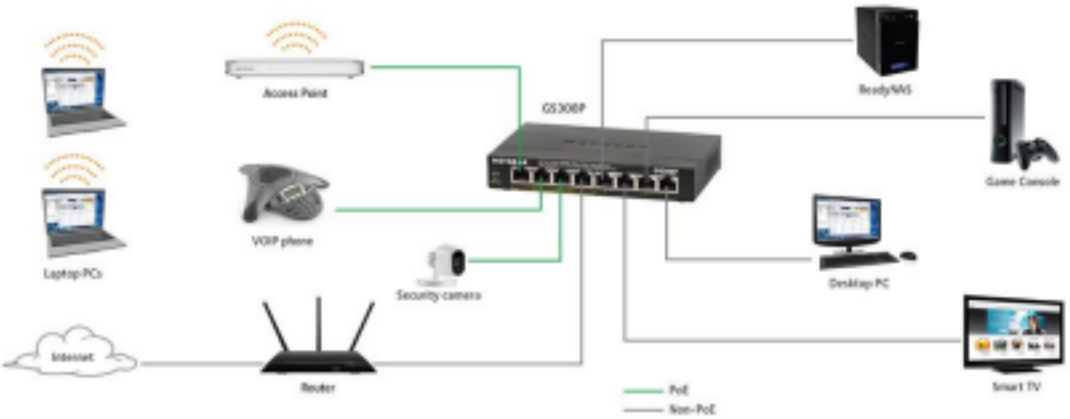

5. **Bridge:** A **network bridge** connects multiple network segments at the data link layer (Layer 2) of the OSI model. In Ethernet networks, the term bridge formally means a device that behaves according to the IEEE 802.1D standard. A bridge and switch are very much alike; a switch being a bridge with numerous ports. Switch or Layer 2 switch

is often used interchangeably with bridge. Bridges can analyze incoming data packets to determine if the bridge is able to send the given packet to another segment of the network.



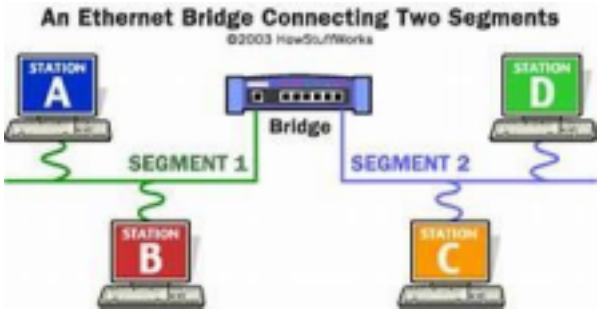

6. **Router:** A **router** is an electronic device that interconnects two or more computer networks, and selectively interchanges packets of data between them. Each data packet contains address information that a router can use to determine if the source and destination are on the same network, or if the data packet must be transferred from one network to another. The multiple routers are used in a large collection of interconnected networks, the routers exchange information about target system addresses, so that each router can build up a table showing the preferred paths between any two systems on the interconnected networks.






7. **Gate Way:** In a communication network, a network node equipped for interfacing with another network that uses different protocols. A gateway may contain devices such as protocol translators, impedance matching devices, rate converters, fault isolators, or signal translators as necessary to provide system interoperability. It also requires the establishment of mutually acceptable administrative procedures between both networks.


   - A protocol translation/mapping gateway interconnects networks with different network protocol technologies by performing the required protocol conversions.



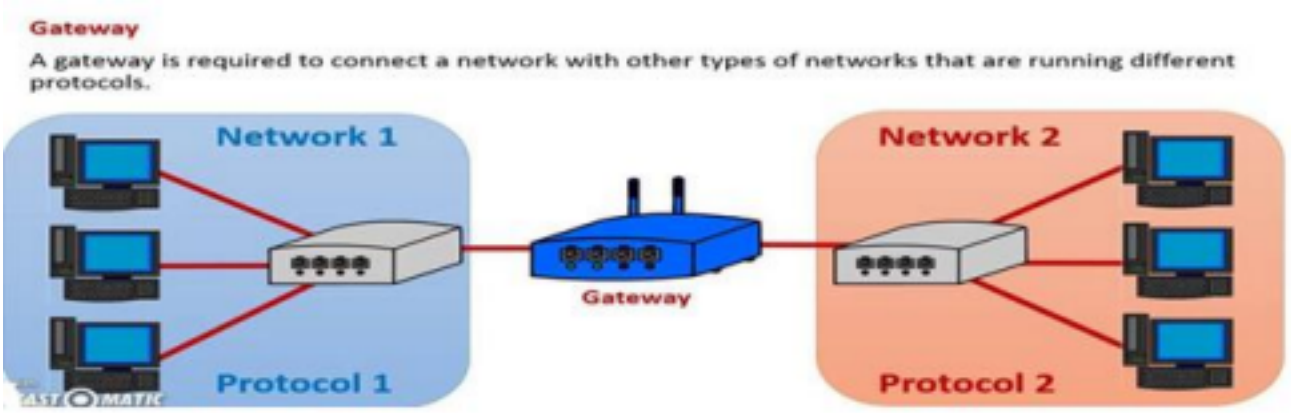


8. Server: A server is a type of computer or device on a network that manages network resources. Servers are often dedicated, meaning that they perform no other tasks besides their server tasks. On multiprocessing operating systems, however, a single computer can execute several programs at once. A server in this case could refer to the

program that is managing resources rather than the entire computer.

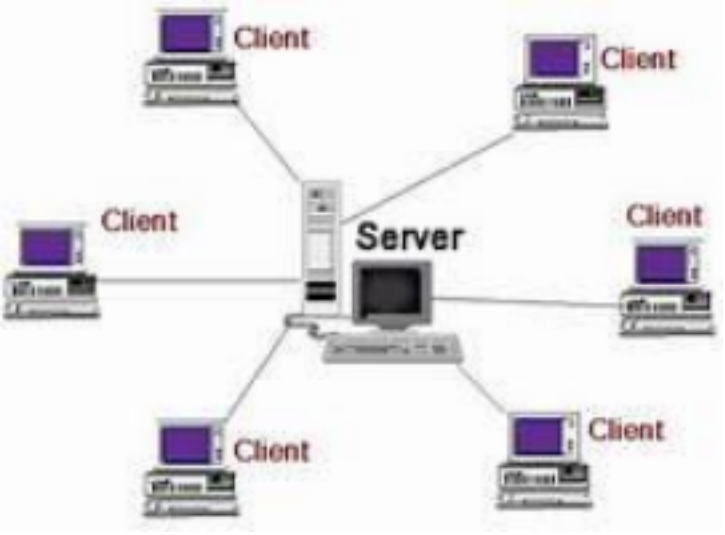

9. **Transmission media**: The medium through which the signals travel from one device to another. These are classified as guided and unguided. Guided media are those that provide a conduit from one device to another. Eg. Twisted pair, coaxial cable etc. Unguided media transport signals without using physical cables. Eg. Air.



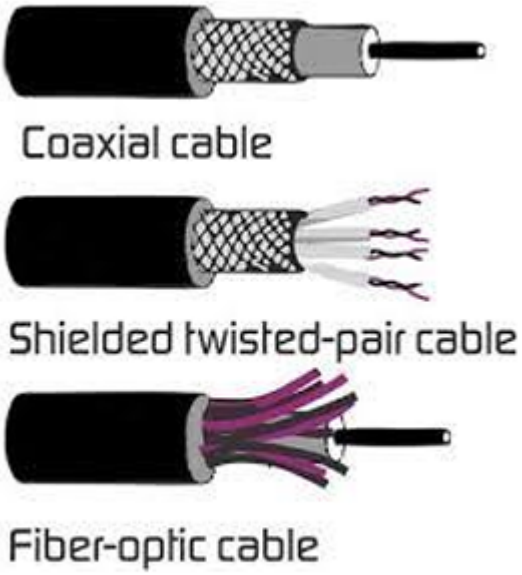

Result: Thus the network components are studied in detail.

Date:

EXPERIMENT-2

IMPLEMENTATION OF STAR TOPOLOGY USING PACKET TRACER

Aim: To Implement a star topology using packet tracer and hence to transmit data between the devices connected using star topology.

Software/Apparatus required: Packet Tracer/End devices, bridge, connectors.

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device.

Step 4: Building the Topology – Connecting the Hosts to Switches

Select a switch, by clicking once on **Switches** and once on a **2950-24** switch. Add the switch by moving the plus sign "+"

Step 5: Connect PCs to switch by first choosing Connections

Click once on the **Copper Straight-through** cable

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Switch0**

Click once on **Switch0**

Notice the green link lights on **PC** Ethernet NIC and amber light **Switch port**. The switch port is temporarily not forwarding frames, while it goes through the stages for the Spanning Tree Protocol (STP) process. After about 30 seconds the amber light will change to green indicating that the port has entered the forwarding stage. Frames can now forwarded out the switch port.

Step 6: Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be Configured on the devices. Click once on PC0. Choose the Config tab and click on FastEthernet0. Type the IP address in its field. Click on the subnet mask it will be generated automatically.


Step 7: To confirm Data transfer between the devices

Click on the node. Select desktop option and then command prompt. Once the window


pops up, ping the IP address of the device to which node0 is connected. Ping statistics will be

displayed.

Diagram:

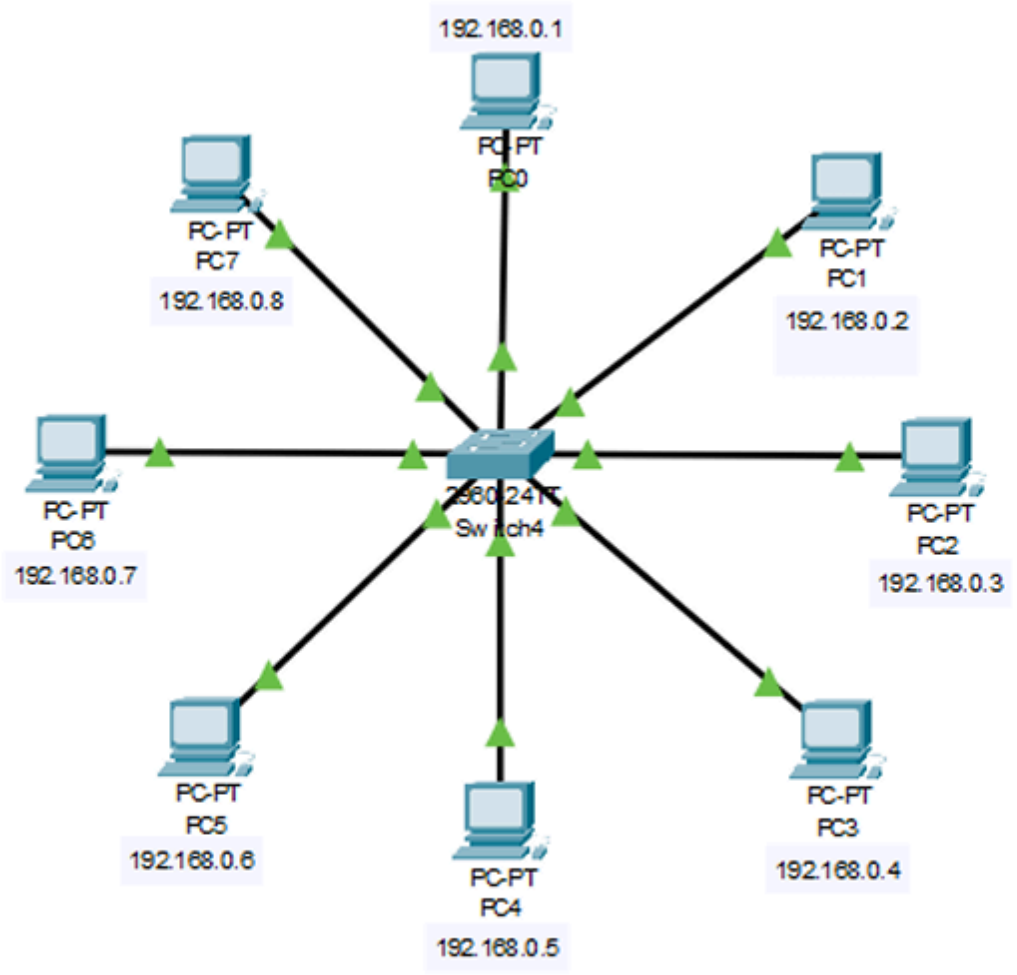
192.168.0.1
PC-PT
PC0
PC-PT
PC7
192.168.0.8
PC-PT
PC1
192.168.0.2
PC-PT
PC6
192.168.0.7
Switch4
PC-PT
PC2
192.168.0.3
PC-PT
PC5
192.168.0.6
PC-PT
PC4
192.168.0.5
PC-PT
PC3
192.168.0.4

Output:

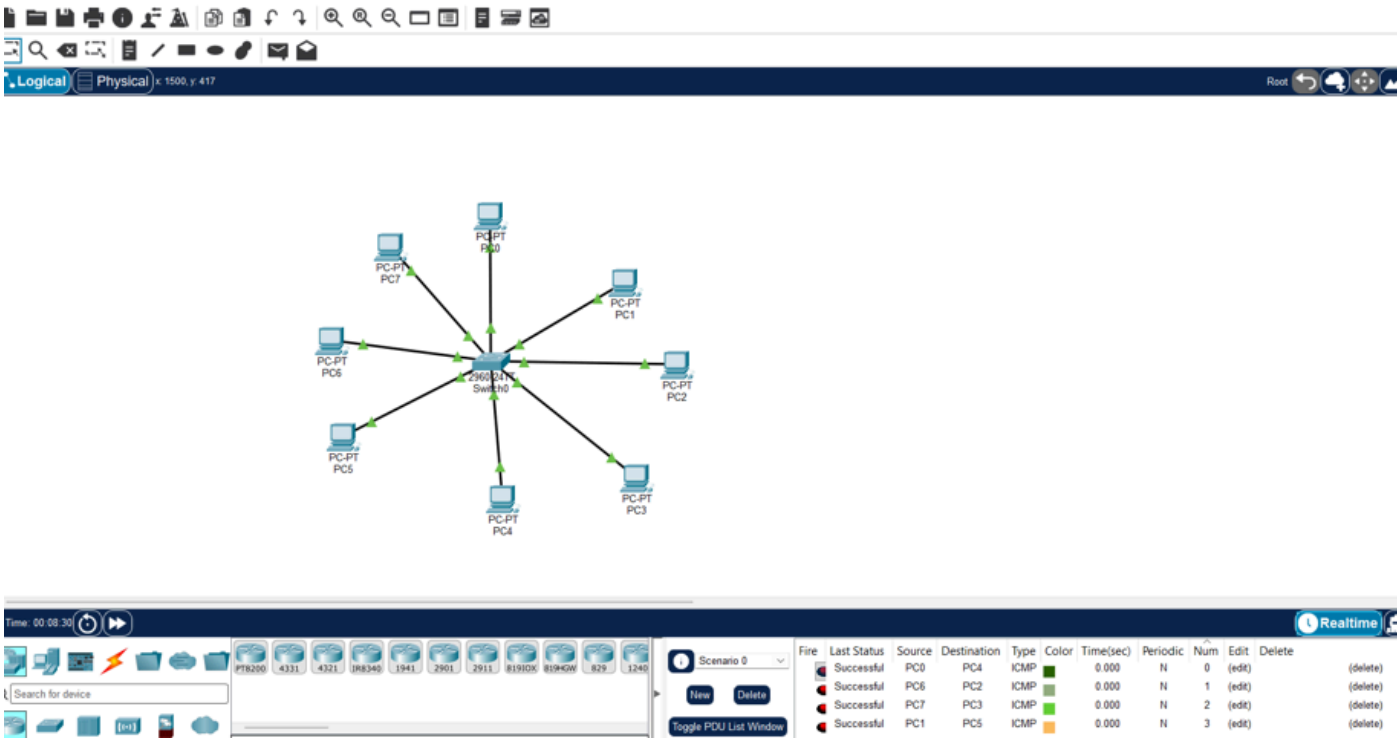

Result: Thus the Star topology is implemented with Packet Tracer simulation Tool.

Date:

EXPERIMENT-3

IMPLEMENTATION OF BUS TOPOLOGY USING PACKET TRACER

Aim: To Implement a Bus topology using packet tracer and hence to transmit data between the devices connected using Bus topology.

Software / Apparatus required: Packet Tracer / End devices, Hubs, connectors.

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device.

Step 4: Building the Topology – Connecting the Hosts to Switches Select a switch, by clicking once on **Switches** and once on a **2950-24** switch. Add the switch by moving the plus sign "+"

Step 5: Connect PCs to switch by first choosing connections

Click once on the **Copper Straight-through** cable

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Switch0**

Click once on **Switch0**

Notice the green link lights on **PC** Ethernet NIC and amber light **Switch port**. The switch port is temporarily not forwarding frames, while it goes through the stages for the Spanning Tree Protocol (STP) process. After about 30 seconds the amber light will change to green indicating that the port has entered the forwarding stage. Frames can now forward out the switch port.


Step 6: Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be configured on the devices. Click once on PC0. Choose the Config tab and click on FastEthernet0. Type the IP address in its field. Click on the subnet mask it will be generated automatically.


Step 7: To confirm Data transfer between the devices

Click on the node. Select desktop option and then command prompt. Once the window pops up, ping the IP address of the device to which node0 is connected. Ping statistics will be displayed.

Diagram:

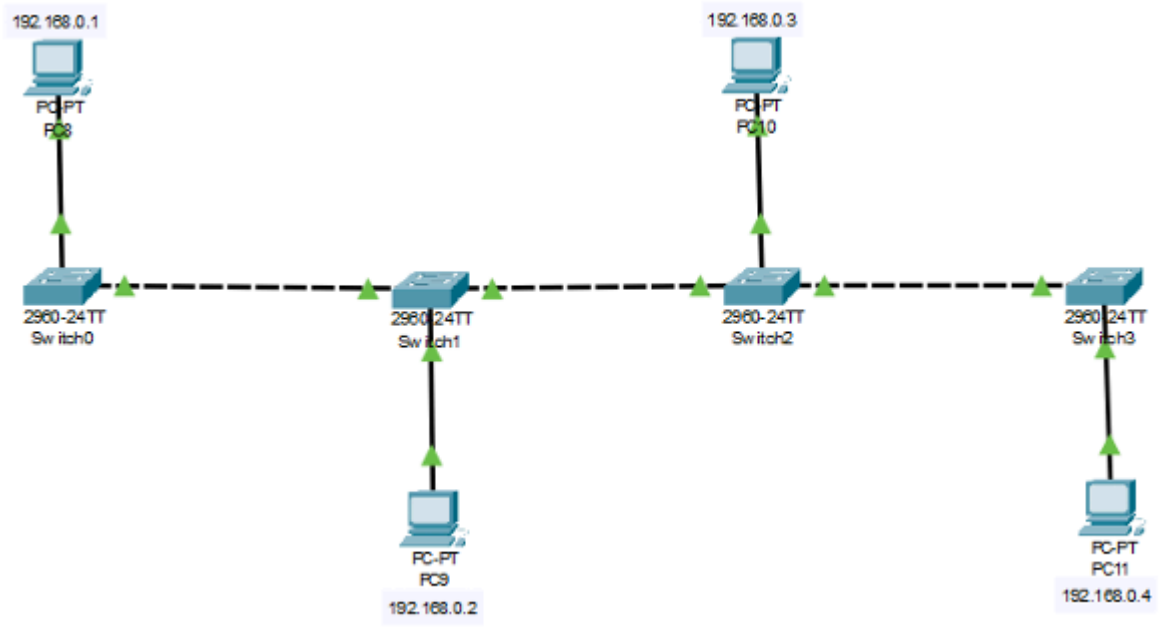

Output:

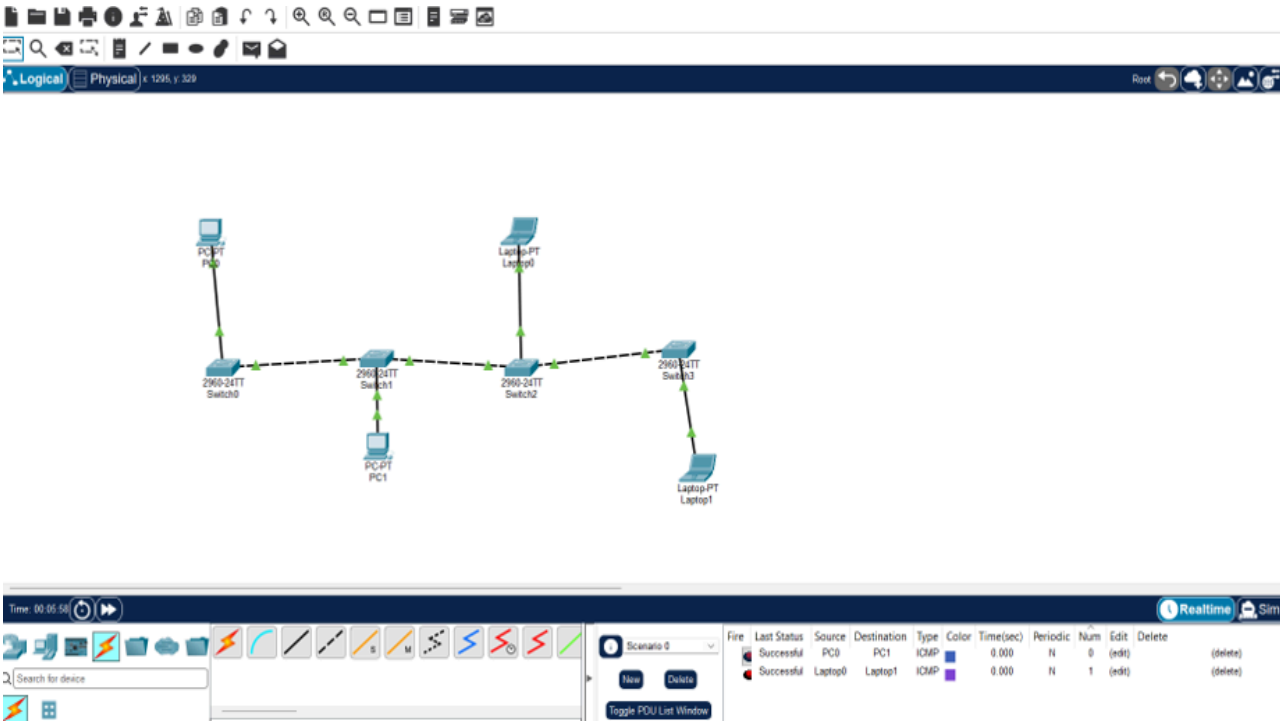

Result: Thus the Bus topology is implemented with Packet Tracer simulation Tool.

Date:

EXPERIMENT-4

IMPLEMENTATION OF RING TOPOLOGY USING PACKET TRACER

Aim: To Implement a Ring topology using packet tracer and hence to transmit data between the devices connected using Ring topology.

Software / Apparatus required: Packet Tracer / End devices, Hubs, Connectors.

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device.

Step 4: Building the Topology – Connecting the Hosts to Switches Select a switch, by clicking once on **Switches** and once on a **2950-24** switch. Add the switch by moving the plus sign "+"

Step 5: Connect PCs to switch by first choosing connections

Click once on the **Copper Straight-through** cable

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Switch0**

Click once on **Switch0**

Notice the green link lights on **PC** Ethernet NIC and amber light **Switch port**. The

switch port is temporarily not forwarding frames, while it goes through the stages for the Spanning Tree Protocol (STP) process. After about 30 seconds the amber light will change to green indicating that the port has entered the forwarding stage. Frames can now forward out the switch port.


Step 6: Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be configured on the devices. Click once on PC0. Choose the Config tab and click on FastEthernet0. Type the IP address in its field. Click on the subnet mask it will be generated automatically.


Step 7: To confirm Data transfer between the devices

Click on the node. Select desktop option and then command prompt. Once the window pops up, ping the IP address of the device to which node0 is connected. Ping statistics will be displayed.

Diagram:

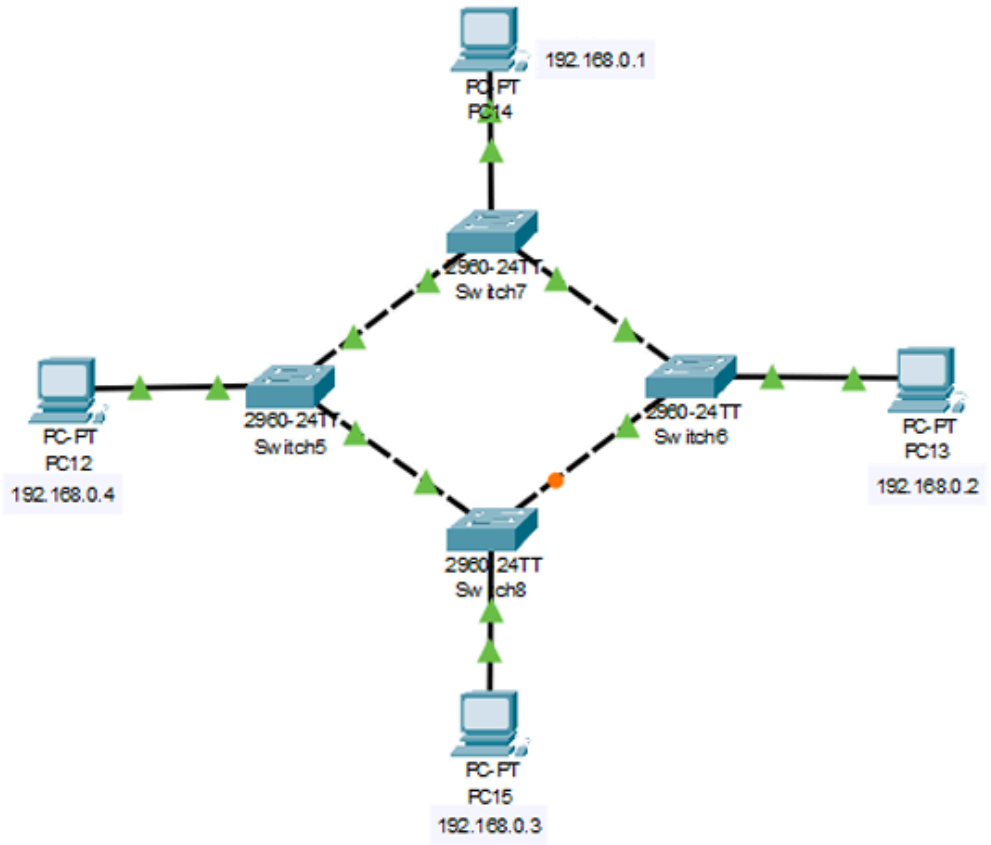

Output

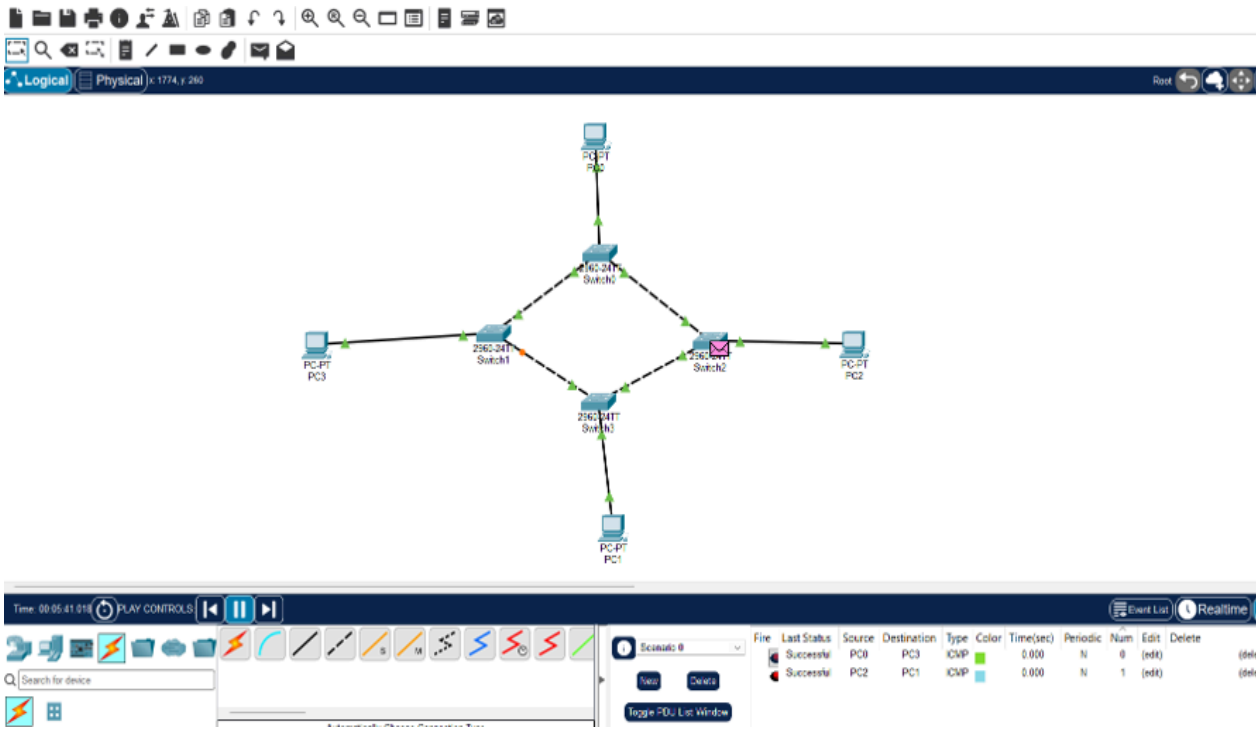

Result: Thus the Ring topology is implemented with Packet Tracer simulation Tool.

Date:

EXPERIMENT-5

IMPLEMENTATION OF MESH TOPOLOGY USING PACKET TRACER

Aim: To Implement a Mesh topology using packet tracer and hence to transmit data between the devices connected using Mesh topology.

Software / Apparatus required: Packet Tracer / End devices, Hubs, Connectors.

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device.

Step 4: Building the Topology – Connecting the Hosts to Switches Select a switch, by clicking once on **Switches** and once on a **2950-24** switch. Add the switch by moving the plus sign "+"

Step 5: Connect PCs to switch by first choosing connections

Click once on the **Copper Straight-through** cable

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Switch0**

Click once on **Switch0**

Notice the green link lights on **PC** Ethernet NIC and amber light **Switch port**. The switch port is temporarily not forwarding frames, while it goes through the stages for the Spanning Tree Protocol (STP) process. After about 30 seconds the amber light will change to green indicating that the port has entered the forwarding stage. Frames can now forward out the switch port.


Step 6: Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be configured on the devices. Click once on PC0. Choose the Config tab and click on FastEthernet0. Type the IP address in its field. Click on the subnet mask it will be generated automatically.


Step 7: To confirm Data transfer between the devices

Click on the node. Select desktop option and then command prompt. Once the window pops up, ping the IP address of the device to which node0 is connected. Ping statistic will be displayed.

Diagram:

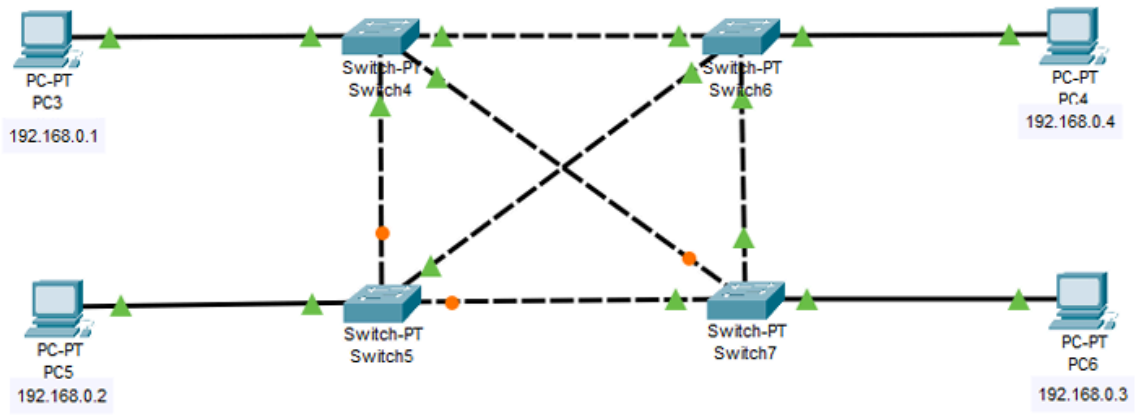

Output:

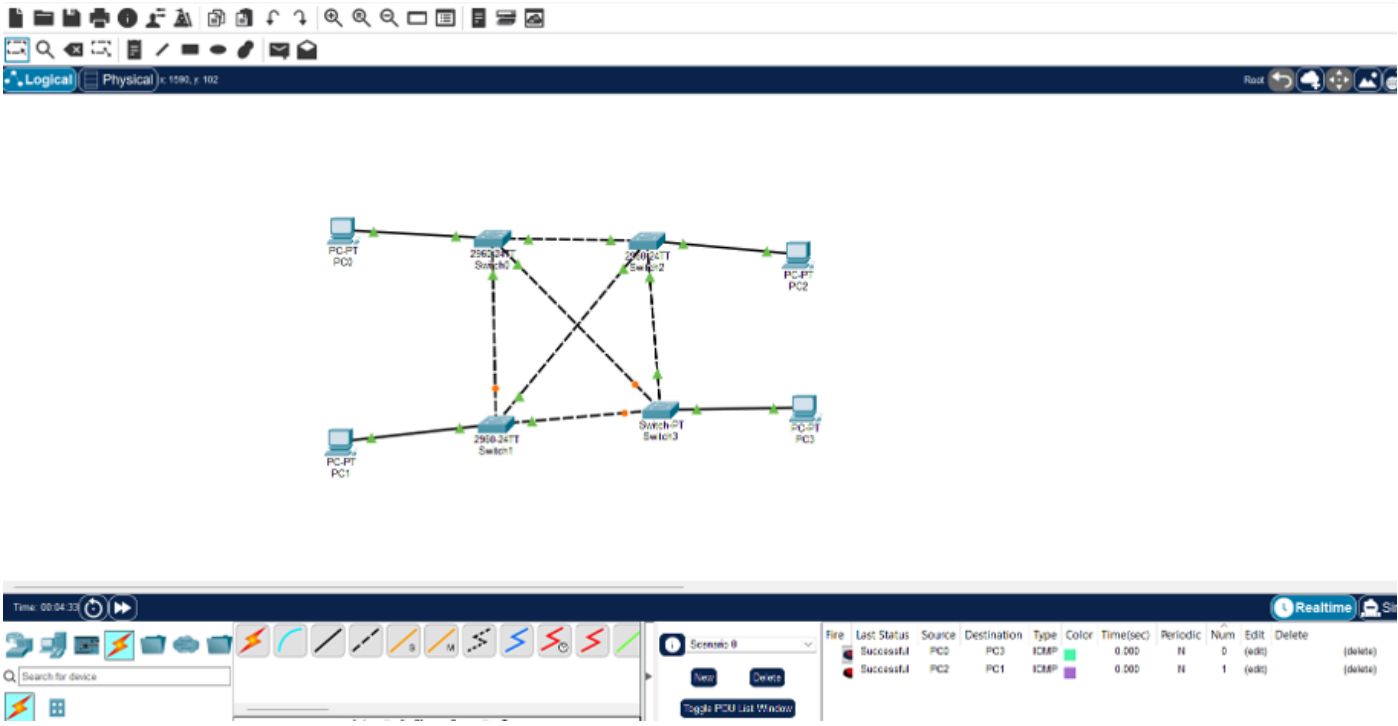

Result: Thus the Mesh topology is implemented with Packet Tracer simulation Tool.

Date:

EXPERIMENT-6

IMPLEMENTATION OF TREE TOPOLOGY USING PACKET TRACER

Aim: To Implement a tree topology using packet tracer and hence to transmit data between the devices connected using tree topology.

Software / Apparatus required: Packet Tracer / End devices, Hubs, connectors.

Procedure:

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device.

Step 4: Building the Star Topology – Connecting the Hosts to Hubs Select a Hub, by clicking once on **Hub** and once on a **generic Hub** Add the Hub by moving the plus sign "+"

Step 5: Connect PCs to Hub by first choosing Connections

Click once on the **Automatic cable selector**

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Hub0**

Click once on **Hub0**

Proceeding in this way create three star topologies

Step 6: Building the Tree Topology – Connecting the Hubs to Active Hub

Connect the hubs of star topologies to active hub to create tree topology. **Step 7:**

Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be configured on the devices. Click once on PC0. Choose the Config tab and click on Fast Ethernet0. Type the IP address in its field. Click on the subnet mask. It will be generated automatically.

Step 8: Verifying Connectivity in Real time Mode

Be sure you are in **Real time** mode.

Select the **Add Simple PDU** tool used to ping devices.

Click once on PC0, then once on PC3.

The PDU **Last Status** should show as **Successful**.

Step 9: **Verifying Connectivity in Simulation Mode**

Be sure you are in **Simulation** mode.


Deselect all filters (All/None) and select only **ICMP**.

Select the **Add Simple PDU** tool used to ping devices


Click once on PC0, then once on PC3.

Continue clicking **Capture/Forward** button until the ICMP ping is completed. You should see the ICMP messages move between the hosts, hub and switch. The PDU **last status** should show as **Successful**.

Diagram:

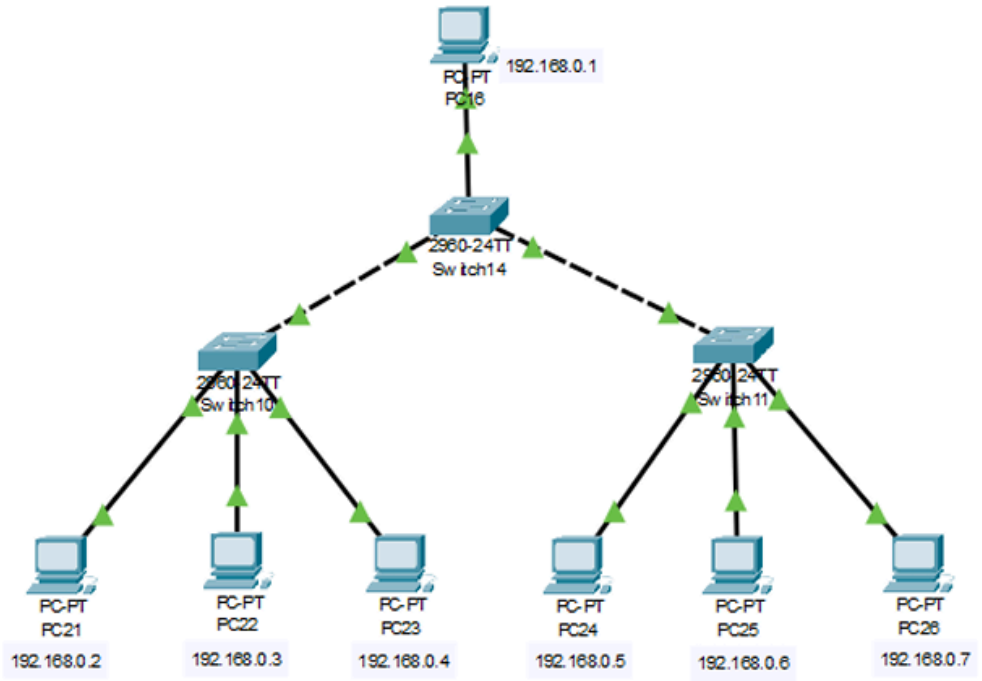

Output:

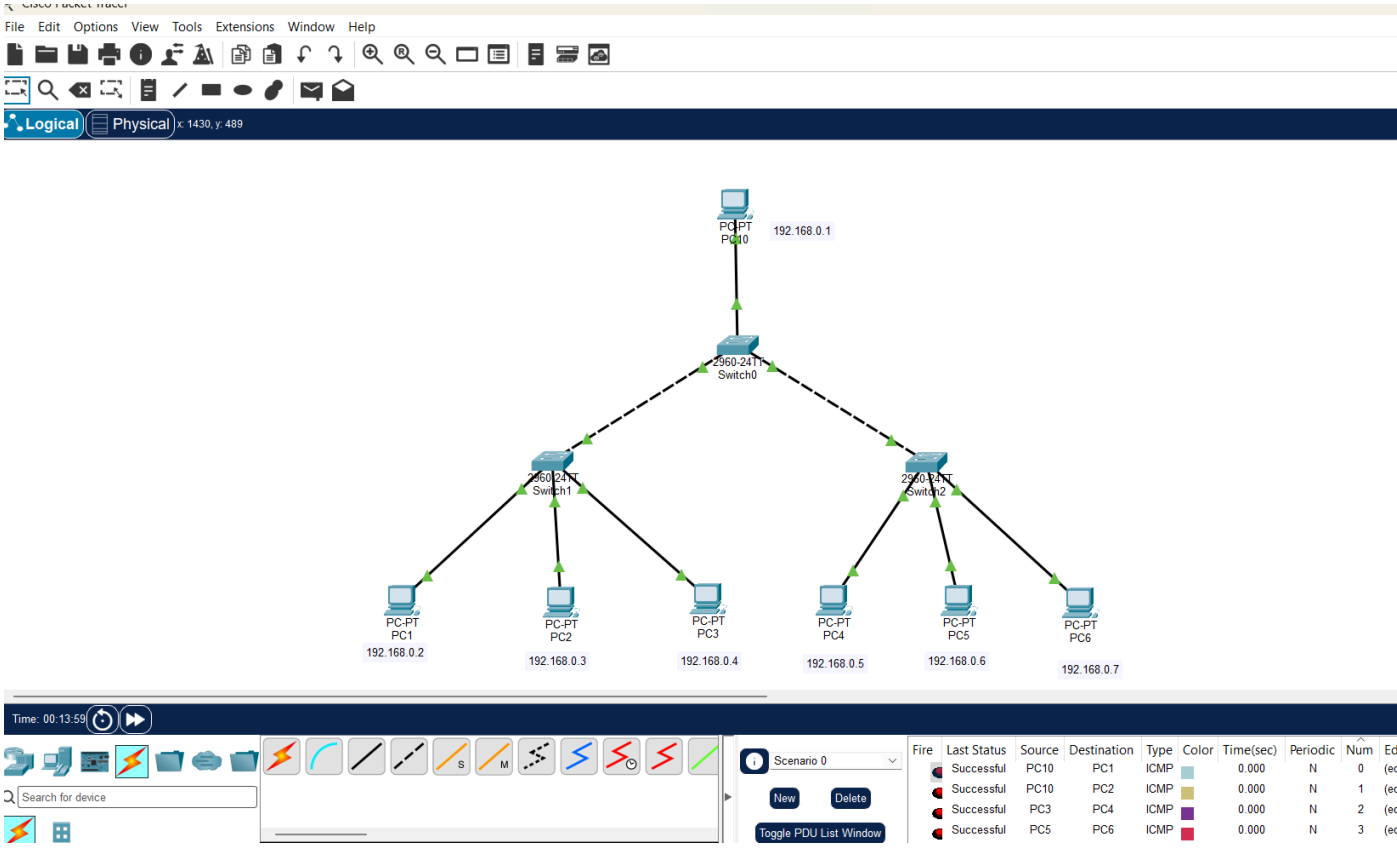

Result: Thus the Tree topology is implemented with Packet Tracer simulation Tool.

EXPERIMENT-7

IMPLEMENTATION OF HYBRID TOPOLOGY (BUS AND RING TOPOLOGY) USING PACKET TRACER

Aim: To Implement a hybrid topology using packet tracer and hence to transmit data between the devices connected using tree topology.

Software / Apparatus required: Packet Tracer / End devices, Hubs, connectors.

Steps for building topology:

Step 1: Start Packet Tracer

Step 2: Choosing Devices and Connections

Step 3: Building the Topology – Adding Hosts

Single click on the **End Devices**.

Single click on the **Generic** host.

Move the cursor into topology area.

Single click in the topology area and it copies the device. **Step 4: Building the Bus Topology – Connecting the Hosts to Hubs** Select a Hub, by clicking once on **Hub** and once on a **generic Hub** Add the Hub by moving the plus sign "+"

Step 5: Building the Ring Topology – Connecting the Hosts to Hubs

Select a Hub, by clicking once on **Hub** and once on a **generic Hub** Add the Hub by moving the plus sign "+"

Step 5: Connect PCs to Hub by first choosing Connections

Click once on the **Automatic cable selector**

Click once on **PC2**

Choose **Fast Ethernet**

Drag the cursor to **Hub0**

Click once on **Hub0**

Proceeding in this way create three Bus topologies

Step 6: Building the Tree Topology – Connecting the Hubs to Active Hub

Connect the hubs of star topologies to active hub to create tree topology. **Step 7:**

Configuring IP Addresses and Subnet Masks on the Hosts

To start communication between the hosts IP Addresses and Subnet Masks had to be configured on the devices. Click once on PC0. Choose the Config tab and click on FastEthernet0. Type the IP address in its field. Click on the subnet mask. It will be Generated automatically.

Step 8: Verifying Connectivity in Realtime Mode

Be sure you are in **Realtime** mode.

Select the **Add Simple PDU** tool used to ping devices.

Click once on PC0, then once on PC3.

The PDU **Last Status** should show as **Successful**.

Step 9: **Verifying Connectivity in Simulation Mode**

Be sure you are in **Simulation** mode.


Deselect all filters (All/None) and select only **ICMP**.

Select the **Add Simple PDU** tool used to ping devices


Click once on PC0, then once on PC3.

Continue clicking **Capture/Forward** button until the ICMP ping is completed. The ICMP messages move between the hosts, hub and switch. The PDU **Last Status** should show as **Successful**.

Diagram:

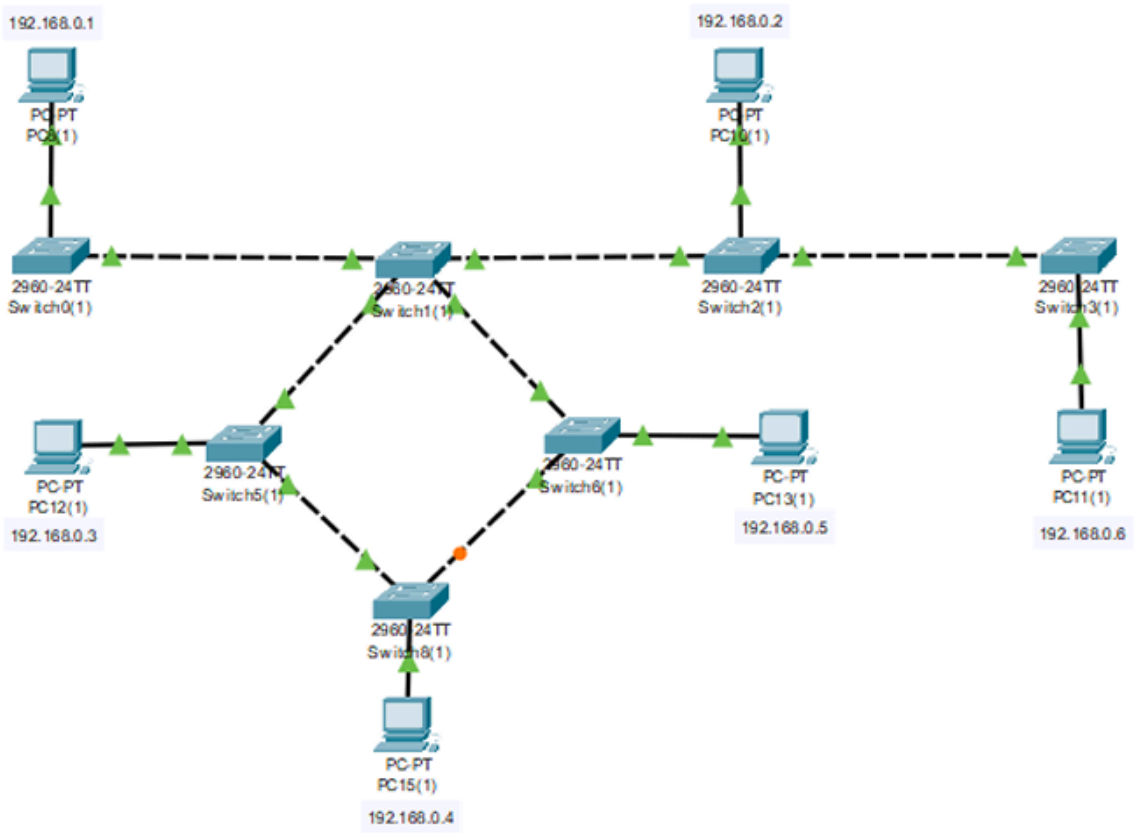
192.168.0.1
PC-PT
PC0(1)
192.168.0.2
PC-PT
PC1(1)
2960-24TT
Switch0(1)
2960-24TT
Switch1(1)
2960-24TT
Switch2(1)
2960-24TT
Switch3(1)
PC-PT
PC12(1)
192.168.0.3
2960-24TT
Switch5(1)
2960-24TT
Switch6(1)
PC-PT
PC13(1)
192.168.0.5
PC-PT
PC11(1)
192.168.0.6
2960-24TT
Switch8(1)
PC-PT
PC15(1)
192.168.0.4

Output:

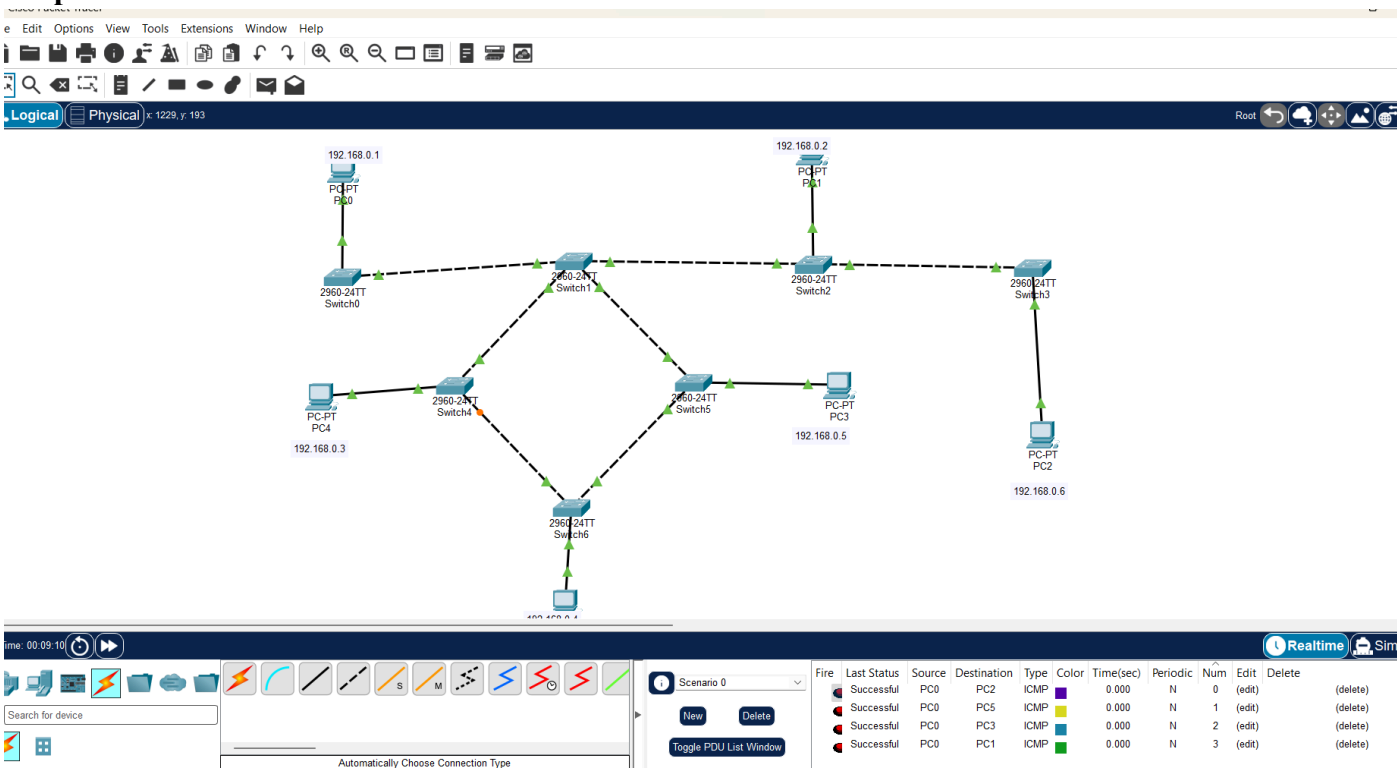
Edit Options View Tools Extensions Window Help
Logical
Physical
Root
192.168.0.1
PC-PT
PC0
192.168.0.2
PC-PT
PC1
2960-24TT
Switch0
2960-24TT
Switch1
2960-24TT
Switch2
2960-24TT
Switch3
PC-PT
PC4
192.168.0.3
2960-24TT
Switch4
2960-24TT
Switch5
PC-PT
PC3
192.168.0.5
PC-PT
PC2
192.168.0.6
2960-24TT
Switch6
Realtime
Search for device
Automatically Choose Connection Type
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Successful PC0 PC2 ICMP 0.000 N 0 (edit) (delete)
Successful PC0 PC5 ICMP 0.000 N 1 (edit) (delete)
Successful PC0 PC3 ICMP 0.000 N 2 (edit) (delete)
Successful PC0 PC1 ICMP 0.000 N 3 (edit) (delete)

Result: Thus the Hybrid topology is implemented with Packet Tracer simulation Tool.