

Stage 16N Inhomogeneous Plate-with-Hole Cycle-Jump Benchmark Living Technical Report

Master Thesis Preparation

Last updated: 2026-06-06

Abstract

This living report records the geometry, numerical setup, HPC configuration, reference results, reinjection tests, diagnostic failures, and current conclusions for Stage 16N. The stage uses an inhomogeneous Abaqus plate-with-hole benchmark with a NEML-equivalent Chaboche UMAT. The full 1000-cycle non-jump reference has been completed and is used as the validation baseline for later fixed and adaptive cycle-jump simulations. The present state of the work is that the global response can be reproduced well after manual SDVINI/SIGINI state injection, but exact local state reproduction near the hole is not achieved by manual state initialization alone. Therefore later cycle-jump errors must be interpreted relative to the measured reinjection error floor.

Contents

1 Purpose and Current Status	3
2 Geometry and Model Definition	3
2.1 Boundary Conditions and Loading	4
3 HPC and Production Policy	4
3.1 Two-Job Scheduling Policy	5
3.2 Mail Notification Policy	5
4 Full 1000-Cycle Non-Jump Reference	5
5 Adaptive ΔN Table	6
5.1 Reinjection-Aware Controller Update	6
6 Stage 16N-B: State-Initialized Continuation Verification	7
6.1 State Reader Implementation	7
7 B0-1 Cycle-100 to Cycle-250 State-Initialized Continuation	8
8 B0-1 Local Diagnostic Review	8
9 B0 Cycle-100 Initialization-Only Audit	9
9.1 Initialization Audit Interpretation	9
10 Reinjection Error Floor and Revised Metric Policy	9

11 Stage 16N-C Fixed State-Initialized Jump Scaffold	9
11.1 Prepared-Only B2 and B3 Cases	10
11.2 B1 Result	10
11.3 B1 Jump-Size Sensitivity	11
11.4 B1D3/B1D4/B1D5 Boundary Check	11
11.5 B1D4 Pointwise Diagnostic	11
11.6 B1D3 Confirmation Result	12
11.7 Revised Local-Stress Acceptance Policy	12
11.8 Unattended Dependency Queue	13
11.9 Long-Weekend Dependency Extension	14
11.10Post-Queue Check on 2026-06-07	15
12 Failures and Fixes	16
13 Current Conclusion	17
14 Next Work	17
A Key Repository Evidence Files	18

1 Purpose and Current Status

The purpose of Stage 16N is to move from single-element or homogeneous cycle-jump demonstrations to an inhomogeneous finite-element benchmark. The model is deliberately more demanding: a plate with a central hole produces localized cyclic plasticity near the hole, so the method must be judged not only from global reaction-force loops but also from local stress and state-variable evolution.

Table 1: Current Stage 16N infrastructure and validation status.

Item	Status
1000-cycle full non-jump reference	Completed
16-CPU production policy	Locked
Abaqus threaded launcher	Verified
Adaptive ΔN table	Completed
Exact reinjection scaffold	Prepared
HPC mail policy	Fixed
B0-1 exact reinjection solver run	Completed
B0-1 scientific result	Practical baseline accepted
B0 initialization-only audit	Completed
B0-2 / B0-3 exact reinjection jobs	On hold
Fixed state-initialized jump validation	Scaffold prepared
Adaptive cycle-jump workflow	On hold

2 Geometry and Model Definition

The Stage 16N model is a three-dimensional plate-with-hole benchmark. It is intended to create localized cyclic evolution near the hole while retaining a global hysteresis response that can be compared across full-reference, exact-reinjection, fixed-jump, and adaptive-jump runs.

Table 2: Stage 16N model geometry and mesh summary.

Quantity	Value
Plate length	20.0
Plate height	10.0
Plate thickness	1.0
Central hole radius	1.0
Mesh spacing	$\Delta x = \Delta y = 0.25$
Element type	C3D8
Nodes	6642
Elements	3148
Hole-ring elements	60
Material model	NEML-equivalent Chaboche UMAT
State variables	27 SDVs

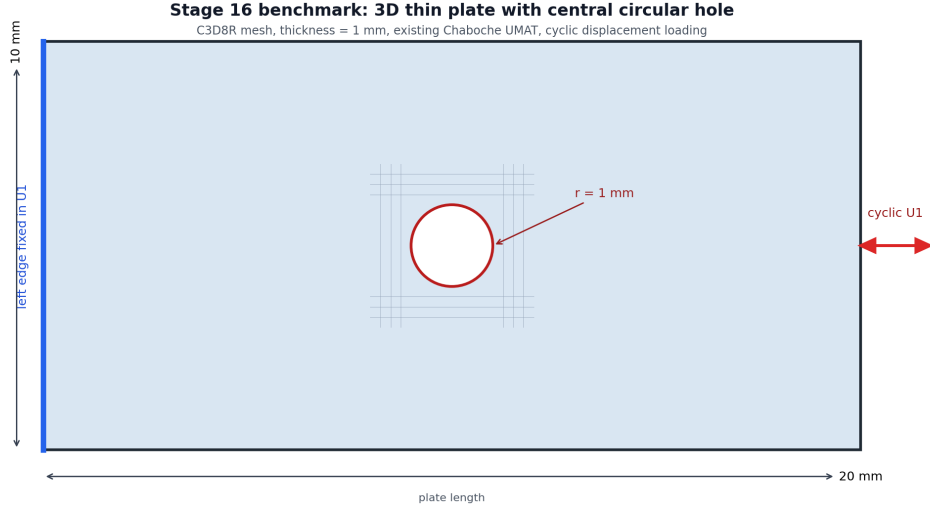


Figure 1: Plate-with-hole geometry used for the Stage 16N benchmark.

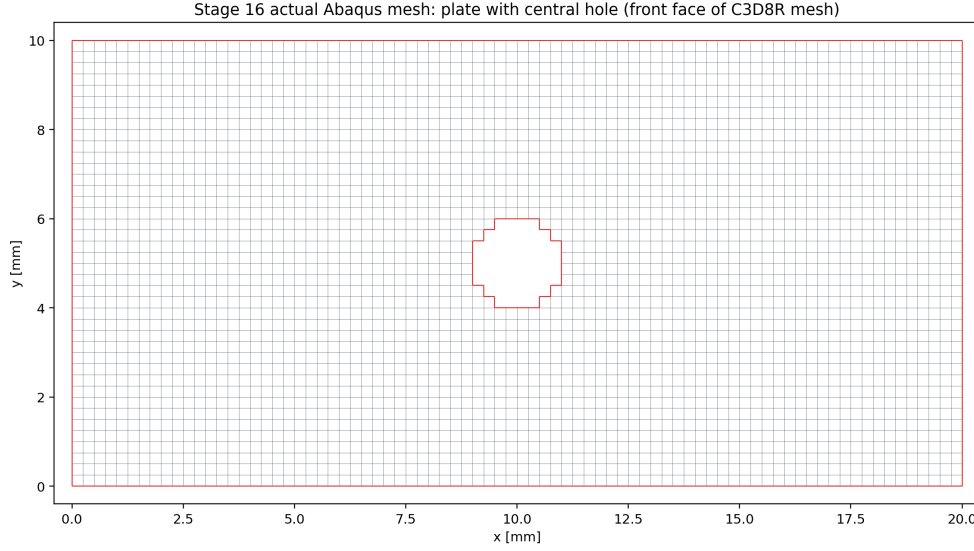


Figure 2: Actual structured C3D8 mesh with the element-wise approximation of the central hole.

2.1 Boundary Conditions and Loading

The left edge is fixed in the axial direction. Two anchor nodes constrain rigid-body modes. The right edge receives a cyclic axial displacement amplitude of ± 0.10 . The full reference contains 1000 full non-jump cycles. Selected field output is stored at cycles 1, 2, 10, 50, 100, 250, 500, 750, and 1000.

3 HPC and Production Policy

The first corrected 1000-cycle parallel reference used 30 OpenMP threads, but PBS accounting showed that the average effective CPU usage was far below the requested 30 cores. A 16-CPU verification run was therefore used to lock a more resource-efficient production policy.

Table 3: Locked Stage 16N production setting.

Setting	Value
Production default	1 MPI rank $\times$ 16 OpenMP threads
PBS request	<code>select=1:ncpus=16:mpiprocs=1:ompthreads=16</code>
Abaqus launch	<code>cpus=16 mp_mode=threads</code>
Expected message-file line	1 MPI RANK $\times$ 16 THREADS
Maximum walltime per job	24:00:00
Maximum simultaneous jobs	2
Maximum active Stage 16N cores	32

This policy is not claimed to perfectly saturate all 16 CPUs. It is a resource-efficient compromise that prevents the earlier serial fallback and avoids reserving 30 CPUs for a workload that did not use them efficiently.

3.1 Two-Job Scheduling Policy

From 2026-06-06 onward, Stage 16N solver planning assumes at most two simultaneous production jobs. Each job requests 16 CPU cores with one MPI rank and 16 OpenMP threads, so the intended active usage is 32 CPU cores. The two slots are used only after the relevant method gate has passed. First-time method checks, such as the first fixed cycle-jump case B1, run alone until extracted and compared. If B1 passes, B2 and B3 can be submitted together. If B1 fails badly, B2 and B3 remain held and the two slots are used instead for smaller or diagnostic B1 variants.

3.2 Mail Notification Policy

Future PBS jobs must explicitly request mail on abort, begin, and end:

```
#PBS -m abe
#PBS -M pr21vyci@mailserver.tu-freiberg.de
```

This was added because PBS accounting previously showed `Mail.Points = a`, which only requests abort/failure mail.

4 Full 1000-Cycle Non-Jump Reference

The full non-jump reference was completed using Abaqus/Standard with the corrected threaded launcher.

Table 4: Completed 1000-cycle reference run.

Quantity	Value
PBS job	1335408.mmaster02
Abaqus job	<code>stage16n_parallel_max_reference_1000cycles</code>
Walltime	17:56:43
CPU time	178:03:42
Requested resources	30 CPUs, 135 GB
Abaqus parallelism	1 MPI rank $\times$ 30 threads
Completed cycles	1000
Last partial cycle	none

Table 5: Reference evolution from cycle 1 to cycle 1000.

Quantity	Cycle 1	Cycle 1000	Change
RF1_max	2356.834	2908.244	+23.40%
RF1_min magnitude	2509.712	3074.823	+22.52%
loop_area_abs	433.822	577.068	+33.02%
HOLE_RING_MISES_MAX	398.503	492.827	+23.67%
HOLE_RING_SDV1_MAX	0.0561	26.0519	—
HOLE_RING_SDV8_MAX	0.2996	92.4455	—
HOLE_RING_SDV11_MAX	7.9019	61.3076	—

The evolution clearly exceeds the original continuation thresholds for global loop quantities and local hole-ring state variables. This confirms that the plate-with-hole benchmark is meaningful for cycle-jump validation.

5 Adaptive ΔN Table

The adaptive ΔN table was computed from the completed 1000-cycle reference. It uses dense global cycle metrics and selected local field-output anchors. The controlling variable is the most sensitive monitored quantity, not only the global reaction force.

Table 6: Conservative adaptive ΔN estimates from the 1000-cycle reference.

Base cycle	Next anchor	Target	ΔN	Controlling variable
1	2	2	1	HOLE_RING_SDV8_MAX
2	10	3	1	HOLE_RING_SDV8_MAX
10	50	14	4	HOLE_RING_SDV8_MAX
50	100	61	11	HOLE_RING_SDV1_MAX
100	250	124	24	HOLE_RING_SDV1_MAX
250	500	299	49	HOLE_RING_SDV1_MAX
500	750	575	75	HOLE_RING_SDV1_MAX
750	1000	849	99	HOLE_RING_MISES_MAX

The table shows that local state variables near the hole strongly restrict the allowable jump size. This supports the decision that any later fixed/adaptive jump validation must include local metrics, not only global RF loops.

5.1 Reinjection-Aware Controller Update

After the B0 initialization audit, HOLE_RING_SDV8_MAX was downgraded from a hard pass/fail controller to a diagnostic-only variable because it already shows a large mismatch immediately after manual SDVINI/SIGINI initialization. A reinjection-aware table was therefore generated with SDV8 retained in diagnostic output but removed from the hard controller list.

Table 7: Reinjection-aware adaptive ΔN estimates with SDV8 diagnostic-only.

Base	Next anchor	Target	ΔN	Controller
1	2	2	1	HOLE_RING.SDV11_MAX
2	10	3	1	HOLE_RING.SDV1_MAX
10	50	15	5	HOLE_RING.SDV1_MAX
50	100	61	11	HOLE_RING.SDV1_MAX
100	250	124	24	HOLE_RING.SDV1_MAX
250	500	299	49	HOLE_RING.SDV1_MAX
500	750	575	75	HOLE_RING.SDV1_MAX
750	1000	849	99	HOLE_RING.MISES_MAX

The first conservative fixed-jump gate remains cycle 100 to cycle 125, followed by normal continuation to cycle 250. This row is still controlled by HOLE_RING.SDV1_MAX, not by diagnostic-only SDV8.

6 Stage 16N-B: State-Initialized Continuation Verification

Before any real cycle jump is allowed, the workflow must prove that stress and state-variable fields can be transferred into a new Abaqus run. The route used here is manual state-initialized continuation through SDVINI/SIGINI; it is not a native Abaqus restart. The originally intended verification cases were:

- B0-1: exact cycle 100 state, continue normally to cycle 250.
- B0-2: exact cycle 250 state, continue normally to cycle 500.
- B0-3: exact cycle 500 state, continue normally to cycle 1000.

B0-2 and B0-3 remain on hold. The B0-1 and initialization-audit results are now treated as the measured reinjection baseline rather than as proof of an exact local restart.

6.1 State Reader Implementation

The initial CSV preload design failed under threaded Abaqus because multiple threads attempted to load the same file concurrently. The state-transfer implementation was therefore changed to a direct-access binary reader. Each record contains:

S1, S2, S3, S4, S5, S6, SDV1, ..., SDV27

The record number is:

`record = (NOEL - 1) * 8 + NPT`

On the Abaqus/Intel Fortran environment used here, direct-access RECL is interpreted in 4-byte words. Therefore the correct value for 33 double-precision values is:

`RECL = 66`

7 B0-1 Cycle-100 to Cycle-250 State-Initialized Continuation

B0-1 completed the Abaqus solver successfully. PBS reported exit status 2 only because the original postprocessing path failed after solver completion; extraction was rerun manually afterward.

Table 8: B0-1 run accounting and solver status.

Quantity	Value
PBS job	1336497.mmamaster02
Route	cycle 100 state $\rightarrow$ cycle 250
PBS walltime	01:41:36
PBS CPU time	10:52:42
Requested CPUs	16
Abaqus solver	completed
Abaqus parallelism	1 MPI rank $\times$ 16 threads
Scientific status	Practical baseline accepted

Table 9: B0-1 comparison against the 1000-cycle reference at cycle 250.

Quantity	Relative error
RF1_max	0.259048%
RF1_min	0.687538%
loop_area_abs	0.967300%
HOLE_RING_MISES_MAX	7.63648%
HOLE_RING_S11_MAX_ABS	9.58753%
HOLE_RING_SDV1_MAX	0.360172%
HOLE_RING_SDV8_MAX	10.9164%
HOLE_RING_SDV11_MAX	7.27213%

The global response is excellent, but the local hole-ring stress and state-variable errors are too large for a clean exact-restart claim.

8 B0-1 Local Diagnostic Review

A pointwise hole-ring diagnostic was run to determine whether the high local error was only a maximum-location artifact. It was not. The reference and reinjection maxima for **SDV8** occurred at the same element and integration point.

Table 10: B0-1 SDV8 argmax diagnostic at cycle 250.

Quantity	Value
Reference SDV8 argmax	element 1242, IP 7
Reinjection SDV8 argmax	element 1242, IP 7
Same argmax location	true
Reference value	91.1466598511
Reinjection value	81.1967315674
Argmax relative error	10.9164%

This made B0-1 a real local mismatch rather than a harmless maximum-location shift.

9 B0 Cycle-100 Initialization-Only Audit

The initialization audit was created to answer whether the local mismatch already exists immediately after exact cycle-100 initialization, before any cycle-100 to cycle-250 continuation.

Table 11: Cycle-100 binary reader and initialization audit.

Quantity	Value
CSV-vs-binary maximum absolute error	3.55×10^{-15}
Common hole-ring element/IP records	480
SDV8 median relative error	12.7022%
SDV8 95th percentile relative error	150.665%
SDV8 maximum relative error	479.090%
SDV8 argmax location	same element/IP, 1242/7

The binary extraction and reader pipeline is correct to machine precision. Therefore the local mismatch is not caused by the Python binary writer or direct-access file format. The mismatch appears during manual Abaqus initialization and the tiny equilibrium step.

9.1 Initialization Audit Interpretation

The most likely interpretation is that SDVINI/SIGINI inject stress and state variables correctly, but the manual state-initialized model does not reconstruct the compatible displacement, strain, solver-history, and full equilibrium state of the original reference analysis. Strain-like local state variables such as SDV8 are therefore adjusted during the first equilibrium solve. This means B0-1 is useful as a practical state-initialized continuation test, but it is not a mathematically exact Abaqus restart for local fields.

10 Reinjection Error Floor and Revised Metric Policy

The B0 audit closes Stage 16N-B with the following conclusion:

Global continuation works, binary state transfer works, but local exact restart is not achieved with SDVINI/SIGINI alone.

Future fixed and adaptive jump results must separate the manual reinjection error floor from the additional error caused by cycle-jump extrapolation. The primary pass/fail metrics are RF1 maximum/minimum, loop area, global hysteresis shape, HOLE_RING_SDV1_MAX, HOLE_RING_SDV11_MAX, and HOLE_RING_MISES_MAX. HOLE_RING_S11_MAX_ABS remains important, but it is now treated as a diagnostic warning metric rather than a sole hard rejection variable, because the B1D3/B1D4/B1D5 boundary study showed non-monotonic local stress sensitivity. HOLE_RING_SDV8_MAX also remains diagnostic-only because it is already affected by initialization before any cycle-jump approximation is applied.

11 Stage 16N-C Fixed State-Initialized Jump Scaffold

Stage 16N-C now begins with one conservative fixed jump:

Table 12: First fixed state-initialized jump case.

Quantity	Value
Case name	B1_100_to_125_to_250
Base state	cycle 100
Interpreted jump target	cycle 125
Normal Abaqus continuation	cycles 126–250
Comparison endpoint	cycle 250
Initial state strategy	zero-order hold from cycle 100
Baseline for interpretation	B0-1 cycle 100 to 250 continuation

The zero-order state strategy is intentionally conservative. It measures the error added by skipping cycles 101–125 on top of the known manual reinjection floor. If this case gives acceptable global error and controlled primary local errors, the next fixed jump cases can be expanded to cycle 250 to 300, cycle 500 to 575, and cycle 750 to 850.

11.1 Prepared-Only B2 and B3 Cases

B2 and B3 may be prepared while B1 is running, but their solver jobs are gated by the B1 result. They must not be submitted until B1 has been extracted, compared against the 1000-cycle reference, and interpreted against the B0 reinjection baseline.

Table 13: Prepared-only fixed-jump cases held behind the B1 gate.

Case	Base state	Jump target	Compare endpoint
B2_250_to_300_to_500	cycle 250	cycle 300	cycle 500
B3_500_to_575_to_750	cycle 500	cycle 575	cycle 750

If B1 passes, B2 and B3 are the first paired submission under the new two-job policy. If B1 fails, the paired slots should instead be used for B1-small and B1-diagnostic variants.

11.2 B1 Result

B1 completed successfully as an Abaqus job, but it did not pass the fixed-jump method gate. The comparison at cycle 250 gave good global errors but unacceptable primary local state errors.

Table 14: B1 fixed-jump comparison against the 1000-cycle reference and B0 baseline.

Quantity	B1 total error	B0 baseline	Additional error
RF1_max	0.361433%	0.259048%	0.102384%
RF1_min	2.27018%	0.687538%	1.58264%
loop_area_abs	1.26223%	0.967300%	0.294934%
HOLE_RING_MISES_MAX	2.40141%	7.63648%	-5.23507%
HOLE_RING_S11_MAX_ABS	1.21869%	9.58753%	-8.36884%
HOLE_RING_SDV1_MAX	10.2916%	0.360172%	9.93139%
HOLE_RING_SDV8_MAX	16.1769%	10.9164%	5.26047%
HOLE_RING_SDV11_MAX	11.2777%	7.27213%	4.00560%

The B1 status is **review**, controlled by HOLE_RING_SDV11_MAX. Therefore B2 and B3 remain held. The two-job policy should next be used for smaller or diagnostic B1 variants rather than larger fixed jumps.

11.3 B1 Jump-Size Sensitivity

The next two-job batches reduced the first fixed jump from cycle 100 to smaller target cycles while keeping the same comparison endpoint at cycle 250. This directly tests whether the local hole-ring error decreases when fewer cycles are skipped.

Table 15: B1 fixed-jump sensitivity at cycle 250.

Case	Jump target	Skipped cycles	Status	Controlling quantity
B1Q_100_to_106_to_250	106	6	review, 5.75372%	HOLE_RING_MISES_MAX
B1S_100_to_112_to_250	112	12	review, 9.34203%	HOLE_RING_S11_MAX_ABS
B1_100_to_125_to_250	125	25	review, 11.2777%	HOLE_RING_SDV11_MAX

The sensitivity study confirms that the original jump from cycle 100 to 125 was too aggressive for local hole-ring variables. Reducing the target to cycle 106 reduced the maximum primary error to approximately 5.75%, but this remained above the strict 5% gate. The useful scientific conclusion is that the adaptive jump-size estimate near cycle 100 was too optimistic and must be reduced by an early-cycle safety factor. Since the reinjection-aware table suggested approximately $\Delta N \approx 24$ at cycle 100, the practical early safety factor is approximately

$$\frac{5}{24} \approx 0.21.$$

This supports an early-cycle safety-factor range of approximately 0.20–0.25, controlled by local field quantities rather than by RF1 alone.

11.4 B1D3/B1D4/B1D5 Boundary Check

A stricter boundary check was then performed with target cycles 103, 104, and 105. The result is useful, but non-monotonic:

Table 16: B1D3/B1D4/B1D5 boundary check at cycle 250.

Case	Jump target	Skipped cycles	Status	Controlling quantity
B1D3_100_to_103_to_250	103	3	review, 9.13095%	HOLE_RING_S11_MAX_ABS
B1D4_100_to_104_to_250	104	4	review, 9.34307%	HOLE_RING_S11_MAX_ABS
B1D5_100_to_105_to_250	105	5	pass, 2.34986%	HOLE_RING_SDV1_MAX
B1Q_100_to_106_to_250	106	6	review, 5.75372%	HOLE_RING_MISES_MAX

B1D5 remains a useful successful case:

100 -> 105 -> 250, with maximum primary error 2.34986%.

However, B1D3 and B1D4 both failed under the local stress criterion even though they used shorter jumps. B1D3 was controlled by `HOLE_RING_S11_MAX_ABS` at 9.13095%, and B1D4 was controlled by the same metric at 9.34307%. Therefore the cycle-100 boundary is not robust under a hard local-stress maximum criterion. The isolated B1D5 pass should not be generalized as a universal accepted early-cycle rule.

11.5 B1D4 Pointwise Diagnostic

B1D4 was diagnosed at the hole-ring element/integration-point level using the 1000-cycle reference ODB and the B1D4 ODB at cycle 250. The diagnostic compared 480 common hole-ring element/IP records and checked both pointwise errors and argmax locations.

Table 17: B1D4 pointwise diagnostic summary at cycle 250.

Variable	Mean error	Median error	95th percentile	Max pointwise error
S11_ABS	13.8050%	11.6186%	35.2953%	121.4232%
MISES	8.05921%	—	—	—
SDV1	1.64737%	—	—	—
SDV8	131.337%	—	—	—
SDV11	50.4912%	—	—	—

For the controlling stress metric, the reference and B1D4 argmax location were the same:

S11_ABS argmax element/IP = 1242/7 in both the reference and B1D4.

The global phase check did not show a cycle-phase mismatch. Both runs used CYCLE_0250; the cycle had local time from 0 to 1, displacement extrema matched exactly, and the global loop-area error was only 0.107074%. Therefore the B1D4 failure is not explained by a simple output-phase or step-numbering mismatch. It appears to be a real local stress/reinjection sensitivity in the B1D4 path.

This keeps the conservative decision unchanged: B1D5 is a useful pass case, but B1D3 and B1D4 show that the early-cycle jump boundary is not robust when local stress extrema are treated as hard primary rejection variables.

11.6 B1D3 Confirmation Result

B1D3 completed successfully as an Abaqus job and was compared against the 1000-cycle reference at cycle 250. It did not pass the fixed-jump gate.

Table 18: B1D3 comparison against the 1000-cycle reference at cycle 250.

Quantity	Relative error
RF1_max	1.45771%
RF1_min	0.661665%
loop_area_abs	0.214351%
HOLE_RING_MISES_MAX	7.43637%
HOLE_RING_S11_MAX_ABS	9.13095%
HOLE_RING_SDV1_MAX	1.52456%
HOLE_RING_SDV8_MAX	9.68802%
HOLE_RING_SDV11_MAX	5.43394%

B1D3 confirms that the B1D4 behavior is not an isolated single-case artifact. The global response remains accurate, but the local hole-ring stress maximum and SDV11 response exceed the strict local threshold. The current interpretation is therefore:

Early-cycle jumping from cycle 100 is not robust under local stress-maximum acceptance. The pass at cycle 105 is useful evidence that small jumps can work, but the non-monotonic failures at cycles 103 and 104 require a more careful local acceptance strategy or a later-start jump strategy.

11.7 Revised Local-Stress Acceptance Policy

The B1D3/B1D4/B1D5 boundary is scientifically important because it shows that smaller jumps are not always better when judged by a single local stress maximum. The robust conclusion is:

Global hysteresis quantities are robust, but local stress-maximum metrics near the hole are non-monotonic and highly sensitive to manual state initialization and re-equilibration.

Therefore, `HOLE_RING_S11_MAX_ABS` is retained and reported, but it should not be used as the only hard pass/fail metric. The revised three-level metric strategy is:

- Primary pass/fail: `RF1` extrema, loop area, `HOLE_RING_SDV1_MAX`, `HOLE_RING_SDV11_MAX`, and `HOLE_RING_MISES_MAX`.
- Secondary/diagnostic: `HOLE_RING_S11_MAX_ABS`, single-point stress maxima, and `SDV8`.
- Robust local-field additions: mean/median, 95th percentile, or 99th percentile hole-ring stress errors from pointwise distributions.

This does not hide the local stress sensitivity. It reports it as evidence that local extrema are more restrictive and less stable than global hysteresis metrics.

The current reporting conclusion is:

The B1 sensitivity study showed that the original jump from cycle 100 to 125 was too aggressive for the local hole-ring variables. Reducing the jump to cycle 105 gave an acceptable maximum primary error of 2.35%, but the cycle 103 and 104 cases both produced non-monotonic local stress errors controlled by `HOLE_RING_S11_MAX_ABS`. Therefore, early-cycle jumping from cycle 100 cannot yet be accepted as robust under a hard local stress-maximum criterion.

B2 and B3 remain held. The next two-job policy is therefore used for one smaller cycle-100 diagnostic jump and one later-cycle safe pilot, rather than for the original larger fixed jumps.

Table 19: Next two-job diagnostic pair submitted after the B1D3 result.

Case	Route	Purpose	PBS job
<code>B1D2_100_to_102_to_250</code>	100 → 102 → 250	cycle-100 hard-stress check	1341026.mmamaster02
<code>B2SAFE_250_to_260_to_500</code>	250 → 260 → 500	later-start safe pilot	1341027.mmamaster02
<code>B2SAFE_EQ_250_to_260_to_500</code>	250 → 260 → 500	smaller equilibration increment	1341028.mmamaster02

The first B2SAFE submission failed after datacheck during `FIXED_JUMP_EQILIBRATE_TO_CYCLE_0260`. Abaqus reported slow force convergence and `TOO MANY ATTEMPTS MADE FOR THIS INCREMENT`. A distinct rerun case, `B2SAFE_EQ_250_to_260_to_500`, reduced the equilibration initial increment from 1.0×10^{-6} to 1.0×10^{-8} , but it failed in the same first equilibration step after cutbacks to 6.25×10^{-10} . This is a useful result by itself: the later cycle-250 reinjection point is numerically more difficult to equilibrate than the cycle-100 cases, and it requires an explicit cycle-250 reinjection/equilibration diagnostic before B2-safe can be interpreted scientifically.

11.8 Unattended Dependency Queue

The unattended queue was reorganized into two dependency-controlled streams so that at most two 16-CPU jobs can run at once while preserving the scientific gates.

Table 20: Dependency-controlled unattended queue.

Stream	Case	PBS job	Dependency/status
A	B1D2_100_to_102_to_250	1341026.mmaster02	running
A	B1D1_100_to_101_to_250	1341029.mmaster02	afterany:1341026
B	B0_250_to_500	1341033.mmaster02	failed in reinjection equilibration
B	B2D2_250_to_252_to_500	1341034.mmaster02	afterok not satisfied
B	B2D5_250_to_255_to_500	1341035.mmaster02	afterok not satisfied
B	B0_AUDIT_0250_INITIALIZATION_ONLY	1341036.mmaster02	failed in equilibration

The first B0-2 exact-reinjection submission, 1341030.mmaster02, exited with status 126 because the PBS script had CRLF line endings and invoked `/bin/bash^M`. Its dependent jobs 1341031 and 1341032 did not run as meaningful solver jobs. The exact-reinjection submit writer was corrected to write LF-only PBS scripts, the remote PBS file was normalized, and Stream B was resubmitted as jobs 1341033–1341035.

The corrected B0-2 job, 1341033.mmaster02, then ran Abaqus and failed during the first REINJECTION_EQUILIBRATE increment with TOO MANY ATTEMPTS MADE FOR THIS INCREMENT. Therefore B2D2 and B2D5 correctly remained blocked by their **afterok** dependencies. The Stream B replacement, B0_AUDIT_0250_INITIALIZATION_ONLY job 1341036.mmaster02, also failed in its first initialization/equilibration increment after cutbacks to 6.25×10^{-11} . This means the cycle-250 problem is not a jump-size result: exact cycle-250 manual state injection cannot yet be equilibrated robustly.

11.9 Long-Weekend Dependency Extension

Because the user will be away for more than 40 hours, the unattended queue was extended with additional scientifically safe diagnostics. The queue still preserves the two-job policy: only one Stream A job and one Stream B job can run at a time, and every job requests 16 CPUs, 90 GB, and 24 hours.

Table 21: Extended long-weekend queue.

Stream	Case	PBS job	Dependency/status
A	B1D2_100_to_102_to_250	1341026.mmaster02	running
A	B1D1_100_to_101_to_250	1341029.mmaster02	afterany:1341026
A	B1D2_EQ_100_to_102_to_250	1341037.mmaster02	afterany:1341029
A	B1D1_EQ_100_to_101_to_250	1341038.mmaster02	afterany:1341037
B	B0_AUDIT_0500_INITIALIZATION_ONLY	1341039.mmaster02	running
B	B0_AUDIT_0250_SDVINI_ONLY	1341040.mmaster02	afterany:1341039
B	B0_AUDIT_0250_SIGINI_ONLY	1341041.mmaster02	afterany:1341040
B	B0_AUDIT_0500_SDVINI_ONLY	1341042.mmaster02	afterany:1341041
B	B0_AUDIT_0500_SIGINI_ONLY	1341043.mmaster02	afterany:1341042

The two B1D*_EQ jobs are fallback diagnostics with a smaller equilibration initial increment. They should be interpreted as numerical sensitivity checks for the cycle-100 boundary, not as authorization to submit B2/B3. The Stream B audit jobs split the manual cycle-250 and cycle-500 state injection into full, SDVINI-only, and SIGINI-only variants. This should identify whether the cycle-250/500 equilibration barrier is driven primarily by STATEV injection, stress injection, or the coupled manual restart.

The Stream B injection-only diagnostics completed quickly and all returned exit status 1. Therefore, a second B1-only EQ stream was submitted into the free slot. This keeps the cluster

at the intended two active 16-core jobs while continuing to avoid B2/B3.

Table 22: Final long-weekend live and queued jobs.

Stream	Case	PBS job	Dependency/status
A	B1D2_100_to_102_to_250	1341026.mmaste02	running
A	B1D1_100_to_101_to_250	1341029.mmaste02	afterany:1341026
A	B1D2_EQ_100_to_102_to_250	1341037.mmaste02	afterany:1341029
A	B1D1_EQ_100_to_101_to_250	1341038.mmaste02	afterany:1341037
A	B1D3_EQ_100_to_103_to_250	1341044.mmaste02	afterany:1341038
A	B1D4_EQ_100_to_104_to_250	1341045.mmaste02	afterany:1341044
A	B1D5_EQ_100_to_105_to_250	1341046.mmaste02	afterany:1341045
C	B1Q_EQ_100_to_106_to_250	1341047.mmaste02	running
C	B1S_EQ_100_to_112_to_250	1341048.mmaste02	afterany:1341047
C	B1_EQ_100_to_125_to_250	1341049.mmaste02	afterany:1341048

The final live/queued solver count after this extension was 10 jobs: 2 running and 8 held by dependencies. The active requested resource load was therefore $2 \times 16 = 32$ CPU cores.

11.10 Post-Queue Check on 2026-06-07

The long-weekend queue had drained by the 2026-06-07 check: `qstat -u pr21vyci` returned no active jobs. The PBS extended-history query with `qstat -x -f` no longer exposed the listed job IDs, returning `Unknown Job Id` for 1341026, 1341029, 1341037, 1341038, 1341044–1341049, and the audit jobs 1341039–1341043. Therefore the final job assessment below is based on the completed run artifacts in the remote Stage 16N directory and the refreshed comparison CSVs, not on retained PBS accounting records.

Table 23: Final fixed-jump comparison after the dependency queue drained.

Case	Route	Status	Max primary error	Controller
B1D1	100 → 101 → 250	review	8.70868%	SDV11
B1D1_EQ	100 → 101 → 250	review	8.70868%	SDV11
B1D2	100 → 102 → 250	review	8.79420%	SDV11
B1D2_EQ	100 → 102 → 250	review	8.79420%	SDV11
B1D3	100 → 103 → 250	review	7.43637%	MISES
B1D3_EQ	100 → 103 → 250	review	7.43637%	MISES
B1D4	100 → 104 → 250	review	7.54718%	SDV11
B1D4_EQ	100 → 104 → 250	review	7.54718%	SDV11
B1D5	100 → 105 → 250	pass	2.34986%	SDV1
B1D5_EQ	100 → 105 → 250	pass	2.34986%	SDV1
B1Q	100 → 106 → 250	review	5.75372%	MISES
B1Q_EQ	100 → 106 → 250	review	5.75372%	MISES
B1S	100 → 112 → 250	review	7.63033%	SDV11
B1S_EQ	100 → 112 → 250	review	7.63033%	SDV11
B1	100 → 125 → 250	review	11.27770%	SDV11
B1_EQ	100 → 125 → 250	review	11.27770%	SDV11

The smaller-equilibration EQ reruns reproduced the same comparison errors as their non-EQ counterparts. This is important: the cycle-100 B1 jump-size trend is controlled by the physical/local state mismatch relative to the 1000-cycle reference, not by the initial equilibration

increment used in the fixed-jump continuation. Under the current 5% primary-error gate, only the $100 \rightarrow 105 \rightarrow 250$ case passes; the $100 \rightarrow 106$ and larger jumps remain above threshold, and the $100 \rightarrow 101/102/103/104$ cases still show local-state or Mises review errors.

The later-cycle fixed-jump candidates B2, B2SAFE, B2SAFE_EQ, B2D2, B2D5, and B3 remain **missing_outputs**. This is expected because the cycle-250 exact-reinjection/equilibration gate failed and the unsafe dependent jobs were not allowed to produce accepted fixed-jump validations.

12 Failures and Fixes

Table 24: Important failures and fixes recorded in Stage 16N.

Issue	Observation	Fix / conclusion
Accidental serial-like run	A 22-hour run reached only 592 full cycles.	Parallel launcher corrected; later 1000-cycle reference completed.
30-CPU over-allocation	30-thread run averaged about 10 effective cores.	16 CPUs selected as production compromise.
Missing start/end email	PBS accounting showed <code>Mail.Points = a</code> .	Added <code>#PBS -m abe</code> and mail user to Stage 16N submit scripts.
CSV state-reader race	Threaded Abaqus calls attempted concurrent CSV preload.	Replaced with direct-access binary state reader.
Wrong direct-access record length	Abaqus/Intel runtime expected word-based RECL.	Set <code>RECL = 66</code> for 33 double values.
Postprocessing path failure	B0-1 solver completed but PBS exit status was 2.	Fixed extractor path and reran extraction manually.
B0-1 local mismatch	Global errors under 1%, local SDV8 max error 10.9164%.	Added pointwise diagnostic and initialization-only audit.
Initialization local mismatch	Binary audit passed, but SDV8 mismatch appeared immediately.	Concluded manual SDVINI/SIGINI is not a mathematically exact local restart.
Metric policy mismatch	Original adaptive table allowed SDV8 to act as a hard controller.	Added reinjection-aware table with SDV8 diagnostic-only.
B1 fixed-jump gate	Global B1 errors were small, but SDV1 and SDV11 primary local errors exceeded 10%.	Hold B2/B3 and use the two-job policy for smaller/debug B1 variants.
B1D4/B1D5 non-monotonic boundary	B1D5 passed at 2.34986%, but B1D4 failed at 9.34307% controlled by S11.	Accept $100 \rightarrow 105$ only with diagnostic confirmation; diagnose B1D4 before B2/B3.
B1D4 pointwise diagnostic	B1D4 and the reference share the same S11_ABS argmax location, and median/p95 stress errors are not negligible.	Treat B1D4 as real local stress sensitivity, not a simple phase or argmax-swap artifact.
B1D3 confirmation	B1D3 also failed at 9.13095%, controlled by S11_ABS.	Do not generalize the B1D5 pass; treat cycle-100 jumping as not robust under hard local stress maxima.

Issue	Observation	Fix / conclusion
Metric policy revision	S11_MAX_ABS is non-monotonic across B1D3/B1D4/B1D5.	Keep S11 maxima as diagnostic warnings; use global, STATEV, and Mises-type metrics as primary acceptance controls.
Completed B1 dependency queue	The drained queue shows B1D5 and B1D5_EQ pass at 2.34986%, while all other completed B1-size variants remain review cases.	Treat 100 $\rightarrow$ 105 $\rightarrow$ 250 as the only currently accepted B1 fixed jump; keep B2/B3 blocked by the cycle-250 reinjection gate.
Cycle-250 reinjection gate	B2SAFE , B2SAFE_EQ , exact B0-2 , and B0_AUDIT_0250_INITIALIZATION_ONLY all failed in their first equilibration increment.	Hold all cycle-250 fixed jumps; diagnose the cycle-250 manual injected stress/state field before rerunning B2SAFE .

13 Current Conclusion

Stage 16N has successfully produced a full 1000-cycle non-jump reference and a conservative adaptive ΔN table. The inhomogeneous plate-with-hole benchmark is scientifically useful because both global hysteresis quantities and local hole-ring state variables evolve significantly. The HPC workflow is now resource-controlled with a 16-CPU production policy and explicit start/end/failure mail notifications.

The important methodological limitation is exact local reinjection. B0-1 proves that the manual SDVINI/SIGINI workflow can run and reproduce the global force-displacement response well, but it does not reproduce local strain-like state variables exactly. The cycle-100 initialization-only audit shows that this local mismatch appears immediately during manual Abaqus initialization/equilibration, even though the binary reader is exact. The new cycle-250 exact-reinjection and initialization-only failures show that the same mechanism becomes a hard equilibration gate at cycle 250.

14 Next Work

The completed dependency queue shows that a small jump from cycle 100 can work only in a narrow window: **B1D5_100_to_105_to_250** and **B1D5_EQ_100_to_105_to_250** passed with maximum primary error 2.34986%. The surrounding smaller and larger B1 variants remain review cases, including B1D1, B1D2, B1D3, B1D4, B1Q, B1S, and B1. The EQ fallback cases did not reduce the comparison errors. B0-2 and B0-3 remain on hold as exact-local-restart claims, and B2/B3 fixed jumps are also held because the cycle-250 reinjection/equilibration gate has not passed.

1. Do not submit B2/B3 yet.
2. Use the completed B1D4 pointwise diagnostic as evidence that the anomaly is not a simple phase mismatch or argmax-location swap.
3. Treat the completed B1D3 result as confirmation that cycle-100 jumps are not robust under a hard local stress-maximum criterion.
4. Use the refreshed comparison summary as the current B1 boundary result: only **B1D5** and **B1D5_EQ** pass the 5% primary-error gate.

5. Do not rerun the EQ variants just to change the equilibration initial increment; those reruns reproduced the same comparison errors.
6. Diagnose the cycle-250 reinjection/equilibration failure before rerunning B2SAFE.
7. Treat the failed BO_AUDIT_0250_INITIALIZATION_ONLY job as evidence that the cycle-250 failure appears immediately during manual initialization/equilibration.
8. Avoid or re-score cycle-100 jumps using robust percentile-based local stress metrics if hard local maxima remain too brittle for acceptance.
9. Use the submitted SDVINI-only and SIGINI-only audits to isolate whether stress, STATEV, or coupled field injection controls the cycle-250/500 equilibration barrier.
10. Keep SDV8 as a diagnostic warning metric, not a hard pass/fail metric.

A Key Repository Evidence Files

- [illegible]

- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_exact_reinj
- runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/STAGE16N_HPC_MAIL_PO