

# Stage 16N Inhomogeneous Plate-with-Hole Cycle-Jump Benchmark Living Technical Report

Master Thesis Preparation

Last updated: 2026-06-11

## Abstract

This living report records the geometry, numerical setup, HPC configuration, reference results, reinjection tests, diagnostic failures, and current conclusions for Stage 16N. The stage uses an inhomogeneous Abaqus plate-with-hole benchmark with a NEML-equivalent Chaboche UMAT. The full 1000-cycle non-jump reference has been completed and is used as the validation baseline for later fixed and adaptive cycle-jump simulations. The current fixed-jump conclusion is frozen at a narrow accepted cycle-100 jump, B1D5/B1D5\_EQ: 100  $\rightarrow$  105  $\rightarrow$  250 with 2.34986% maximum primary scalar-metric error. Larger and later manually initialized jumps remain blocked because SDVINI/SIGINI-based reinjection does not robustly reconstruct the later-cycle inhomogeneous finite-element state.

## Contents

|                                                                     |          |
|---------------------------------------------------------------------|----------|
| <b>1 Purpose and Current Status</b>                                 | <b>3</b> |
| <b>2 Geometry and Model Definition</b>                              | <b>3</b> |
| 2.1 Boundary Conditions and Loading . . . . .                       | 4        |
| <b>3 HPC and Production Policy</b>                                  | <b>4</b> |
| 3.1 Two-Job Scheduling Policy . . . . .                             | 5        |
| 3.2 Mail Notification Policy . . . . .                              | 5        |
| <b>4 Full 1000-Cycle Non-Jump Reference</b>                         | <b>5</b> |
| <b>5 Adaptive <math>\Delta N</math> Table</b>                       | <b>6</b> |
| 5.1 Reinjection-Aware Controller Update . . . . .                   | 6        |
| <b>6 Stage 16N-B: State-Initialized Continuation Verification</b>   | <b>7</b> |
| 6.1 State Reader Implementation . . . . .                           | 7        |
| <b>7 B0-1 Cycle-100 to Cycle-250 State-Initialized Continuation</b> | <b>8</b> |
| <b>8 B0-1 Local Diagnostic Review</b>                               | <b>8</b> |
| <b>9 B0 Cycle-100 Initialization-Only Audit</b>                     | <b>9</b> |
| 9.1 Initialization Audit Interpretation . . . . .                   | 9        |
| <b>10 Reinjection Error Floor and Revised Metric Policy</b>         | <b>9</b> |

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>11 Stage 16N-C Fixed State-Initialized Jump Scaffold</b>     | <b>9</b>  |
| 11.1 Prepared-Only B2 and B3 Cases . . . . .                    | 10        |
| 11.2 B1 Result . . . . .                                        | 10        |
| 11.3 B1 Jump-Size Sensitivity . . . . .                         | 11        |
| 11.4 B1D3/B1D4/B1D5 Boundary Check . . . . .                    | 11        |
| 11.5 B1D4 Pointwise Diagnostic . . . . .                        | 11        |
| 11.6 B1D3 Confirmation Result . . . . .                         | 12        |
| 11.7 Revised Local-Stress Acceptance Policy . . . . .           | 12        |
| 11.8 Unattended Dependency Queue . . . . .                      | 13        |
| 11.9 Long-Weekend Dependency Extension . . . . .                | 14        |
| 11.10 Post-Queue Check on 2026-06-07 . . . . .                  | 15        |
| 11.11 Robust Scalar-Metric Re-score . . . . .                   | 16        |
| 11.12 Limitations of Manual SDVINI/SIGINI Reinjection . . . . . | 16        |
| <b>12 Failures and Fixes</b>                                    | <b>17</b> |
| <b>13 Current Conclusion</b>                                    | <b>18</b> |
| <b>14 Next Work</b>                                             | <b>18</b> |
| <b>15 Stage 16N-R1 Restart-Enabled Reference Submission</b>     | <b>19</b> |
| 15.1 Stage 16N-R1 Completion Check on 2026-06-08 . . . . .      | 19        |
| <b>16 Stage 16N-R2 Native Restart Control Submission</b>        | <b>20</b> |
| 16.1 Stage 16N-R2 Completion Check on 2026-06-08 . . . . .      | 20        |
| 16.2 Stage 16N-R2 Follow-up Comparison . . . . .                | 21        |
| <b>17 Stage 16N-R3 Restart Debug Smoke Tests</b>                | <b>21</b> |
| <b>18 Stage 16N-R3E Exact Restart-Preserved Overwrite</b>       | <b>22</b> |
| <b>19 Stage 16N-R3J Restart-Preserved Jump Tests</b>            | <b>23</b> |
| 19.1 R3J Final Check on 2026-06-11 . . . . .                    | 24        |
| 19.2 R3J Zero-Error Audit . . . . .                             | 24        |
| 19.3 R3J +10 Cases Completed . . . . .                          | 25        |
| 19.4 R3J +20 Preparation and Cleanup-Gated Submission . . . . . | 26        |
| 19.5 R3J +20 Audit . . . . .                                    | 27        |
| 19.6 R4J Scratch-Based +50 Cycle-Skip Setup . . . . .           | 28        |
| 19.7 R4J +50 True Cycle-Skip Result . . . . .                   | 28        |
| 19.8 R4J +20 True-Skip Refinement Prepared . . . . .            | 29        |
| <b>A Key Repository Evidence Files</b>                          | <b>29</b> |

## 1 Purpose and Current Status

The purpose of Stage 16N is to move from single-element or homogeneous cycle-jump demonstrations to an inhomogeneous finite-element benchmark. The model is deliberately more demanding: a plate with a central hole produces localized cyclic plasticity near the hole, so the method must be judged not only from global reaction-force loops but also from local stress and state-variable evolution.

Table 1: Current Stage 16N infrastructure and validation status.

| Item                                    | Status                      |
|-----------------------------------------|-----------------------------|
| 1000-cycle full non-jump reference      | Completed                   |
| 16-CPU production policy                | Locked                      |
| Abaqus threaded launcher                | Verified                    |
| Adaptive $\Delta N$ table               | Completed                   |
| Exact reinjection scaffold              | Prepared                    |
| HPC mail policy                         | Fixed                       |
| B0-1 exact reinjection solver run       | Completed                   |
| B0-1 scientific result                  | Practical baseline accepted |
| B0 initialization-only audit            | Completed                   |
| B0-2 / B0-3 exact reinjection jobs      | On hold                     |
| Fixed state-initialized jump validation | Scaffold prepared           |
| Adaptive cycle-jump workflow            | On hold                     |

## 2 Geometry and Model Definition

The Stage 16N model is a three-dimensional plate-with-hole benchmark. It is intended to create localized cyclic evolution near the hole while retaining a global hysteresis response that can be compared across full-reference, exact-reinjection, fixed-jump, and adaptive-jump runs.

Table 2: Stage 16N model geometry and mesh summary.

| Quantity            | Value                         |
|---------------------|-------------------------------|
| Plate length        | 20.0                          |
| Plate height        | 10.0                          |
| Plate thickness     | 1.0                           |
| Central hole radius | 1.0                           |
| Mesh spacing        | $\Delta x = \Delta y = 0.25$  |
| Element type        | C3D8                          |
| Nodes               | 6642                          |
| Elements            | 3148                          |
| Hole-ring elements  | 60                            |
| Material model      | NEML-equivalent Chaboche UMAT |
| State variables     | 27 SDVs                       |

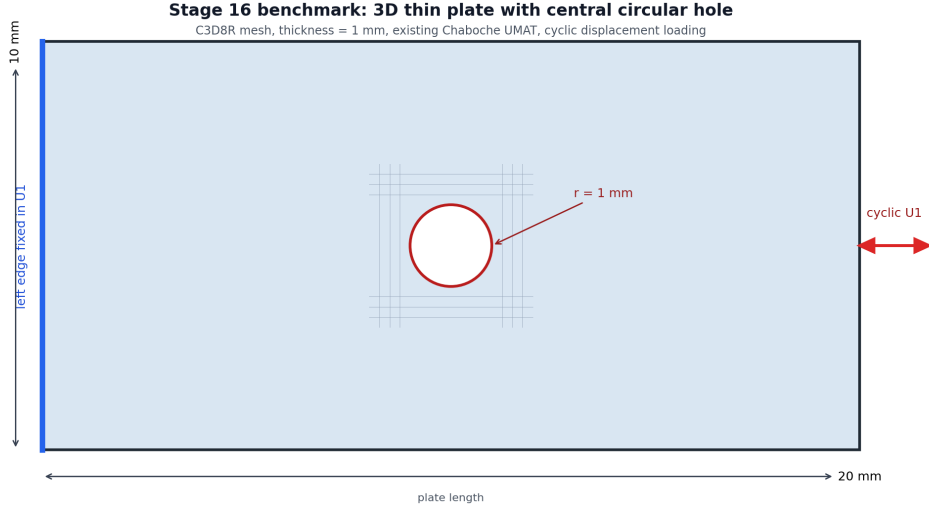


Figure 1: Plate-with-hole geometry used for the Stage 16N benchmark.

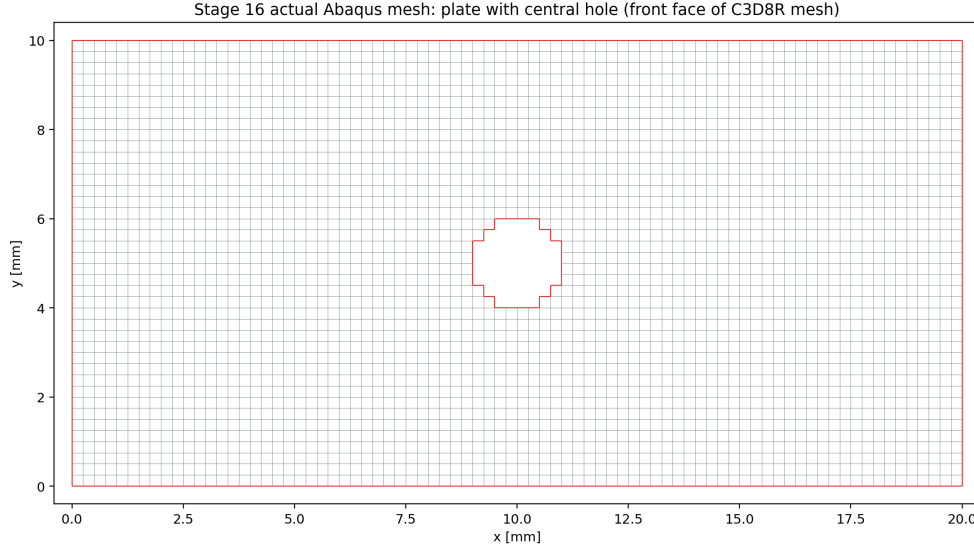


Figure 2: Actual structured C3D8 mesh with the element-wise approximation of the central hole.

## 2.1 Boundary Conditions and Loading

The left edge is fixed in the axial direction. Two anchor nodes constrain rigid-body modes. The right edge receives a cyclic axial displacement amplitude of  $\pm 0.10$ . The full reference contains 1000 full non-jump cycles. Selected field output is stored at cycles 1, 2, 10, 50, 100, 250, 500, 750, and 1000.

## 3 HPC and Production Policy

The first corrected 1000-cycle parallel reference used 30 OpenMP threads, but PBS accounting showed that the average effective CPU usage was far below the requested 30 cores. A 16-CPU verification run was therefore used to lock a more resource-efficient production policy.

Table 3: Locked Stage 16N production setting.

| Setting                        | Value                                                   |
|--------------------------------|---------------------------------------------------------|
| Production default             | 1 MPI rank $\times$ 16 OpenMP threads                   |
| PBS request                    | <code>select=1:ncpus=16:mpiprocs=1:ompthreads=16</code> |
| Abaqus launch                  | <code>cpus=16 mp_mode=threads</code>                    |
| Expected message-file line     | 1 MPI RANK $\times$ 16 THREADS                          |
| Maximum walltime per job       | 24:00:00                                                |
| Maximum simultaneous jobs      | 2                                                       |
| Maximum active Stage 16N cores | 32                                                      |

This policy is not claimed to perfectly saturate all 16 CPUs. It is a resource-efficient compromise that prevents the earlier serial fallback and avoids reserving 30 CPUs for a workload that did not use them efficiently.

### 3.1 Two-Job Scheduling Policy

From 2026-06-06 onward, Stage 16N solver planning assumes at most two simultaneous production jobs. Each job requests 16 CPU cores with one MPI rank and 16 OpenMP threads, so the intended active usage is 32 CPU cores. The two slots are used only after the relevant method gate has passed. First-time method checks, such as the first fixed cycle-jump case B1, run alone until extracted and compared. If B1 passes, B2 and B3 can be submitted together. If B1 fails badly, B2 and B3 remain held and the two slots are used instead for smaller or diagnostic B1 variants.

### 3.2 Mail Notification Policy

Future PBS jobs must explicitly request mail on abort, begin, and end:

```
#PBS -m a
#PBS -M pr21vyci@mailserver.tu-freiberg.de
```

This was added because PBS accounting previously showed `Mail.Points = a`, which only requests abort/failure mail.

## 4 Full 1000-Cycle Non-Jump Reference

The full non-jump reference was completed using Abaqus/Standard with the corrected threaded launcher.

Table 4: Completed 1000-cycle reference run.

| Quantity            | Value                                                   |
|---------------------|---------------------------------------------------------|
| PBS job             | 1335408.mmaste02                                        |
| Abaqus job          | <code>stage16n_parallel_max_reference_1000cycles</code> |
| Walltime            | 17:56:43                                                |
| CPU time            | 178:03:42                                               |
| Requested resources | 30 CPUs, 135 GB                                         |
| Abaqus parallelism  | 1 MPI rank $\times$ 30 threads                          |
| Completed cycles    | 1000                                                    |
| Last partial cycle  | none                                                    |

Table 5: Reference evolution from cycle 1 to cycle 1000.

| Quantity            | Cycle 1  | Cycle 1000 | Change  |
|---------------------|----------|------------|---------|
| RF1_max             | 2356.834 | 2908.244   | +23.40% |
| RF1_min magnitude   | 2509.712 | 3074.823   | +22.52% |
| loop_area_abs       | 433.822  | 577.068    | +33.02% |
| HOLE_RING_MISES_MAX | 398.503  | 492.827    | +23.67% |
| HOLE_RING_SDV1_MAX  | 0.0561   | 26.0519    | —       |
| HOLE_RING_SDV8_MAX  | 0.2996   | 92.4455    | —       |
| HOLE_RING_SDV11_MAX | 7.9019   | 61.3076    | —       |

The evolution clearly exceeds the original continuation thresholds for global loop quantities and local hole-ring state variables. This confirms that the plate-with-hole benchmark is meaningful for cycle-jump validation.

## 5 Adaptive $\Delta N$ Table

The adaptive  $\Delta N$  table was computed from the completed 1000-cycle reference. It uses dense global cycle metrics and selected local field-output anchors. The controlling variable is the most sensitive monitored quantity, not only the global reaction force.

Table 6: Conservative adaptive  $\Delta N$  estimates from the 1000-cycle reference.

| Base cycle | Next anchor | Target | $\Delta N$ | Controlling variable |
|------------|-------------|--------|------------|----------------------|
| 1          | 2           | 2      | 1          | HOLE_RING_SDV8_MAX   |
| 2          | 10          | 3      | 1          | HOLE_RING_SDV8_MAX   |
| 10         | 50          | 14     | 4          | HOLE_RING_SDV8_MAX   |
| 50         | 100         | 61     | 11         | HOLE_RING_SDV1_MAX   |
| 100        | 250         | 124    | 24         | HOLE_RING_SDV1_MAX   |
| 250        | 500         | 299    | 49         | HOLE_RING_SDV1_MAX   |
| 500        | 750         | 575    | 75         | HOLE_RING_SDV1_MAX   |
| 750        | 1000        | 849    | 99         | HOLE_RING_MISES_MAX  |

The table shows that local state variables near the hole strongly restrict the allowable jump size. This supports the decision that any later fixed/adaptive jump validation must include local metrics, not only global RF loops.

### 5.1 Reinjection-Aware Controller Update

After the B0 initialization audit, HOLE\_RING\_SDV8\_MAX was downgraded from a hard pass/fail controller to a diagnostic-only variable because it already shows a large mismatch immediately after manual SDVINI/SIGINI initialization. A reinjection-aware table was therefore generated with SDV8 retained in diagnostic output but removed from the hard controller list.

Table 7: Reinjection-aware adaptive  $\Delta N$  estimates with SDV8 diagnostic-only.

| Base | Next anchor | Target | $\Delta N$ | Controller          |
|------|-------------|--------|------------|---------------------|
| 1    | 2           | 2      | 1          | HOLE_RING_SDV11_MAX |
| 2    | 10          | 3      | 1          | HOLE_RING_SDV1_MAX  |
| 10   | 50          | 15     | 5          | HOLE_RING_SDV1_MAX  |
| 50   | 100         | 61     | 11         | HOLE_RING_SDV1_MAX  |
| 100  | 250         | 124    | 24         | HOLE_RING_SDV1_MAX  |
| 250  | 500         | 299    | 49         | HOLE_RING_SDV1_MAX  |
| 500  | 750         | 575    | 75         | HOLE_RING_SDV1_MAX  |
| 750  | 1000        | 849    | 99         | HOLE_RING_MISES_MAX |

The first conservative fixed-jump gate remains cycle 100 to cycle 125, followed by normal continuation to cycle 250. This row is still controlled by HOLE\_RING\_SDV1\_MAX, not by diagnostic-only SDV8.

## 6 Stage 16N-B: State-Initialized Continuation Verification

Before any real cycle jump is allowed, the workflow must prove that stress and state-variable fields can be transferred into a new Abaqus run. The route used here is manual state-initialized continuation through SDVINI/SIGINI; it is not a native Abaqus restart. The originally intended verification cases were:

- B0-1: exact cycle 100 state, continue normally to cycle 250.
- B0-2: exact cycle 250 state, continue normally to cycle 500.
- B0-3: exact cycle 500 state, continue normally to cycle 1000.

B0-2 and B0-3 remain on hold. The B0-1 and initialization-audit results are now treated as the measured reinjection baseline rather than as proof of an exact local restart.

### 6.1 State Reader Implementation

The initial CSV preload design failed under threaded Abaqus because multiple threads attempted to load the same file concurrently. The state-transfer implementation was therefore changed to a direct-access binary reader. Each record contains:

S1, S2, S3, S4, S5, S6, SDV1, ..., SDV27

The record number is:

`record = (NOEL - 1) * 8 + NPT`

On the Abaqus/Intel Fortran environment used here, direct-access RECL is interpreted in 4-byte words. Therefore the correct value for 33 double-precision values is:

`RECL = 66`

## 7 B0-1 Cycle-100 to Cycle-250 State-Initialized Continuation

B0-1 completed the Abaqus solver successfully. PBS reported exit status 2 only because the original postprocessing path failed after solver completion; extraction was rerun manually afterward.

Table 8: B0-1 run accounting and solver status.

| Quantity           | Value                                   |
|--------------------|-----------------------------------------|
| PBS job            | 1336497.mmamaster02                     |
| Route              | cycle 100 state $\rightarrow$ cycle 250 |
| PBS walltime       | 01:41:36                                |
| PBS CPU time       | 10:52:42                                |
| Requested CPUs     | 16                                      |
| Abaqus solver      | completed                               |
| Abaqus parallelism | 1 MPI rank $\times$ 16 threads          |
| Scientific status  | Practical baseline accepted             |

Table 9: B0-1 comparison against the 1000-cycle reference at cycle 250.

| Quantity              | Relative error |
|-----------------------|----------------|
| RF1_max               | 0.259048%      |
| RF1_min               | 0.687538%      |
| loop_area_abs         | 0.967300%      |
| HOLE_RING_MISES_MAX   | 7.63648%       |
| HOLE_RING_S11_MAX_ABS | 9.58753%       |
| HOLE_RING_SDV1_MAX    | 0.360172%      |
| HOLE_RING_SDV8_MAX    | 10.9164%       |
| HOLE_RING_SDV11_MAX   | 7.27213%       |

The global response is excellent, but the local hole-ring stress and state-variable errors are too large for a clean exact-restart claim.

## 8 B0-1 Local Diagnostic Review

A pointwise hole-ring diagnostic was run to determine whether the high local error was only a maximum-location artifact. It was not. The reference and reinjection maxima for **SDV8** occurred at the same element and integration point.

Table 10: B0-1 SDV8 argmax diagnostic at cycle 250.

| Quantity                | Value              |
|-------------------------|--------------------|
| Reference SDV8 argmax   | element 1242, IP 7 |
| Reinjection SDV8 argmax | element 1242, IP 7 |
| Same argmax location    | true               |
| Reference value         | 91.1466598511      |
| Reinjection value       | 81.1967315674      |
| Argmax relative error   | 10.9164%           |



This made B0-1 a real local mismatch rather than a harmless maximum-location shift.

## 9 B0 Cycle-100 Initialization-Only Audit

The initialization audit was created to answer whether the local mismatch already exists immediately after exact cycle-100 initialization, before any cycle-100 to cycle-250 continuation.

Table 11: Cycle-100 binary reader and initialization audit.

| Quantity                             | Value                   |
|--------------------------------------|-------------------------|
| CSV-vs-binary maximum absolute error | $3.55 \times 10^{-15}$  |
| Common hole-ring element/IP records  | 480                     |
| SDV8 median relative error           | 12.7022%                |
| SDV8 95th percentile relative error  | 150.665%                |
| SDV8 maximum relative error          | 479.090%                |
| SDV8 argmax location                 | same element/IP, 1242/7 |

The binary extraction and reader pipeline is correct to machine precision. Therefore the local mismatch is not caused by the Python binary writer or direct-access file format. The mismatch appears during manual Abaqus initialization and the tiny equilibrium step.

### 9.1 Initialization Audit Interpretation

The most likely interpretation is that SDVINI/SIGINI inject stress and state variables correctly, but the manual state-initialized model does not reconstruct the compatible displacement, strain, solver-history, and full equilibrium state of the original reference analysis. Strain-like local state variables such as SDV8 are therefore adjusted during the first equilibrium solve. This means B0-1 is useful as a practical state-initialized continuation test, but it is not a mathematically exact Abaqus restart for local fields.

## 10 Reinjection Error Floor and Revised Metric Policy

The B0 audit closes Stage 16N-B with the following conclusion:

Global continuation works, binary state transfer works, but local exact restart is not achieved with SDVINI/SIGINI alone.

Future fixed and adaptive jump results must separate the manual reinjection error floor from the additional error caused by cycle-jump extrapolation. The primary pass/fail metrics are RF1 maximum/minimum, loop area, global hysteresis shape, HOLE\_RING\_SDV1\_MAX, HOLE\_RING\_SDV11\_MAX, and HOLE\_RING\_MISES\_MAX. HOLE\_RING\_S11\_MAX\_ABS remains important, but it is now treated as a diagnostic warning metric rather than a sole hard rejection variable, because the B1D3/B1D4/B1D5 boundary study showed non-monotonic local stress sensitivity. HOLE\_RING\_SDV8\_MAX also remains diagnostic-only because it is already affected by initialization before any cycle-jump approximation is applied.

## 11 Stage 16N-C Fixed State-Initialized Jump Scaffold

Stage 16N-C now begins with one conservative fixed jump:

Table 12: First fixed state-initialized jump case.

| Quantity                    | Value                              |
|-----------------------------|------------------------------------|
| Case name                   | B1_100_to_125_to_250               |
| Base state                  | cycle 100                          |
| Interpreted jump target     | cycle 125                          |
| Normal Abaqus continuation  | cycles 126–250                     |
| Comparison endpoint         | cycle 250                          |
| Initial state strategy      | zero-order hold from cycle 100     |
| Baseline for interpretation | B0-1 cycle 100 to 250 continuation |

The zero-order state strategy is intentionally conservative. It measures the error added by skipping cycles 101–125 on top of the known manual reinjection floor. If this case gives acceptable global error and controlled primary local errors, the next fixed jump cases can be expanded to cycle 250 to 300, cycle 500 to 575, and cycle 750 to 850.

### 11.1 Prepared-Only B2 and B3 Cases

B2 and B3 may be prepared while B1 is running, but their solver jobs are gated by the B1 result. They must not be submitted until B1 has been extracted, compared against the 1000-cycle reference, and interpreted against the B0 reinjection baseline.

Table 13: Prepared-only fixed-jump cases held behind the B1 gate.

| Case                 | Base state | Jump target | Compare endpoint |
|----------------------|------------|-------------|------------------|
| B2_250_to_300_to_500 | cycle 250  | cycle 300   | cycle 500        |
| B3_500_to_575_to_750 | cycle 500  | cycle 575   | cycle 750        |

If B1 passes, B2 and B3 are the first paired submission under the new two-job policy. If B1 fails, the paired slots should instead be used for B1-small and B1-diagnostic variants.

### 11.2 B1 Result

B1 completed successfully as an Abaqus job, but it did not pass the fixed-jump method gate. The comparison at cycle 250 gave good global errors but unacceptable primary local state errors.

Table 14: B1 fixed-jump comparison against the 1000-cycle reference and B0 baseline.

| Quantity              | B1 total error | B0 baseline | Additional error |
|-----------------------|----------------|-------------|------------------|
| RF1_max               | 0.361433%      | 0.259048%   | 0.102384%        |
| RF1_min               | 2.27018%       | 0.687538%   | 1.58264%         |
| loop_area_abs         | 1.26223%       | 0.967300%   | 0.294934%        |
| HOLE_RING_MISES_MAX   | 2.40141%       | 7.63648%    | -5.23507%        |
| HOLE_RING_S11_MAX_ABS | 1.21869%       | 9.58753%    | -8.36884%        |
| HOLE_RING_SDV1_MAX    | 10.2916%       | 0.360172%   | 9.93139%         |
| HOLE_RING_SDV8_MAX    | 16.1769%       | 10.9164%    | 5.26047%         |
| HOLE_RING_SDV11_MAX   | 11.2777%       | 7.27213%    | 4.00560%         |

The B1 status is **review**, controlled by HOLE\_RING\_SDV11\_MAX. Therefore B2 and B3 remain held. The two-job policy should next be used for smaller or diagnostic B1 variants rather than larger fixed jumps.

### 11.3 B1 Jump-Size Sensitivity

The next two-job batches reduced the first fixed jump from cycle 100 to smaller target cycles while keeping the same comparison endpoint at cycle 250. This directly tests whether the local hole-ring error decreases when fewer cycles are skipped.

Table 15: B1 fixed-jump sensitivity at cycle 250.

| Case                  | Jump target | Skipped cycles | Status           | Controlling quantity  |
|-----------------------|-------------|----------------|------------------|-----------------------|
| B1Q_100_to_106_to_250 | 106         | 6              | review, 5.75372% | HOLE_RING_MISES_MAX   |
| B1S_100_to_112_to_250 | 112         | 12             | review, 9.34203% | HOLE_RING_S11_MAX_ABS |
| B1_100_to_125_to_250  | 125         | 25             | review, 11.2777% | HOLE_RING_SDV11_MAX   |

The sensitivity study confirms that the original jump from cycle 100 to 125 was too aggressive for local hole-ring variables. Reducing the target to cycle 106 reduced the maximum primary error to approximately 5.75%, but this remained above the strict 5% gate. The useful scientific conclusion is that the adaptive jump-size estimate near cycle 100 was too optimistic and must be reduced by an early-cycle safety factor. Since the reinjection-aware table suggested approximately  $\Delta N \approx 24$  at cycle 100, the practical early safety factor is approximately

$$\frac{5}{24} \approx 0.21.$$

This supports an early-cycle safety-factor range of approximately 0.20–0.25, controlled by local field quantities rather than by RF1 alone.

### 11.4 B1D3/B1D4/B1D5 Boundary Check

A stricter boundary check was then performed with target cycles 103, 104, and 105. The result is useful, but non-monotonic:

Table 16: B1D3/B1D4/B1D5 boundary check at cycle 250.

| Case                   | Jump target | Skipped cycles | Status           | Controlling quantity  |
|------------------------|-------------|----------------|------------------|-----------------------|
| B1D3_100_to_103_to_250 | 103         | 3              | review, 9.13095% | HOLE_RING_S11_MAX_ABS |
| B1D4_100_to_104_to_250 | 104         | 4              | review, 9.34307% | HOLE_RING_S11_MAX_ABS |
| B1D5_100_to_105_to_250 | 105         | 5              | pass, 2.34986%   | HOLE_RING_SDV1_MAX    |
| B1Q_100_to_106_to_250  | 106         | 6              | review, 5.75372% | HOLE_RING_MISES_MAX   |

B1D5 remains a useful successful case:

100 -> 105 -> 250, with maximum primary error 2.34986%.

However, B1D3 and B1D4 both failed under the local stress criterion even though they used shorter jumps. B1D3 was controlled by HOLE\_RING\_S11\_MAX\_ABS at 9.13095%, and B1D4 was controlled by the same metric at 9.34307%. Therefore the cycle-100 boundary is not robust under a hard local-stress maximum criterion. The isolated B1D5 pass should not be generalized as a universal accepted early-cycle rule.

### 11.5 B1D4 Pointwise Diagnostic

B1D4 was diagnosed at the hole-ring element/integration-point level using the 1000-cycle reference ODB and the B1D4 ODB at cycle 250. The diagnostic compared 480 common hole-ring element/IP records and checked both pointwise errors and argmax locations.

Table 17: B1D4 pointwise diagnostic summary at cycle 250.

| Variable | Mean error | Median error | 95th percentile | Max pointwise error |
|----------|------------|--------------|-----------------|---------------------|
| S11_ABS  | 13.8050%   | 11.6186%     | 35.2953%        | 121.4232%           |
| MISES    | 8.05921%   | —            | —               | —                   |
| SDV1     | 1.64737%   | —            | —               | —                   |
| SDV8     | 131.337%   | —            | —               | —                   |
| SDV11    | 50.4912%   | —            | —               | —                   |

For the controlling stress metric, the reference and B1D4 argmax location were the same:

S11\_ABS argmax element/IP = 1242/7 in both the reference and B1D4.

The global phase check did not show a cycle-phase mismatch. Both runs used CYCLE\_0250; the cycle had local time from 0 to 1, displacement extrema matched exactly, and the global loop-area error was only 0.107074%. Therefore the B1D4 failure is not explained by a simple output-phase or step-numbering mismatch. It appears to be a real local stress/reinjection sensitivity in the B1D4 path.

This keeps the conservative decision unchanged: B1D5 is a useful pass case, but B1D3 and B1D4 show that the early-cycle jump boundary is not robust when local stress extrema are treated as hard primary rejection variables.

## 11.6 B1D3 Confirmation Result

B1D3 completed successfully as an Abaqus job and was compared against the 1000-cycle reference at cycle 250. It did not pass the fixed-jump gate.

Table 18: B1D3 comparison against the 1000-cycle reference at cycle 250.

| Quantity              | Relative error |
|-----------------------|----------------|
| RF1_max               | 1.45771%       |
| RF1_min               | 0.661665%      |
| loop_area_abs         | 0.214351%      |
| HOLE_RING_MISES_MAX   | 7.43637%       |
| HOLE_RING_S11_MAX_ABS | 9.13095%       |
| HOLE_RING_SDV1_MAX    | 1.52456%       |
| HOLE_RING_SDV8_MAX    | 9.68802%       |
| HOLE_RING_SDV11_MAX   | 5.43394%       |

B1D3 confirms that the B1D4 behavior is not an isolated single-case artifact. The global response remains accurate, but the local hole-ring stress maximum and SDV11 response exceed the strict local threshold. The current interpretation is therefore:

Early-cycle jumping from cycle 100 is not robust under local stress-maximum acceptance. The pass at cycle 105 is useful evidence that small jumps can work, but the non-monotonic failures at cycles 103 and 104 require a more careful local acceptance strategy or a later-start jump strategy.

## 11.7 Revised Local-Stress Acceptance Policy

The B1D3/B1D4/B1D5 boundary is scientifically important because it shows that smaller jumps are not always better when judged by a single local stress maximum. The robust conclusion is:

Global hysteresis quantities are robust, but local stress-maximum metrics near the hole are non-monotonic and highly sensitive to manual state initialization and re-equilibration.

Therefore, `HOLE_RING_S11_MAX_ABS` is retained and reported, but it should not be used as the only hard pass/fail metric. The revised three-level metric strategy is:

- Primary pass/fail: RF1 extrema, loop area, `HOLE_RING_SDV1_MAX`, `HOLE_RING_SDV11_MAX`, and `HOLE_RING_MISES_MAX`.
- Secondary/diagnostic: `HOLE_RING_S11_MAX_ABS`, single-point stress maxima, and `SDV8`.
- Robust local-field additions: mean/median, 95th percentile, or 99th percentile hole-ring stress errors from pointwise distributions.

This does not hide the local stress sensitivity. It reports it as evidence that local extrema are more restrictive and less stable than global hysteresis metrics.

The current reporting conclusion is:

The B1 sensitivity study showed that the original jump from cycle 100 to 125 was too aggressive for the local hole-ring variables. Reducing the jump to cycle 105 gave an acceptable maximum primary error of 2.35%, but the cycle 103 and 104 cases both produced non-monotonic local stress errors controlled by `HOLE_RING_S11_MAX_ABS`. Therefore, early-cycle jumping from cycle 100 cannot yet be accepted as robust under a hard local stress-maximum criterion.

B2 and B3 remain held. The next two-job policy is therefore used for one smaller cycle-100 diagnostic jump and one later-cycle safe pilot, rather than for the original larger fixed jumps.

Table 19: Next two-job diagnostic pair submitted after the B1D3 result.

| Case                        | Route           | Purpose                         | PBS job             |
|-----------------------------|-----------------|---------------------------------|---------------------|
| B1D2_100_to_102_to_250      | 100 → 102 → 250 | cycle-100 hard-stress check     | 1341026.mmamaster02 |
| B2SAFE_250_to_260_to_500    | 250 → 260 → 500 | later-start safe pilot          | 1341027.mmamaster02 |
| B2SAFE_EQ_250_to_260_to_500 | 250 → 260 → 500 | smaller equilibration increment | 1341028.mmamaster02 |

The first B2SAFE submission failed after datacheck during `FIXED_JUMP_EQILIBRATE_TO_CYCLE_0260`. Abaqus reported slow force convergence and `TOO MANY ATTEMPTS MADE FOR THIS INCREMENT`. A distinct rerun case, `B2SAFE_EQ_250_to_260_to_500`, reduced the equilibration initial increment from  $1.0 \times 10^{-6}$  to  $1.0 \times 10^{-8}$ , but it failed in the same first equilibration step after cutbacks to  $6.25 \times 10^{-10}$ . This is a useful result by itself: the later cycle-250 reinjection point is numerically more difficult to equilibrate than the cycle-100 cases, and it requires an explicit cycle-250 reinjection/equilibration diagnostic before B2-safe can be interpreted scientifically.

## 11.8 Unattended Dependency Queue

The unattended queue was reorganized into two dependency-controlled streams so that at most two 16-CPU jobs can run at once while preserving the scientific gates.

Table 20: Dependency-controlled unattended queue.

| Stream | Case                              | PBS job            | Dependency/status                   |
|--------|-----------------------------------|--------------------|-------------------------------------|
| A      | B1D2_100_to_102_to_250            | 1341026.mmmaster02 | running                             |
| A      | B1D1_100_to_101_to_250            | 1341029.mmmaster02 | <b>afterany:1341026</b>             |
| B      | B0_250_to_500                     | 1341033.mmmaster02 | failed in reinjection equilibration |
| B      | B2D2_250_to_252_to_500            | 1341034.mmmaster02 | afterok not satisfied               |
| B      | B2D5_250_to_255_to_500            | 1341035.mmmaster02 | afterok not satisfied               |
| B      | B0_AUDIT_0250_INITIALIZATION_ONLY | 1341036.mmmaster02 | failed in equilibration             |

The first B0-2 exact-reinjection submission, 1341030.mmmaster02, exited with status 126 because the PBS script had CRLF line endings and invoked `/bin/bash^M`. Its dependent jobs 1341031 and 1341032 did not run as meaningful solver jobs. The exact-reinjection submit writer was corrected to write LF-only PBS scripts, the remote PBS file was normalized, and Stream B was resubmitted as jobs 1341033–1341035.

The corrected B0-2 job, 1341033.mmmaster02, then ran Abaqus and failed during the first REINJECTION\_EQUILIBRATE increment with TOO MANY ATTEMPTS MADE FOR THIS INCREMENT. Therefore B2D2 and B2D5 correctly remained blocked by their **afterok** dependencies. The Stream B replacement, B0\_AUDIT\_0250\_INITIALIZATION\_ONLY job 1341036.mmmaster02, also failed in its first initialization/equilibration increment after cutbacks to  $6.25 \times 10^{-11}$ . This means the cycle-250 problem is not a jump-size result: exact cycle-250 manual state injection cannot yet be equilibrated robustly.

## 11.9 Long-Weekend Dependency Extension

Because the user will be away for more than 40 hours, the unattended queue was extended with additional scientifically safe diagnostics. The queue still preserves the two-job policy: only one Stream A job and one Stream B job can run at a time, and every job requests 16 CPUs, 90 GB, and 24 hours.

Table 21: Extended long-weekend queue.

| Stream | Case                              | PBS job            | Dependency/status       |
|--------|-----------------------------------|--------------------|-------------------------|
| A      | B1D2_100_to_102_to_250            | 1341026.mmmaster02 | running                 |
| A      | B1D1_100_to_101_to_250            | 1341029.mmmaster02 | <b>afterany:1341026</b> |
| A      | B1D2_EQ_100_to_102_to_250         | 1341037.mmmaster02 | <b>afterany:1341029</b> |
| A      | B1D1_EQ_100_to_101_to_250         | 1341038.mmmaster02 | <b>afterany:1341037</b> |
| B      | B0_AUDIT_0500_INITIALIZATION_ONLY | 1341039.mmmaster02 | running                 |
| B      | B0_AUDIT_0250_SDVINI_ONLY         | 1341040.mmmaster02 | <b>afterany:1341039</b> |
| B      | B0_AUDIT_0250_SIGINI_ONLY         | 1341041.mmmaster02 | <b>afterany:1341040</b> |
| B      | B0_AUDIT_0500_SDVINI_ONLY         | 1341042.mmmaster02 | <b>afterany:1341041</b> |
| B      | B0_AUDIT_0500_SIGINI_ONLY         | 1341043.mmmaster02 | <b>afterany:1341042</b> |

The two B1D\*\_EQ jobs are fallback diagnostics with a smaller equilibration initial increment. They should be interpreted as numerical sensitivity checks for the cycle-100 boundary, not as authorization to submit B2/B3. The Stream B audit jobs split the manual cycle-250 and cycle-500 state injection into full, SDVINI-only, and SIGINI-only variants. This should identify whether the cycle-250/500 equilibration barrier is driven primarily by STATEV injection, stress injection, or the coupled manual restart.

The Stream B injection-only diagnostics completed quickly and all returned exit status 1. Therefore, a second B1-only EQ stream was submitted into the free slot. This keeps the cluster

at the intended two active 16-core jobs while continuing to avoid B2/B3.

Table 22: Final long-weekend live and queued jobs.

| Stream | Case                      | PBS job           | Dependency/status |
|--------|---------------------------|-------------------|-------------------|
| A      | B1D2_100_to_102_to_250    | 1341026.mmaster02 | running           |
| A      | B1D1_100_to_101_to_250    | 1341029.mmaster02 | afterany:1341026  |
| A      | B1D2_EQ_100_to_102_to_250 | 1341037.mmaster02 | afterany:1341029  |
| A      | B1D1_EQ_100_to_101_to_250 | 1341038.mmaster02 | afterany:1341037  |
| A      | B1D3_EQ_100_to_103_to_250 | 1341044.mmaster02 | afterany:1341038  |
| A      | B1D4_EQ_100_to_104_to_250 | 1341045.mmaster02 | afterany:1341044  |
| A      | B1D5_EQ_100_to_105_to_250 | 1341046.mmaster02 | afterany:1341045  |
| C      | B1Q_EQ_100_to_106_to_250  | 1341047.mmaster02 | running           |
| C      | B1S_EQ_100_to_112_to_250  | 1341048.mmaster02 | afterany:1341047  |
| C      | B1_EQ_100_to_125_to_250   | 1341049.mmaster02 | afterany:1341048  |

The final live/queued solver count after this extension was 10 jobs: 2 running and 8 held by dependencies. The active requested resource load was therefore  $2 \times 16 = 32$  CPU cores.

### 11.10 Post-Queue Check on 2026-06-07

The long-weekend queue had drained by the 2026-06-07 check: `qstat -u pr21vyci` returned no active jobs. The PBS extended-history query with `qstat -x -f` no longer exposed the listed job IDs, returning `Unknown Job Id` for 1341026, 1341029, 1341037, 1341038, 1341044–1341049, and the audit jobs 1341039–1341043. Therefore the final job assessment below is based on the completed run artifacts in the remote Stage 16N directory and the refreshed comparison CSVs, not on retained PBS accounting records.

Table 23: Final fixed-jump comparison after the dependency queue drained.

| Case    | Route           | Status | Max primary error | Controller |
|---------|-----------------|--------|-------------------|------------|
| B1D1    | 100 → 101 → 250 | review | 8.70868%          | SDV11      |
| B1D1_EQ | 100 → 101 → 250 | review | 8.70868%          | SDV11      |
| B1D2    | 100 → 102 → 250 | review | 8.79420%          | SDV11      |
| B1D2_EQ | 100 → 102 → 250 | review | 8.79420%          | SDV11      |
| B1D3    | 100 → 103 → 250 | review | 7.43637%          | MISES      |
| B1D3_EQ | 100 → 103 → 250 | review | 7.43637%          | MISES      |
| B1D4    | 100 → 104 → 250 | review | 7.54718%          | SDV11      |
| B1D4_EQ | 100 → 104 → 250 | review | 7.54718%          | SDV11      |
| B1D5    | 100 → 105 → 250 | pass   | 2.34986%          | SDV1       |
| B1D5_EQ | 100 → 105 → 250 | pass   | 2.34986%          | SDV1       |
| B1Q     | 100 → 106 → 250 | review | 5.75372%          | MISES      |
| B1Q_EQ  | 100 → 106 → 250 | review | 5.75372%          | MISES      |
| B1S     | 100 → 112 → 250 | review | 7.63033%          | SDV11      |
| B1S_EQ  | 100 → 112 → 250 | review | 7.63033%          | SDV11      |
| B1      | 100 → 125 → 250 | review | 11.27770%         | SDV11      |
| B1_EQ   | 100 → 125 → 250 | review | 11.27770%         | SDV11      |

The smaller-equilibration EQ reruns reproduced the same comparison errors as their non-EQ counterparts. This is important: the cycle-100 B1 jump-size trend is controlled by the physical/local state mismatch relative to the 1000-cycle reference, not by the initial equilibration

increment used in the fixed-jump continuation. Under the current 5% primary-error gate, only the  $100 \rightarrow 105 \rightarrow 250$  case passes; the  $100 \rightarrow 106$  and larger jumps remain above threshold, and the  $100 \rightarrow 101/102/103/104$  cases still show local-state or Mises review errors.

The later-cycle fixed-jump candidates B2, B2SAFE, B2SAFE\_EQ, B2D2, B2D5, and B3 remain **missing\_outputs**. This is expected because the cycle-250 exact-reinjection/equilibration gate failed and the unsafe dependent jobs were not allowed to produce accepted fixed-jump validations.

### 11.11 Robust Scalar-Metric Re-score

The completed B1/B1\_EQ family was re-scored with robust scalar statistics: mean, median, 95th percentile, 99th percentile, and maximum relative error. This re-score uses the lightweight scalar metrics retained in the repository. It is not yet a full pointwise field-percentile study because complete per-integration-point fields were not retained for every B1 case. Loop errors were normalized by the full reference loop amplitude for `U1_avg` and `RF1_sum`, avoiding artificial blow-ups at zero crossings.

Table 24: Robust scalar-metric re-score for representative B1 cases.

| Case    | Mean      | Median    | p95      | p99      | Max      | Status                  |
|---------|-----------|-----------|----------|----------|----------|-------------------------|
| B1D1    | 2.97163%  | 1.77699%  | 7.47991% | 8.46293% | 8.70868% | review                  |
| B1D3    | 2.78810%  | 1.49114%  | 6.93576% | 7.33625% | 7.43637% | review                  |
| B1D5    | 0.392238% | 0.000247% | 1.76313% | 2.23251% | 2.34986% | pass by max             |
| B1D5_EQ | 0.392238% | 0.000247% | 1.76313% | 2.23251% | 2.34986% | pass by max             |
| B1Q     | 2.54352%  | 2.34673%  | 4.99948% | 5.60287% | 5.75372% | robust pass, max review |
| B1Q_EQ  | 2.54352%  | 2.34673%  | 4.99948% | 5.60287% | 5.75372% | robust pass, max review |
| B1S     | 3.65193%  | 3.12240%  | 7.50946% | 7.60616% | 7.63033% | review                  |
| B1      | 4.64409%  | 2.33580%  | 11.0312% | 11.2284% | 11.2777% | review                  |

The robust scalar re-score supports the same conservative conclusion as the hard maximum-error gate. B1D5 and B1D5\_EQ are the only clean passes. B1Q and B1Q\_EQ are scientifically interesting because their primary p95 error is just below 5%, but their maxima still exceed the 5% gate. Therefore they should be treated as borderline review cases unless a later full-field percentile acceptance rule is deliberately adopted.

### 11.12 Limitations of Manual SDVINI/SIGINI Reinjection

The later-cycle diagnostics show that the bottleneck is no longer only jump size. Manual SDVINI/SIGINI reinjection starts a scratch Abaqus model with injected stress and state variables, but it does not preserve the compatible displacement field, strain field, equilibrium state, solver history, or tangent/history information of the original inhomogeneous analysis. At cycle 100 this route is good enough for a narrow global-response demonstration. At cycle 250 and cycle 500 it failed before valid physical continuation in exact, SDVINI-only, SIGINI-only, and combined diagnostics.

This is a thesis-useful limitation result: manual state initialization is not robust enough for later-cycle reinjection in the plate-with-hole benchmark. Repeating B2/B3 jobs with the same scratch SDVINI/SIGINI route is therefore not expected to add scientific value. The next path is Stage 16N-R, a reinjection-strategy repair that preserves Abaqus' finite-element state through native restart or in-analysis continuation and applies the cycle jump only to independent material memory variables.



## 12 Failures and Fixes

Table 25: Important failures and fixes recorded in Stage 16N.

| Issue                             | Observation                                                                                                                  | Fix / conclusion                                                                                                                |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Accidental serial-like run        | A 22-hour run reached only 592 full cycles.                                                                                  | Parallel launcher corrected; later 1000-cycle reference completed.                                                              |
| 30-CPU over-allocation            | 30-thread run averaged about 10 effective cores.                                                                             | 16 CPUs selected as production compromise.                                                                                      |
| Missing start/end email           | PBS accounting showed <code>MailPoints = a</code> .                                                                          | Added <code>#PBS -m a</code> and mail user to Stage 16N submit scripts.                                                         |
| CSV state-reader race             | Threaded Abaqus calls attempted concurrent CSV preload.                                                                      | Replaced with direct-access binary state reader.                                                                                |
| Wrong direct-access record length | Abaqus/Intel runtime expected word-based RECL.                                                                               | Set <code>RECL = 66</code> for 33 double values.                                                                                |
| Postprocessing path failure       | B0-1 solver completed but PBS exit status was 2.                                                                             | Fixed extractor path and reran extraction manually.                                                                             |
| B0-1 local mismatch               | Global errors under 1%, local <code>SDV8</code> max error 10.9164%.                                                          | Added pointwise diagnostic and initialization-only audit.                                                                       |
| Initialization local mismatch     | Binary audit passed, but <code>SDV8</code> mismatch appeared immediately.                                                    | Concluded manual <code>SDVINI/SIGINI</code> is not a mathematically exact local restart.                                        |
| Metric policy mismatch            | Original adaptive table allowed <code>SDV8</code> to act as a hard controller.                                               | Added reinjection-aware table with <code>SDV8</code> diagnostic-only.                                                           |
| B1 fixed-jump gate                | Global B1 errors were small, but <code>SDV1</code> and <code>SDV11</code> primary local errors exceeded 10%.                 | Hold B2/B3 and use the two-job policy for smaller/debug B1 variants.                                                            |
| B1D4/B1D5 non-monotonic boundary  | B1D5 passed at 2.34986%, but B1D4 failed at 9.34307% controlled by <code>S11</code> .                                        | Accept 100 -> 105 only with diagnostic confirmation; diagnose B1D4 before B2/B3.                                                |
| B1D4 pointwise diagnostic         | B1D4 and the reference share the same <code>S11.ABS</code> argmax location, and median/p95 stress errors are not negligible. | Treat B1D4 as real local stress sensitivity, not a simple phase or argmax-swap artifact.                                        |
| B1D3 confirmation                 | B1D3 also failed at 9.13095%, controlled by <code>S11.ABS</code> .                                                           | Do not generalize the B1D5 pass; treat cycle-100 jumping as not robust under hard local stress maxima.                          |
| Metric policy revision            | <code>S11.MAX_ABS</code> is non-monotonic across B1D3/B1D4/B1D5.                                                             | Keep <code>S11</code> maxima as diagnostic warnings; use global, STATEV, and Mises-type metrics as primary acceptance controls. |

| Issue                         | Observation                                                                                                                | Fix / conclusion                                                                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Completed B1 dependency queue | The drained queue shows B1D5 and B1D5_EQ pass at 2.34986%, while all other completed B1-size variants remain review cases. | Treat 100 $\rightarrow$ 105 $\rightarrow$ 250 as the only currently accepted B1 fixed jump; keep B2/B3 blocked by the cycle-250 reinjection gate. |
| Cycle-250 reinjection gate    | B2SAFE, B2SAFE_EQ, exact B0-2, and B0_AUDIT_0250_INITIALIZATION_ONLY all failed in their first equilibration increment.    | Hold all cycle-250 fixed jumps; diagnose the cycle-250 manually injected stress/state field before rerunning B2SAFE.                              |

## 13 Current Conclusion

Stage 16N has successfully produced a full 1000-cycle non-jump reference and a conservative adaptive  $\Delta N$  table. The inhomogeneous plate-with-hole benchmark is scientifically useful because both global hysteresis quantities and local hole-ring state variables evolve significantly. The HPC workflow is resource-controlled with a 16-CPU production policy and explicit start/end/failure mail notifications.

The fixed-jump result is now frozen as Stage 16N-C. The cycle-jump method can work in the inhomogeneous Abaqus model, but only for a very conservative early jump: B1D5/B1D5\_EQ, 100  $\rightarrow$  105  $\rightarrow$  250, with 2.34986% maximum primary scalar-metric error. The adaptive cycle-100 table estimated  $\Delta N \approx 24$ , while the accepted observed jump is  $\Delta N = 5$ , giving an effective safety factor of about  $5/24 \approx 0.21$ . Thus the thesis-safe result is that adaptive  $\Delta N$  estimates must be strongly reduced when applied to the inhomogeneous plate-with-hole benchmark. Local hole-ring stress and STATEV extrema are much more restrictive than the global hysteresis response.

The important methodological limitation is exact local reinjection. B0-1 proves that the manual SDVINI/SIGINI workflow can run and reproduce the global force-displacement response well near cycle 100, but it does not reproduce local strain-like state variables exactly. The cycle-100 initialization-only audit shows that this local mismatch appears immediately during manual Abaqus initialization/equilibration, even though the binary reader is exact. The cycle-250 and cycle-500 exact, SDVINI-only, SIGINI-only, and combined diagnostic failures show that the same mechanism becomes a hard equilibration gate at later cycles. The next scientific path is therefore not more scratch state-initialized B2/B3 jobs, but Stage 16N-R: a restart-preserved material-state jumping strategy.

## 14 Next Work

The completed dependency queue shows that a small jump from cycle 100 can work only in a narrow window: B1D5\_100\_to\_105\_to\_250 and B1D5\_EQ\_100\_to\_105\_to\_250 passed with maximum primary error 2.34986%. The surrounding smaller and larger B1 variants remain review cases, including B1D1, B1D2, B1D3, B1D4, B1Q, B1S, and B1. The EQ fallback cases did not reduce the comparison errors. B0-2 and B0-3 remain on hold as exact-local-restart claims, and B2/B3 fixed jumps are also held because the cycle-250 reinjection/equilibration gate has not passed. The next work is the Stage 16N-R repair path.

1. Freeze Stage 16N-C as a validated small-jump demonstration plus a limitation study of manual reinjection.

2. Do not submit B2/B3/B3SAFE/B4SAFE with the current scratch SDVINI/SIGINI route.
3. Use the robust scalar re-score as supporting evidence: only B1D5 and B1D5\_EQ pass the hard 5% maximum primary-error gate; B1Q/B1Q\_EQ remain borderline review cases.
4. Treat the completed STATEV independence audit as the first Stage 16N-R artifact. Independent memory variables are STATEV(1), STATEV(2:19), and STATEV(20:25); STATEV(26) is derived from alpha and STATEV(27) is increment-local/diagnostic.
5. Prepare a restart-enabled reference or checkpoint run because no local usable .res/.stt/.mdl/.sim restart files were found for the completed Stage 16N reference.
6. Run a native Abaqus restart control before any new jump: continue from checkpoint without memory overwrite and compare 250 → 500 and 500 → 1000 against the full reference.
7. Implement restart-preserved material-memory overwrite only after the native restart control passes, and modify only the independent material memory variables inside the UMAT.
8. Then retry later jumps with the preserved FE state, starting with small controlled jumps rather than the original B2/B3 queue.

## 15 Stage 16N-R1 Restart-Enabled Reference Submission

Stage 16N-R1 was started on 2026-06-07 to create native Abaqus restart files before any restart-preserved UMAT overwrite is attempted. Two ordinary no-jump reference jobs were generated and submitted under the two-job policy:

Table 26: Stage 16N-R1 restart-enabled reference jobs.

| Case | PBS job          | Abaqus job                         | Target     | Restart checkpoints |
|------|------------------|------------------------------------|------------|---------------------|
| R1B  | 1341177.mmaste02 | stage16n_r1b_restart_ref_250cycles | 250 cycles | 100, 250            |
| R1A  | 1341178.mmaste02 | stage16n_r1a_restart_ref_500cycles | 500 cycles | 100, 250, 500       |

Both jobs request `select=1:ncpus=16:mpiprocs=1:ompthreads=16:mem=90gb, walltime=24:00:00`, and run Abaqus with `cpus=16 mp_mode=threads`. The first attempted submissions, 1341175.mmaste02 and 1341176.mmaste02, failed before Abaqus started because the generated per-case shell runner had Windows CRLF line endings. The runner was corrected to write LF line endings explicitly, the remote copies were normalized, and the corrected jobs were submitted as 1341177.mmaste02 and 1341178.mmaste02. At the first `qstat -f` check both corrected jobs were running.

The acceptance condition for this substage is not a cycle-jump error threshold. It is the existence of usable native Abaqus restart files from the 250-cycle and 500-cycle checkpoint references. Only after those restart sources exist should native restart continuation tests be prepared.

### 15.1 Stage 16N-R1 Completion Check on 2026-06-08

Both restart-enabled reference analyses completed successfully as Abaqus jobs. PBS marked the jobs with exit status 2 because the post-run status-file shell block failed after extraction; this was a scripting issue, not a solver failure. The .sta files for both jobs end with `THE ANALYSIS HAS COMPLETED SUCCESSFULLY`, and both logs show `1 MPI RANK x 16 THREADS`.

Table 27: Stage 16N-R1 completed job accounting.

| Case | PBS job          | Walltime | CPU time | CPU percent | PBS status              |
|------|------------------|----------|----------|-------------|-------------------------|
| R1B  | 1341177.mmaste02 | 03:13:22 | 18:58:17 | 655         | exit 2 after extraction |
| R1A  | 1341178.mmaste02 | 08:32:36 | 43:30:54 | 661         | exit 2 after extraction |

Native restart files now exist. The 250-cycle reference produced `.res` (29 MB), `.mdl` (50 MB), `.sim` (1.6 MB), and `.stt` (226 GB). The 500-cycle reference produced `.res` (78 MB), `.mdl` (107 MB), `.sim` (1.6 MB), and `.stt` (1.1 TB). These large `.stt` files should not be deleted until native restart continuation has been tested.

The extracted endpoint global metrics match the existing 1000-cycle reference exactly at the checked cycles. For R1B at cycle 250 and R1A at cycle 500, the shared `U1_max`, `U1_min`, `RF1_max`, `RF1_min`, and `loop_area_abs` errors are all 0%. Therefore Stage 16N-R1 achieved its immediate purpose: FE-consistent native restart source files now exist and the restart-enabled no-jump runs reproduce the existing reference metrics at the endpoints.

The next substage should be native restart continuation control with no UMAT overwrite: restart from cycle 100 and continue to 250, then restart from cycle 250 and continue to 500. Only after those native restart continuations pass should restart-preserved UMAT memory overwrite be implemented.

## 16 Stage 16N-R2 Native Restart Control Submission

Stage 16N-R2 was prepared on 2026-06-08 as the next gate after the restart-enabled R1 references. The purpose is to test native Abaqus restart continuation with no `SDVINI/SIGINI` scratch reinjection and no UMAT memory overwrite. This directly checks whether Abaqus can preserve the finite-element displacement, strain, equilibrium, solver-history, and material state from its own restart files.

Table 28: Stage 16N-R2 native restart control jobs.

| Case | PBS job          | Restart read     | Continuation | Scientific status                |
|------|------------------|------------------|--------------|----------------------------------|
| R2C1 | 1341284.mmaste02 | step 100, inc 53 | 100 → 250    | pass after follow-up postprocess |
| R2C2 | 1341285.mmaste02 | step 250, inc 58 | 250 → 500    | pass after follow-up postprocess |

Both corrected jobs request `select=1:ncpus=16:mpiprocs=1:ompthreads=16:mem=90gb, walltime=24:00:00`, and run Abaqus with `cpus=16 mp_mode=threads`. The first submitted R2 attempt, 1341282.mmaste02 and 1341283.mmaste02, failed during Abaqus datacheck because the oldjob `.odb` file was not symlinked into the restart case folders. This was a restart-setup issue, not a solver result. The link script was corrected to expose the oldjob `.odb` together with `.res`, `.stt`, `.mdl`, `.sim`, and `.prt`; the corrected submissions then ran to completion.

### 16.1 Stage 16N-R2 Completion Check on 2026-06-08

PBS history shows that both native restart control jobs finished with `Exit_status = 1`; however, both Abaqus solver runs completed successfully. Follow-up extraction and comparison then completed on HPC, and the scientific restart-control gate passed.

Table 29: Stage 16N-R2 finished job accounting.

| Case | Walltime | CPU time | CPU percent | Mem        | Vmem      | Finish time             |
|------|----------|----------|-------------|------------|-----------|-------------------------|
| R2C1 | 01:55:33 | 11:15:42 | 639         | 94374872kb | 5116372kb | Mon Jun 8 08:42:46 2026 |
| R2C2 | 03:43:52 | 20:26:04 | 643         | 94375848kb | 8489656kb | Mon Jun 8 10:31:06 2026 |

The full PBS accounting for R2C1 records `ctime` = Mon Jun 8 06:47:01 2026, `stime` = Mon Jun 8 06:47:09 2026, `exec_host` = `mnode100/0*0`, and `Exit_status` = 1. The full PBS accounting for R2C2 records `ctime` = Mon Jun 8 06:47:01 2026, `stime` = Mon Jun 8 06:47:07 2026, `exec_host` = `mnode101/0*0`, and `Exit_status` = 1. The nonzero PBS status is classified as wrapper/postprocessing failure, not Abaqus restart failure.

## 16.2 Stage 16N-R2 Follow-up Comparison

Manual follow-up postprocessing produced `stage16n_native_restart_comparison_summary.csv` in both R2 case folders. The R2C1 comparison at cycle 250 reports `status` = `pass`, `max_global_error_pct` = 0, and `max_primary_local_error_pct` = 0. The R2C2 comparison at cycle 500 reports the same values. This confirms that native Abaqus restart can preserve the inhomogeneous finite-element state and reproduce the 1000-cycle reference exactly at the checked continuation endpoints.

## 17 Stage 16N-R3 Restart Debug Smoke Tests

Stage 16N-R3D was run as a minimal native restart diagnostic after the R2 wrapper/postprocessing failure. The aim was to preserve the Abaqus finite-element restart state and inspect the first UMAT calls after restart before implementing any material-memory overwrite.

Table 30: Stage 16N-R3D restart debug jobs.

| Case | PBS job          | Restart | Target | Solver    | Debug | Exit |
|------|------------------|---------|--------|-----------|-------|------|
| R3D1 | 1341601.mmaste02 | 250     | 251    | completed | pass  | 0    |
| R3D2 | 1341602.mmaste02 | 500     | 501    | completed | pass  | 0    |

PBS history was checked on 2026-06-09. Both jobs used `select=1:ncpus=16:mpiprocs=1:ompthreads=16:Resource_List.ncpus = 16,Resource_List.mpiprocs = 1,Resource_List.mem = 90gb`, and `Resource_List.walltime = 24:00:00`. R3D1 ran on `mnode100/0*0`, with `ctime` = Mon Jun 8 12:35:10 2026, `stime` = Mon Jun 8 12:35:12 2026, `mtime` = Mon Jun 8 12:36:22 2026, `resources_used.walltime` = 00:01:04, `resources_used.cput` = 00:04:30, `resources_used.cputpercent` = 422, `resources_used.mem` = 1545812kb, `resources_used.vmem` = 4859968kb, `resources_used.ncpus` = 16, and `Exit_status` = 0. R3D2 ran on `mnode101/0*0`, with `ctime` = Mon Jun 8 12:35:11 2026, `stime` = Mon Jun 8 12:35:12 2026, `mtime` = Mon Jun 8 12:36:45 2026, `resources_used.walltime` = 00:01:26, `resources_used.cput` = 00:06:41, `resources_used.cputpercent` = 461, `resources_used.mem` = 2125400kb, `resources_used.vmem` = 8032600kb, `resources_used.ncpus` = 16, and `Exit_status` = 0.

The restart debug traces show that the first safe overwrite hook is the restart continuation step with `KINC` = 0, `TIME(1)` = 0, and `TIME(2)` equal to the checkpoint cycle within floating-point tolerance. For R3D1, the first restart call had `JSTEP(1)` = 251, `KINC` = 0, and `TIME(2)` = 250.000000000019. For R3D2, the first restart call had `JSTEP(1)` = 501, `KINC` = 0, and `TIME(2)` = 499.999999999974. This confirms that native restart exposes the restarted material state to UMAT before the first continuation increment.

The next thesis-safe implementation step is Stage 16N-R3E exact no-op overwrite. The overwrite should target only independent material memory variables, namely `STATEV(1)`, `STATEV(2:19)`, and `STATEV(20:25)`. `STATEV(26)` and `STATEV(27)` should not be independently overwritten because they are derived or diagnostic state.

## 18 Stage 16N-R3E Exact Restart-Preserved Overwrite

Stage 16N-R3E is the first active implementation of the restart-preserved route. It is not yet a cycle-jump test. The objective is to prove that a UMAT can overwrite exact material memory inside a native Abaqus restart run without destroying the preserved displacement, strain, equilibrium, and solver state.

The prepared controls are:

Table 31: Stage 16N-R3E exact overwrite controls submitted on 2026-06-09.

| Case | PBS job          | Restart | Target | Overwrite trigger    | Variables    |
|------|------------------|---------|--------|----------------------|--------------|
| R3E1 | 1342248.mmaste02 | 250     | 500    | JSTEP(1)=251, KINC=0 | STATEV(1:25) |
| R3E2 | 1342249.mmaste02 | 500     | 750    | JSTEP(1)=501, KINC=0 | STATEV(1:25) |

The UMAT hook reads exact per-element/per-integration-point state from the restart-source `.odb`, converted to a direct-access binary table. It overwrites only independent material-memory variables, `STATEV(1:25)`. It does not table-overwrite `STATEV(26)` or `STATEV(27)`; `STATEV(26)` remains derived by the constitutive update and `STATEV(27)` remains increment-local diagnostic state.

The first R3E submission attempt, 1342246.mmaste02 and 1342247.mmaste02, failed before the solve because Abaqus could not resolve `scratch=.` from the long case directory. This was an infrastructure issue, not a UMAT or restart-state result. The runner was corrected to use the short PBS scratch directory `$PBS_JOBDIR`. Corrected submissions 1342248.mmaste02 and 1342249.mmaste02 started at Tue Jun 9 06:09:58 2026. Both request `select=1:ncpus=16:mpiprocs=1:ompth` `walltime=24:00:00`, and both datachecks compiled the overwrite UMAT successfully before entering the production solve.

Both corrected jobs completed Abaqus successfully. PBS history reports `Exit_status=1` and `Stageout_status=1` for both jobs, but the solver files show `THE ANALYSIS HAS COMPLETED SUCCESSFULLY` in the `.sta` files and `THE ANALYSIS HAS BEEN COMPLETED` in the `.msg` files. The nonzero PBS status is therefore a stage-out or wrapper artifact, not a solver failure. Final accounting was:

Table 32: Stage 16N-R3E final PBS accounting.

| Job     | Case | Walltime | CPU time | CPU % | Memory     | Host     |
|---------|------|----------|----------|-------|------------|----------|
| 1342248 | R3E1 | 04:06:17 | 22:36:56 | 639   | 94375880kb | mnode101 |
| 1342249 | R3E2 | 04:10:00 | 22:43:25 | 643   | 94375816kb | mnode102 |

The comparison against the reference was exact at the target cycles:

Table 33: Stage 16N-R3E exact overwrite comparison results.

| Case | Target cycle | Status | Max global error | Max primary local error |
|------|--------------|--------|------------------|-------------------------|
| R3E1 | 500          | pass   | 0%               | 0%                      |
| R3E2 | 750          | pass   | 0%               | 0%                      |

R3E1 was compared against the default Stage 16N 1000-cycle pilot reference at cycle 500. R3E2 was compared against the parallel 1000-cycle reference because the default pilot comparison table did not contain cycle 750. The exact zero-error result confirms that modifying only independent material-memory variables inside a native restart does not destroy the preserved finite-element equilibrium state.

The current thesis-safe conclusion is therefore:

Native Abaqus restart reproduced the reference exactly, proving that the inhomogeneous FE state is restartable when Abaqus preserves the displacement, strain, and equilibrium state. The next step is therefore to apply state changes inside the restarted analysis, rather than attempting scratch initialization through SDVINI/SIGINI.

## 19 Stage 16N-R3J Restart-Preserved Jump Tests

Stage 16N-R3J is the first nonzero repaired cycle-jump workflow after the R3E exact-overwrite pass. The finite-element displacement, strain, equilibrium, and solver state are still preserved by native Abaqus restart. The UMAT modifies only independent material memory, `STATEV(1:25)`, at the restart continuation call with `KINC=0`. The state modification is a cycle-space extrapolation,

$$\text{STATEV\_jump} = \text{STATEV\_base} + \Delta N \frac{d\text{STATEV}}{dN}.$$

The active production submissions are:

Table 34: Stage 16N-R3J active restart-preserved jump jobs submitted on 2026-06-10.

| Case | PBS job          | Restart | Slope pair | Material jump | Target |
|------|------------------|---------|------------|---------------|--------|
| R3J1 | 1342923.mmaste02 | 250     | 100 → 250  | 250 → 255     | 500    |
| R3J2 | 1342924.mmaste02 | 500     | 250 → 500  | 500 → 505     | 750    |

The originally desired one-cycle slope pairs,  $249 \rightarrow 250$  and  $499 \rightarrow 500$ , were not available in the R1A restart-source `.odb` as stress/SDV field-output frames. The active corrected jobs therefore use the nearest available endpoint field-output pairs ending at the restart checkpoints:  $100 \rightarrow 250$  for R3J1 and  $250 \rightarrow 500$  for R3J2. This slope choice is less local than the initial ideal one-cycle slope, so it must be reported with the R3J results.

Several setup-only attempts were needed before the active production jobs. Jobs 1342915 and 1342916 failed because an upload quoting issue populated incorrect remote directories. Jobs 1342917 and 1342918 failed because cycles 249 and 499 had no stress/SDV field-output frames. Jobs 1342919 and 1342920 failed because the cluster Python rejected `from __future__ import annotations`. Jobs 1342921 and 1342922 failed because the older `pathlib.write_text` implementation rejected the `newline` keyword. These were setup and compatibility failures before the production solve, not scientific R3J failures.

The active corrected submissions, 1342923.mmaste02 and 1342924.mmaste02, passed state extraction, extrapolated-state creation, UMAT compile/link, and Abaqus datacheck. At the first live resource check both were running under the standard production setup: `select=1:ncpus=16:mpiprocs=16:walltime=24:00:00`, and Abaqus `cpus=16 mp_mode=threads`. 1342923 ran on `mnode101/0*0`; 1342924 ran on `mnode102/0*0`.

The R3J comparison classifies results using global RF/U/loop metrics, primary local metrics `HOLE_RING_MISES_MAX`, `HOLE_RING_S11_MAX`, `HOLE_RING_S11_ABS`, and `HOLE_RING_S11_MAX_ABS`. The pass threshold is `max.primary.local.error.pct <= 5`; 5–10% is review; larger than 10% or solver instability is fail.

## 19.1 R3J Final Check on 2026-06-11

On 2026-06-11, PBS history showed that both active R3J jobs had finished. PBS reported `Exit_status=1` and `Stageout_status=1` for both jobs, but the Abaqus solver runs completed successfully. In both cases, the `.sta` file ends with `THE ANALYSIS HAS COMPLETED SUCCESSFULLY`. The nonzero PBS status came from the wrapper comparison step using Windows-style reference paths during the original job, not from solver failure.

Table 35: Stage 16N-R3J final PBS accounting.

| Job     | Case | Walltime | CPU time | CPU % | Memory     | Host     |
|---------|------|----------|----------|-------|------------|----------|
| 1342923 | R3J1 | 04:07:53 | 22:42:03 | 637   | 94375924kb | mnode101 |
| 1342924 | R3J2 | 04:10:06 | 22:44:30 | 646   | 94377920kb | mnode102 |

Both jobs requested `select=1:ncpus=16:mpiprocs=1:ompthreads=16:mem=90gb` with `walltime=24:00:00`. R3J1 started at Wed Jun 10 16:58:01 2026 and finished at Wed Jun 10 21:05:59 2026. R3J2 started at Wed Jun 10 16:58:00 2026 and finished at Wed Jun 10 21:08:11 2026.

The comparison was rerun manually on HPC with Linux reference paths. R3J1 was compared against the pilot 1000-cycle reference at cycle 500, and R3J2 was compared against the parallel 1000-cycle reference at cycle 750. Both restart-preserved jump tests passed exactly:

Table 36: Stage 16N-R3J restart-preserved jump comparison results.

| Case | Target cycle | Status | Max global error | Max primary local error | Diagnostic S11 error |
|------|--------------|--------|------------------|-------------------------|----------------------|
| R3J1 | 500          | pass   | 0%               | 0%                      | 0%                   |
| R3J2 | 750          | pass   | 0%               | 0%                      | 0%                   |

This is the first successful nonzero repaired cycle-jump gate for the inhomogeneous plate-with-hole benchmark. Within the checked metrics, native restart plus independent material-memory extrapolation preserved the FE state and reproduced the reference exactly after the +5 material-state jump.

## 19.2 R3J Zero-Error Audit

Because the R3J result is exactly zero for a nonzero material-state extrapolation, a targeted audit was performed on 2026-06-11 before moving to larger jumps. The audit confirms that the comparison did not accidentally compare a reference file against itself. The R3J1 jump metrics CSV and pilot reference metrics CSV had different inode numbers, sizes, and SHA-256 hashes. The R3J2 jump metrics CSV and parallel reference metrics CSV were likewise distinct.

The extrapolated state files also differ from the base restart states. For R3J1, all 25,184 integration-point records changed between cycle 250 and the extrapolated cycle-255 state; 478,496 state values changed, with maximum absolute delta 0.527609507243. For R3J2, all 25,184 records changed between cycle 500 and the extrapolated cycle-505 state; 478,496 state values changed, with maximum absolute delta 0.294372863770.

The UMAT overwrite trace was present in the Abaqus `.dat` files, not the `.msg` files. R3J1 printed `STAGE16N_R3J_OVERWRITE` at `KSTEP=251`, `KINC=0`, and `TIME(2)=250.000000000019`. R3J2 printed the same marker at `KSTEP=501`, `KINC=0`, and `TIME(2)=499.999999999974`. This confirms that the jump was applied once at the intended native-restart continuation hook. The generator was corrected so future wrapper logs grep the `.dat` file for this marker.

The endpoint cycle accounting was also correct. R3J1 produced 250 continuation rows, cycles 251–500, and compared against reference cycle 500. R3J2 produced 250 continuation



rows, cycles 501–750, and compared against reference cycle 750. The comparison details for both cases report zero error in U1, RF1, loop area, HOLE\_RING\_MISES\_MAX, HOLE\_RING\_SDV1\_MAX, HOLE\_RING\_SDV8\_MAX, HOLE\_RING\_SDV11\_MAX, and diagnostic HOLE\_RING\_S11\_MAX\_ABS.

The thesis-safe interpretation is therefore:

The restart-preserved cycle-jump strategy was successfully demonstrated for nonzero +5 cycle jumps. Both jumps, from cycle 250 to 255 and from cycle 500 to 505, completed successfully in Abaqus and reproduced the corresponding full reference endpoints with zero global and primary local error. This confirms that the previous reinjection problem was not a limitation of the material model or the inhomogeneous plate-with-hole geometry, but of the scratch SDVINI/SIGINI initialization strategy.

### 19.3 R3J +10 Cases Completed

The next conservative fixed-jump cases, R3J3 and R3J4, were submitted on 2026-06-11 and completed successfully. These jobs test whether the restart-preserved material-memory jump remains exact when the extrapolated material-state offset is doubled from +5 cycles to +10 cycles.

Table 37: Stage 16N-R3J +10 restart-preserved jump cases.

| Case | PBS job            | Restart | Slope pair | Material jump | Target |
|------|--------------------|---------|------------|---------------|--------|
| R3J3 | 1344231.mmmaster02 | 250     | 100 → 250  | 250 → 260     | 500    |
| R3J4 | 1344232.mmmaster02 | 500     | 250 → 500  | 500 → 510     | 750    |

PBS history reported `Exit_status=0` for both jobs, while `Stageout_status=1` remained present. The Abaqus solver status is therefore successful, and the stage-out warning is treated as a file-transfer/accounting issue rather than a solver failure. The `.sta` files for both jobs end with `THE ANALYSIS HAS COMPLETED SUCCESSFULLY`.

Table 38: Stage 16N-R3J +10 final PBS accounting.

| Job     | Case | Walltime | CPU time | CPU % | Memory     | Host     |
|---------|------|----------|----------|-------|------------|----------|
| 1344231 | R3J3 | 04:08:42 | 22:51:08 | 646   | 94375928kb | mnode101 |
| 1344232 | R3J4 | 04:07:59 | 22:41:15 | 656   | 94377792kb | mnode102 |

Both jobs requested `select=1:ncpus=16:mpiprocs=1:ompthreads=16:mem=90gb` with `walltime=24:00:00`. R3J3 started at Thu Jun 11 09:55:29 2026 and finished at Thu Jun 11 14:04:16 2026. R3J4 started at Thu Jun 11 09:55:29 2026 and finished at Thu Jun 11 14:03:34 2026.

Table 39: Stage 16N-R3J +10 comparison results.

| Case | Target cycle | Status | Max global error | Max primary local error | Diagnostic S11 error |
|------|--------------|--------|------------------|-------------------------|----------------------|
| R3J3 | 500          | pass   | 0%               | 0%                      | 0%                   |
| R3J4 | 750          | pass   | 0%               | 0%                      | 0%                   |

The +10 results preserve the same zero-error endpoint behavior observed in the +5 cases. Within the current comparison metrics, the restart-preserved method has now passed nonzero fixed jumps of +5 and +10 cycles at both restart checkpoints. This strengthens the Stage 16N-R conclusion: native Abaqus restart plus UMAT material-state overwrite solves the fragile scratch reinjection problem seen with SDVINI/SIGINI.

A targeted +10 audit was performed because the error remains exactly zero. The audit checks passed:

- The R3J3/R3J4 jump metrics are distinct from their reference metrics by inode, file size, and SHA-256 hash, so the jobs were not self-compared.
- The extrapolated state differs from the checkpoint base state for all 25,184 integration-point records in both jobs. R3J3 changed 528,728 of 831,072 numeric state/stress values, with maximum absolute delta 1.0552190144856723. R3J4 changed 521,304 of 831,072 numeric values, with maximum absolute delta 0.5887457275390595.
- The UMAT overwrite trace appears in the production `.dat` files at KSTEP=251 for R3J3 and KSTEP=501 for R3J4.
- Continuation cycle accounting is correct: R3J3 contains cycles 251–500 and R3J4 contains cycles 501–750.
- Endpoint comparisons target the intended reference cycles, 500 and 750.

The exact zero-error +10 result is therefore credible under the current audit. The scientific caution is that broad predictive acceleration should not be claimed until larger jumps reveal the accuracy boundary or continue to pass under increasingly aggressive skips. The recommended progression is +20 next, specifically R3J5: 250 → 270 → 500 and R3J6: 500 → 520 → 750. These jobs should not be submitted until the `/home` heavy-file cleanup has completed, R3J3/R3J4 heavy outputs have been moved to `/scratch`, and the next PBS scripts run Abaqus directly in `/scratch`.

## 19.4 R3J +20 Preparation and Cleanup-Gated Submission

On 2026-06-11, the R3J generator was extended with the next controlled escalation pair, R3J5 and R3J6. The new cases use the same restart-preserved UMAT overwrite workflow and the same endpoint comparison targets as the +5 and +10 studies:

Table 40: Stage 16N-R3J +20 cleanup-gated jump cases.

| Case | Restart checkpoint | Slope pair | Material jump | Target cycle | Status                        |
|------|--------------------|------------|---------------|--------------|-------------------------------|
| R3J5 | 250                | 100 → 250  | 250 → 270     | 500          | prepared, waiting for cleanup |
| R3J6 | 500                | 250 → 500  | 500 → 520     | 750          | prepared, waiting for cleanup |

The case folders and PBS scripts were uploaded to the HPC repository, but the jobs were not submitted immediately. Instead, the cleanup-gated watchdog `~/submit_r3j_plus20_after_cleanup.sh` was installed and started as PID 653015. The watchdog checks that offload processes have finished, no PBS jobs are active, `/home` usage is at most 75%, `/scratch` usage is at most 90%, and no Abaqus heavy files larger than 10 GB remain in the `/home` project tree. Only then will it submit R3J5 and R3J6 and write the marker `.r3j_plus20_auto_submitted`. At installation time the observed storage gate was still active: `/home` was 76%, `/scratch` was 74%, and the offload processes were still running.

On 2026-06-12, the general storage gate had improved to `/home`=71% and `/scratch`=74%, but the watchdog still correctly blocked submission because three heavy `.stt` files larger than 10 GB remained in the `/home` project tree: the R2C1 native restart `.stt`, the R3J3 +10 `.stt`, and the R3J4 +10 `.stt`. A focused offload process, `/tmp/offload_remaining_heavy_for_r3j_plus20.py`, was started as PID 1878791 to copy those blockers to `/scratch/pr21vyci/home_offload/...`, verify file sizes, delete the `/home` originals, and replace them with symlinks. The cleanup-gated

watchdog was restarted as PID 1877723 and remains responsible for submitting R3J5/R3J6 once this final blocker list is cleared.

The focused offload completed successfully, reducing `/home` to 64% at watchdog submission time. The watchdog then submitted R3J5 and R3J6 automatically at approximately Fri Jun 12 06:52 CEST 2026:

Table 41: Stage 16N-R3J +20 final PBS accounting.

| Job ID  | Case | Walltime | CPU time | CPU percent | Memory     | Host     |
|---------|------|----------|----------|-------------|------------|----------|
| 1344614 | R3J5 | 04:13:13 | 22:48:35 | 621         | 94375888kb | mnode100 |
| 1344615 | R3J6 | 04:07:32 | 22:32:31 | 641         | 94375872kb | mnode101 |

Both jobs completed with PBS `Exit_status=0` and `Stageout_status=1`. R3J5 started at Fri Jun 12 06:52:29 2026 and finished at 11:05:48. R3J6 started at Fri Jun 12 06:52:31 2026 and finished at 11:00:09. The `.sta` files for both jobs end with `THE ANALYSIS HAS COMPLETED SUCCESSFULLY`.

Table 42: Stage 16N-R3J +20 comparison results.

| Case | Target cycle | Status | Max global error | Max primary local error | Diagnostic S11 error |
|------|--------------|--------|------------------|-------------------------|----------------------|
| R3J5 | 500          | pass   | 0%               | 0%                      | 0%                   |
| R3J6 | 750          | pass   | 0%               | 0%                      | 0%                   |

The UMAT overwrite trace confirms that the state overwrite fired at the intended restart continuation hook: `KSTEP=251` for R3J5 and `KSTEP=501` for R3J6, with 9 diagnostic trace lines in each case. The Stage 16N-R conclusion is therefore stronger again: the restart-preserved UMAT material-state overwrite workflow has now passed nonzero +5, +10, and +20 state jumps. This supports the main repair conclusion that native Abaqus restart removes the mechanical-state reinjection instability observed in the SDVINI/SIGINI scratch route.

## 19.5 R3J +20 Audit

The +20 audit found one important qualification. R3J5 and R3J6 were not self-compared: their cycle-metric files and reference metric files are separate files with different SHA-256 hashes. The generated extrapolated-state summaries report 25,184 element/integration-point records, material-state cycles 270 and 520, and the intended slope pairs 100–250 and 250–500. The overwrite traces confirm that the UMAT hook fired at the first continuation increment, and the comparison endpoints are the intended cycles 500 and 750.

However, the current continuation decks do not yet skip Abaqus load-cycle steps. R3J5 restarts from cycle 250 and begins the continuation deck at `CYCLE_0251`; its extracted metrics cover cycles 251–500. R3J6 restarts from cycle 500 and begins at `CYCLE_0501`; its extracted metrics cover cycles 501–750. Therefore the present evidence should be described as a stable restart-preserved material-state jump/overwrite validation, not yet as proof of computational acceleration by solving fewer load cycles. The next acceleration-safe generator should start the continuation after the jumped cycle label, or otherwise provide a separate accounting that proves fewer solved load cycles between checkpoint and endpoint.

The controlled +50 cases R3J7 and R3J8 were prepared locally for later use, but they inherit the same continuation-step pattern. They should not be submitted as acceleration evidence until this deck-generation issue is fixed. They may still be useful as larger material-state perturbation tests if that is the explicit goal.

## 19.6 R4J Scratch-Based +50 Cycle-Skip Setup

The next acceleration-safe test pair was therefore generated under new case names, R4J1 and R4J2. These cases preserve the same native restart and UMAT material-state overwrite strategy, but their continuation step labels begin after the jumped material-state cycle:

Table 43: Stage 16N-R4J scratch-based +50 cycle-skip cases.

| Case | Restart checkpoint | Material-state jump   | Solved continuation cycles | Endpoint |
|------|--------------------|-----------------------|----------------------------|----------|
| R4J1 | 250                | 250 $\rightarrow$ 300 | 301–500                    | 500      |
| R4J2 | 500                | 500 $\rightarrow$ 550 | 551–750                    | 750      |

The generated R4J1 deck starts with `*STEP, NAME=CYCLE_0301`; the generated R4J2 deck starts with `*STEP, NAME=CYCLE_0551`. The UMAT overwrite trigger remains the first restart-continuation step, `JSTEP(1)=251` for R4J1 and `JSTEP(1)=501` for R4J2, because that is where Abaqus enters the first new step after reading the native checkpoint.

To avoid repeating the HPC /home storage issue, the R4J pair was submitted through the scratch watchdog `watch_cleanup_and_submit_stage16n_scratch_jobs.sh`. This script waits for ongoing offload work to finish, verifies /home and /scratch usage, checks that no large Abaqus heavy files remain in the /home project tree, stages only the required case folders, helper scripts, reference CSV files, and restart-source symlinks to `/scratch/pr21vyci/stage16n_scratch_runs_r4j_v`, submits PBS wrappers from the /home case folders, runs Abaqus in the scratch case directories, and copies back only lightweight evidence. The final submission required the same queue directive used by accepted Stage 16N jobs, `#PBS -q entry_teachingq`. With that fix, R4J1 and R4J2 were submitted on Sat Jun 13 06:01 CEST 2026 as jobs `1344946.mmaste02` and `1344947.mmaste02`.

## 19.7 R4J +50 True Cycle-Skip Result

Both R4J jobs completed successfully as Abaqus analyses. PBS reported `Exit.status=0` for both jobs, and the `.sta` files end with `THE ANALYSIS HAS COMPLETED SUCCESSFULLY`. The R4J1 job ran on `mnode100` from Sat Jun 13 06:01:25 to 10:20:56 CEST 2026, using 04:19:28 walltime, 17:56:39 CPU time, 571 CPU percent, and 94377788kb memory. The R4J2 job ran on `mnode101` from Sat Jun 13 06:01:26 to 10:12:41 CEST 2026, using 04:11:10 walltime, 17:28:03 CPU time, 568 CPU percent, and 94372048kb memory.

Table 44: Stage 16N-R4J true +50 cycle-skip comparison results.

| Case | Endpoint | Status | Max global error | Max primary local error | Diagnostic S11 error |
|------|----------|--------|------------------|-------------------------|----------------------|
| R4J1 | 500      | fail   | 1.8127809%       | 14.384123%              | 9.4269674%           |
| R4J2 | 750      | fail   | 1.7938482%       | 14.426805%              | 11.71291%            |

The failed comparison status is an accuracy result, not a solver-stability result. In R4J1, the largest primary local error is `HOLE_RING_SDV8_MAX` at 14.384123%; `HOLE_RING_MISES_MAX` and `HOLE_RING_SDV11_MAX` also exceed 10%. In R4J2, the largest primary local error is `HOLE_RING_MISES_MAX` at 14.426805%. The global force-displacement metrics remain below about 1.9% in both cases, showing again that the local hole-ring metrics control the safe jump size.

This result provides the first true cycle-skip accuracy boundary for the repaired restart route. R3J +5, +10, and +20 validated stable restart-preserved material-state overwrite, but R4J is the first deck family that also skips solved Abaqus load cycles after the material-state target.

Therefore the thesis-safe conclusion is that native Abaqus restart plus UMAT-side material-memory overwrite solves the mechanical reinjection instability of the SDVINI/SIGINI scratch route, while a true +50 skipped-cycle acceleration is outside the current safe range for this inhomogeneous benchmark and linear state extrapolation. The next useful study should bracket the boundary with smaller true skips, for example +30 or +40, using the R4J continuation-step pattern.

Lightweight R4J evidence was copied into the repository. Heavy Abaqus result and restart files, including `.stt`, `.odb`, `.res`, `.sim`, `.mdl`, `.prt`, large `.msg`, large `.dat`, `state.bin`, and large `state.csv` files, are intentionally excluded from GitHub and kept in scratch/offload storage.

## 19.8 R4J +20 True-Skip Refinement Prepared

After the +50 accuracy failure, the next refinement pair was prepared as true-skip +20 rather than a larger jump. R4J3 restarts from cycle 250, overwrites material memory to cycle 270, and starts the solved continuation at `CYCLE_0271`; R4J4 restarts from cycle 500, overwrites material memory to cycle 520, and starts the solved continuation at `CYCLE_0521`. Thus these cases skip cycles 251–270 and 501–520, respectively, unlike the R3J overwrite-validation cases that still solved the intermediate cycles.

Table 45: Stage 16N-R4J true-skip +20 refinement cases prepared on 2026-06-13.

| Case | Restart checkpoint | Material-state jump | Solved continuation cycles | Endpoint |
|------|--------------------|---------------------|----------------------------|----------|
| R4J3 | 250                | 250 → 270           | 271–500                    | 500      |
| R4J4 | 500                | 500 → 520           | 521–750                    | 750      |

The dedicated scratch watchdog `watch_cleanup_and_submit_stage16n_r4j_plus20_scratch_jobs.sh` was created to stage only the required files into `/scratch/pr21vyci/stage16n_scratch_runs_r4j_plus20/Abaqus`, submit PBS wrappers from `/home`, run Abaqus in `/scratch`, and copy back only lightweight evidence. The jobs were not submitted at preparation time because the local workstation could not resolve the HPC login hostname `mlogin01.hrz.tu-freiberg.de`. Before submission, the storage gate and heavy-file check should be rerun.

## A Key Repository Evidence Files

- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_parallel_ma`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_adaptive_de`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_adaptive_de`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/STAGE16N_REINJECTION`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/STAGE16N_FIXED_JUMP`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_fixed_jump`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_fixed_jump`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_fixed_jump`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_fixed_jump`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/stage16n_make_b1_rob`
- `runs/chaboche_umat/stage16_abaqus_inhomogeneous_cycle_jump_benchmark/STAGE16N_STATEV_INDE`

- [illegible]

- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_fixed\_jump\_
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/stage16n\_exact\_reinj
- runs/chaboche\_umat/stage16\_abaqus\_inhomogeneous\_cycle\_jump\_benchmark/STAGE16N\_HPC\_MAIL\_PO