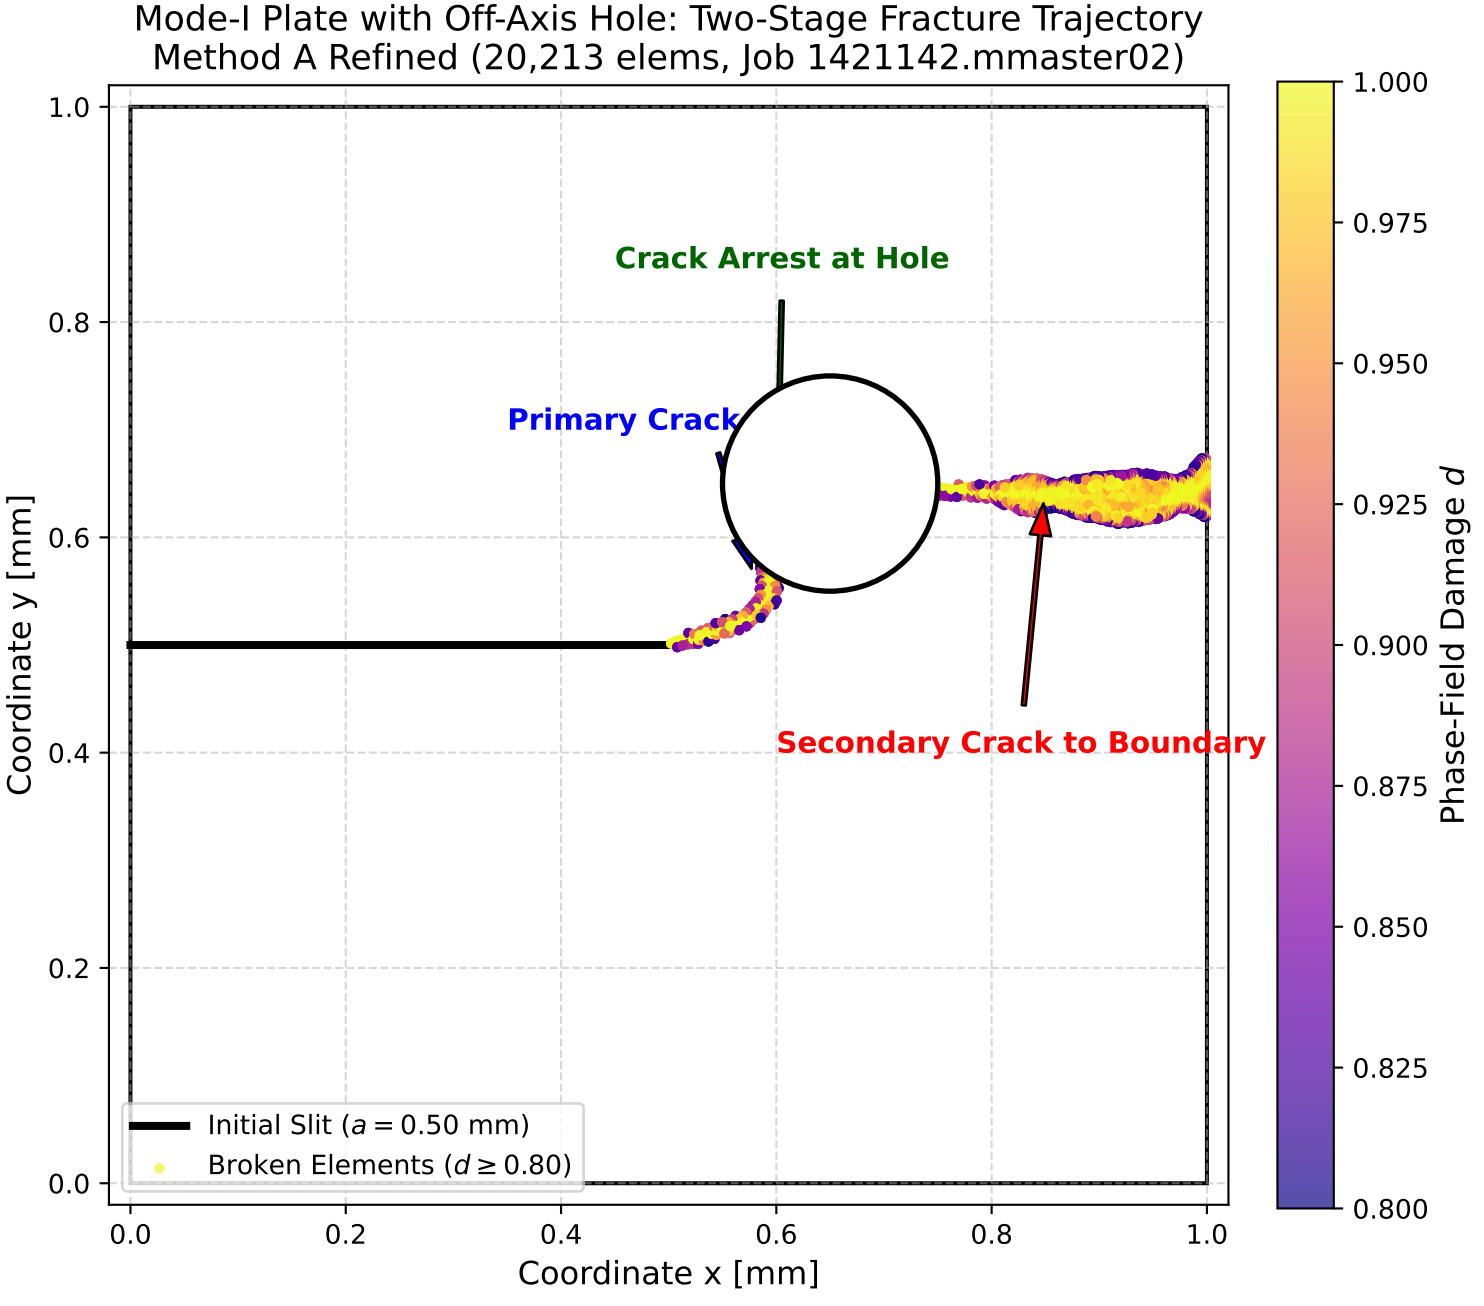

Mode-I Plate with Off-Axis Hole: Two-Stage Fracture Trajectory
Method A Refined (20,213 elems, Job 1421142.mmaster02)
Crack Arrest at Hole
Primary Crack
Secondary Crack to Boundary
Initial Slit (a = 0.50 mm)
Broken Elements (d ≥ 0.80)
Coordinate x [mm]
Coordinate y [mm]
Phase-Field Damage d
0.0
0.2
0.4
0.6
0.8
1.0
0.800
0.825
0.850
0.875
0.900
0.925
0.950
0.975
1.000