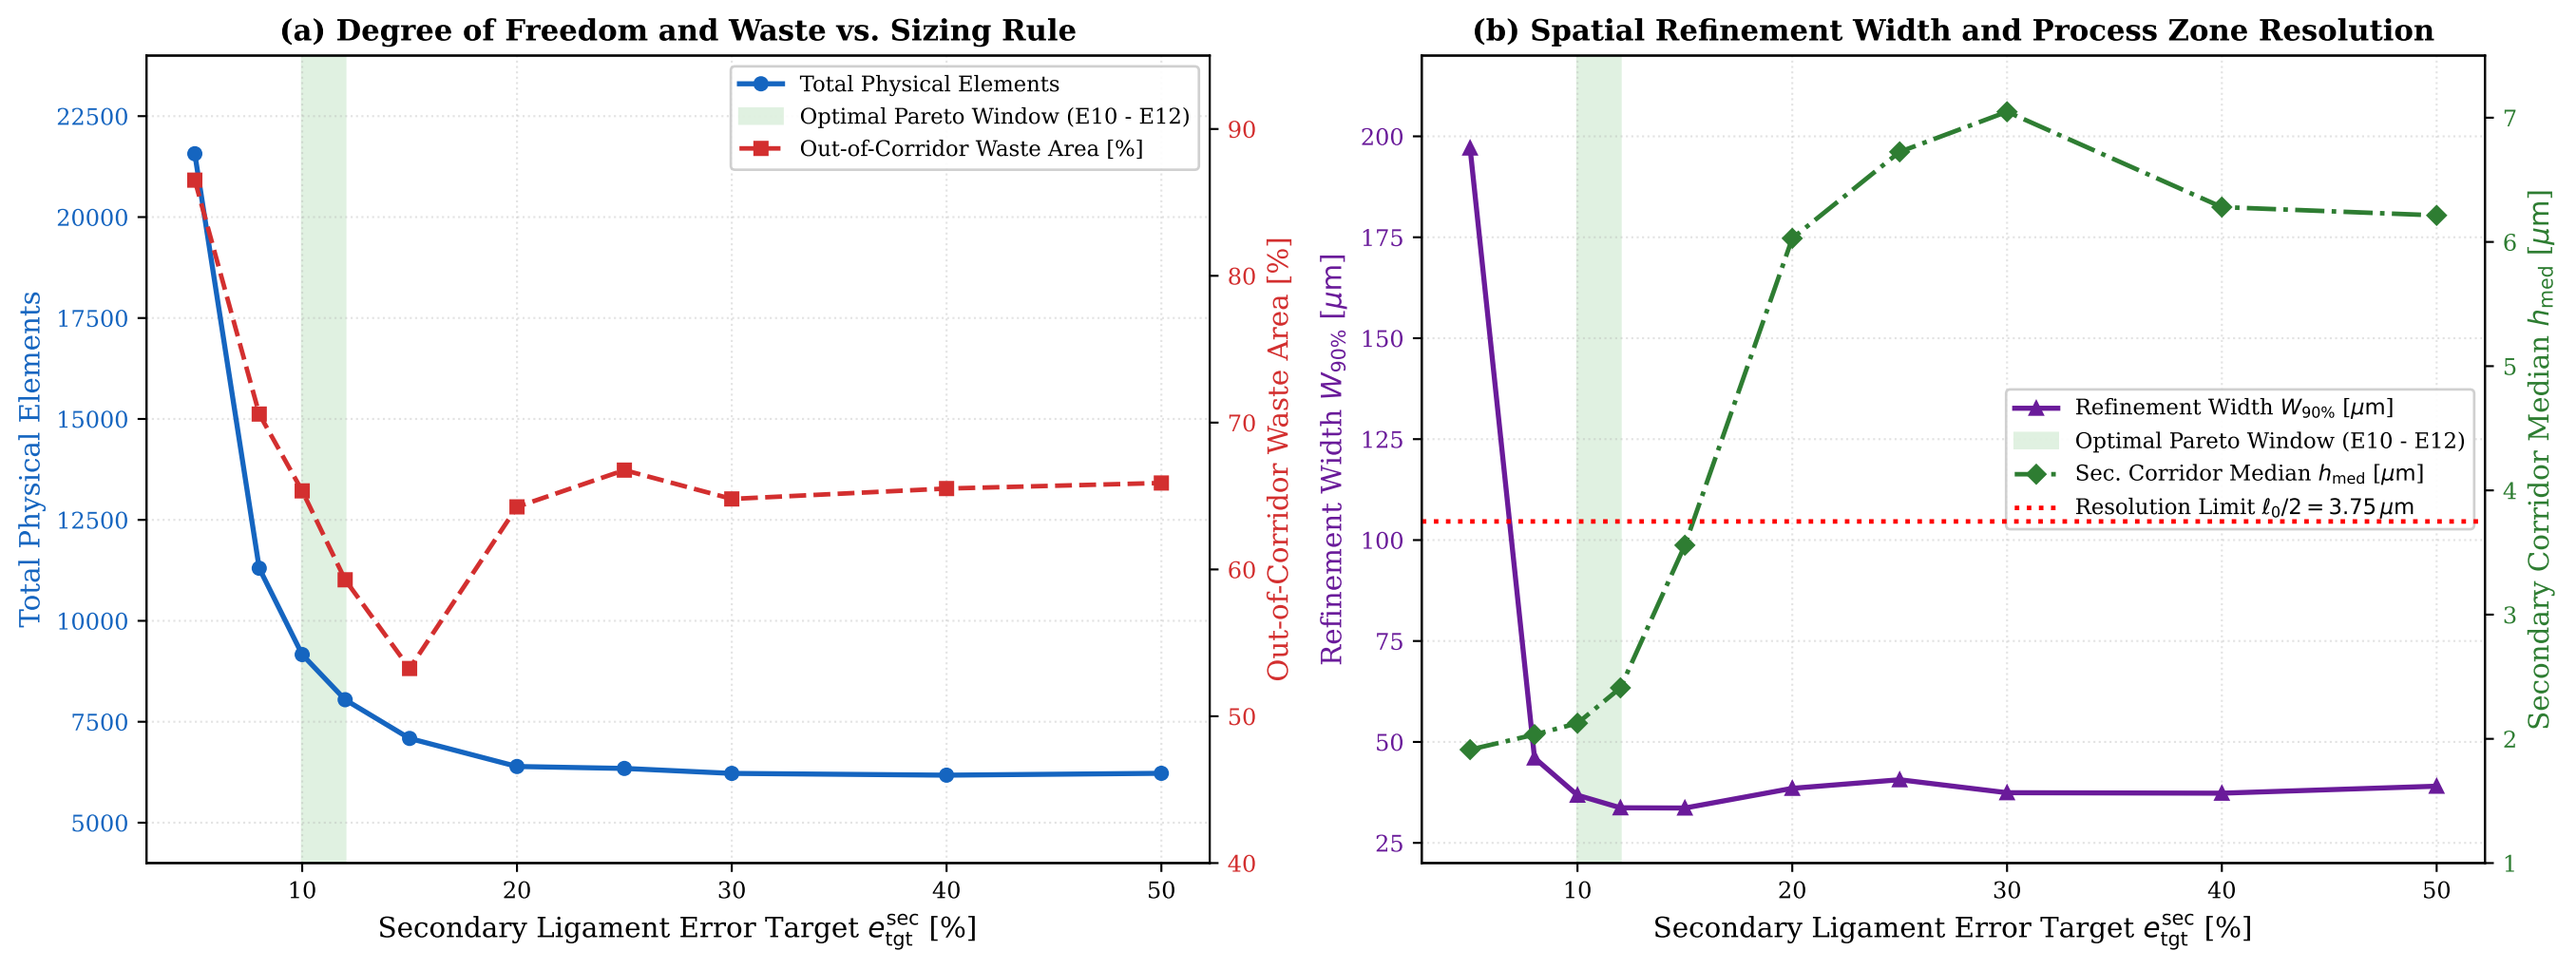
(a) Degree of Freedom and Waste vs. Sizing Rule
Total Physical Elements
Optimal Pareto Window (E10 - E12)
Out-of-Corridor Waste Area [%]
Total Physical Elements
Out-of-Corridor Waste Area [%]
Secondary Ligament Error Target e_{tgt}^{sec} [%]
(b) Spatial Refinement Width and Process Zone Resolution
Refinement Width $W_{90\%}$ [μm]
Optimal Pareto Window (E10 - E12)
Sec. Corridor Median h_{med} [μm]
Resolution Limit $\ell_0/2 = 3.75\,\mu$m
Refinement Width $W_{90\%}$ [μm]
Secondary Corridor Median h_{med} [μm]
Secondary Ligament Error Target e_{tgt}^{sec} [%]