(a) Published Figure 14: Geometry and Boundary Conditions (Pandey & Kumar 2025, CMES, Vol. 144, No. 3, p. 3272)

0.000 0.004 0.008 0.012 0.016 Elements Time (min)

Displacement [mm]

(a) (b)

: (**a**) Load-displacement response for single edge crack specimen under Mode-II loading, (**b**) Comp
of elements and computational time between standard PFM & proposed PFM


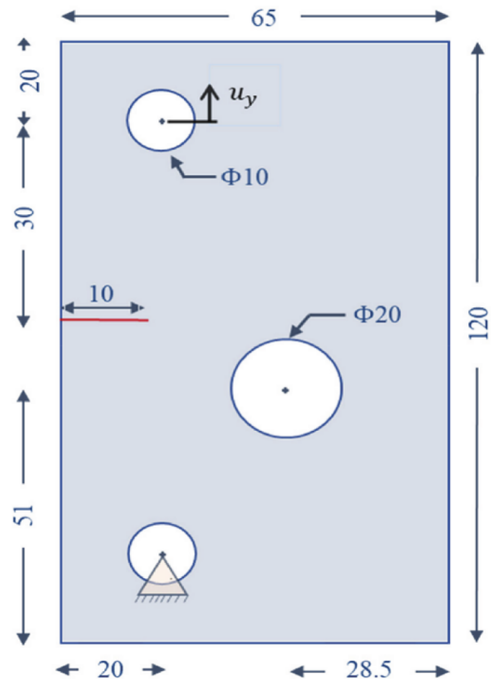


Figure 14: Geometry and boundary conditions of rectangular notched plate with hole

(b) Authenticated Numerical Reproduction & Datum Alignment (65.0 × 120.0 mm Plate with Exact Boundary Sets and Dimensions)

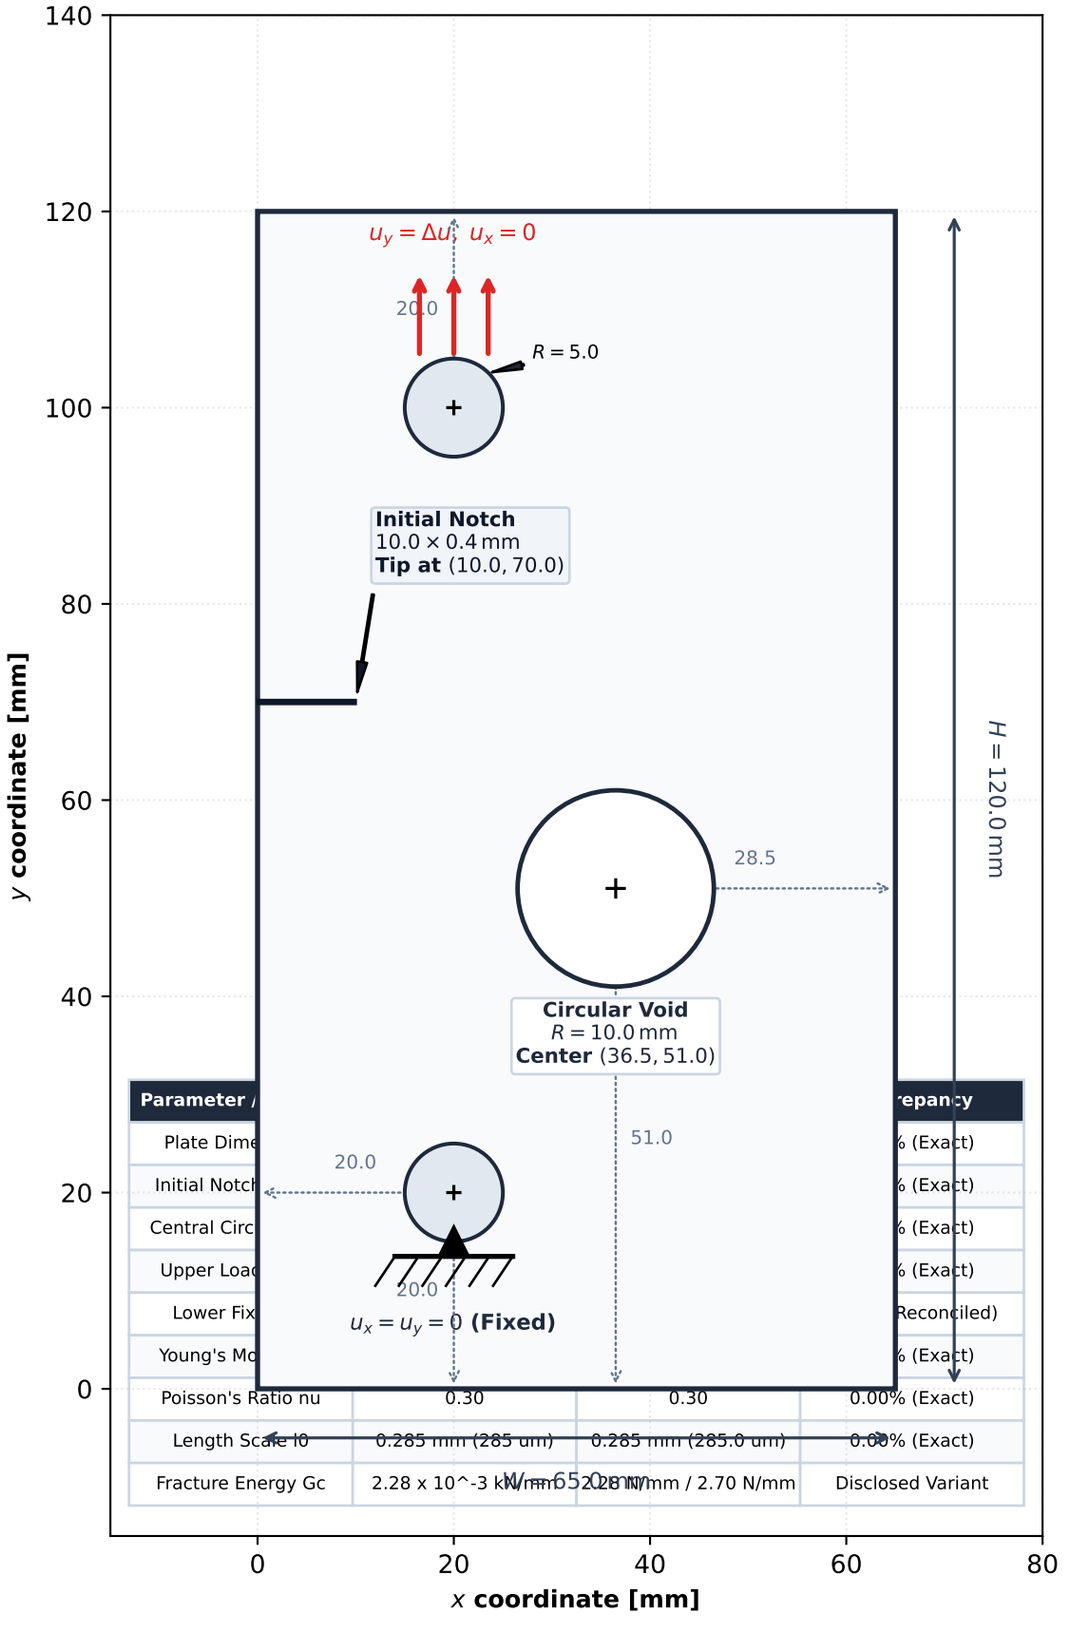

Parameter /			repancy
Plate Dime			% (Exact)
Initial Notch			% (Exact)
Central Circ			% (Exact)
Upper Load			% (Exact)
Lower Fix			Reconciled)
Young's Mo			% (Exact)
Poisson's Ratio nu	0.30	0.30	0.00% (Exact)
Length Scale l0	0.285 mm (285 um)	0.285 mm (285.0 um)	0.00% (Exact)
Fracture Energy Gc	2.28 x 10^-3 kN/mm	2.28 N/mm / 2.70 N/mm	Disclosed Variant