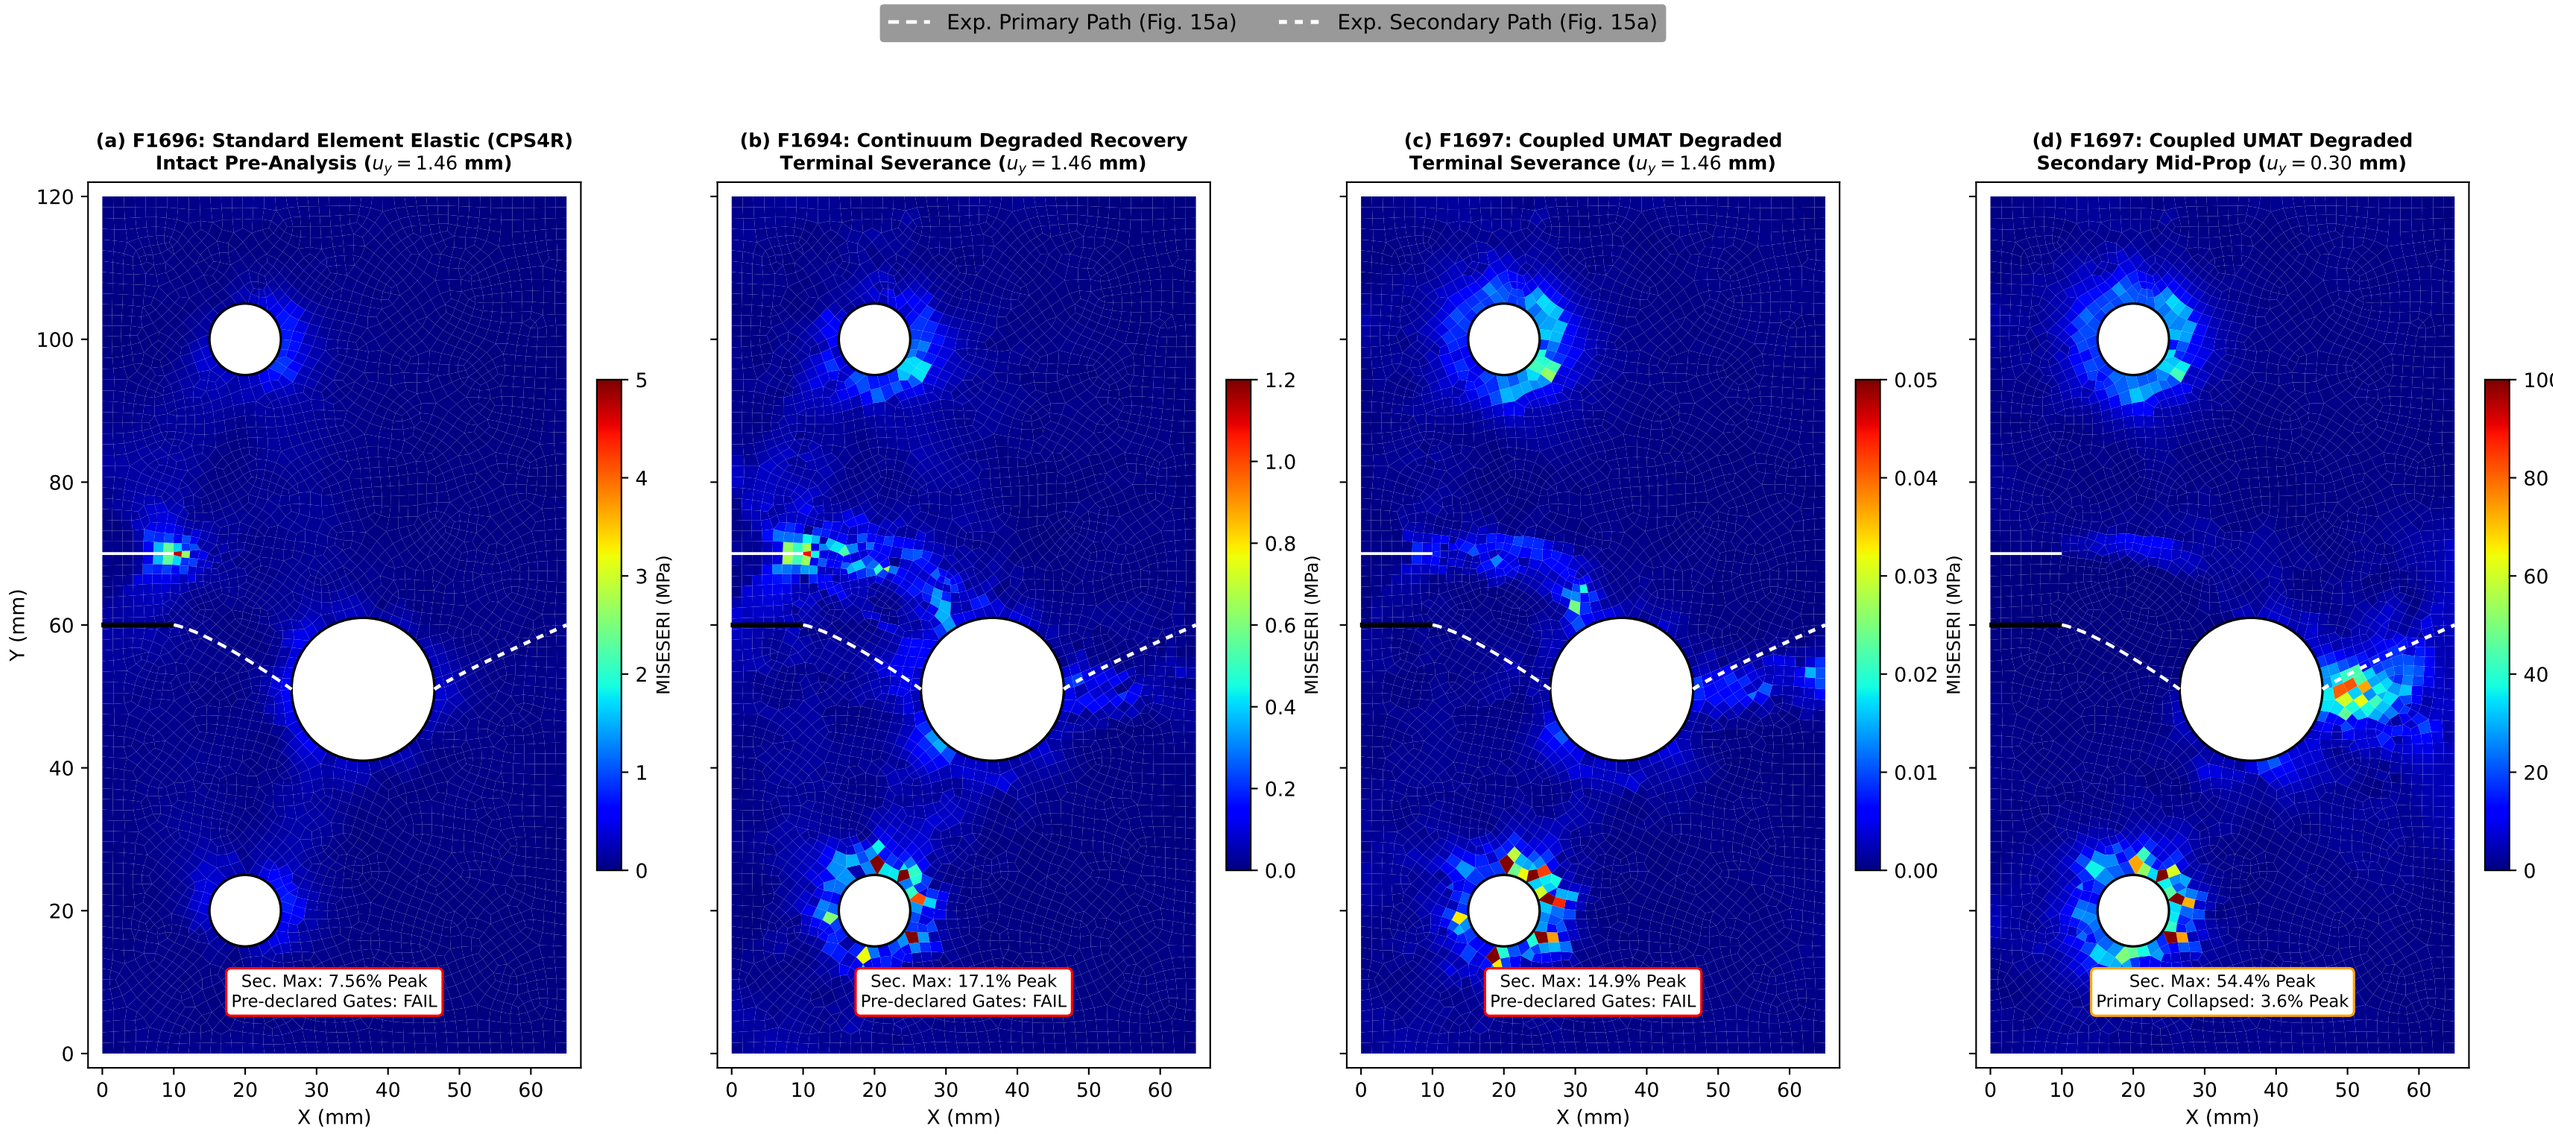

Exp. Primary Path (Fig. 15a)
Exp. Secondary Path (Fig. 15a)
(a) F1696: Standard Element Elastic (CPS4R)
Intact Pre-Analysis ($u_y = 1.46$ mm)
(b) F1694: Continuum Degraded Recovery
Terminal Severance ($u_y = 1.46$ mm)
(c) F1697: Coupled UMAT Degraded
Terminal Severance ($u_y = 1.46$ mm)
(d) F1697: Coupled UMAT Degraded
Secondary Mid-Prop ($u_y = 0.30$ mm)
Y (mm)
X (mm)
MISESERI (MPa)
Sec. Max: 7.56% Peak
Pre-declared Gates: FAIL
Sec. Max: 17.1% Peak
Pre-declared Gates: FAIL
Sec. Max: 14.9% Peak
Pre-declared Gates: FAIL
Sec. Max: 54.4% Peak
Primary Collapsed: 3.6% Peak