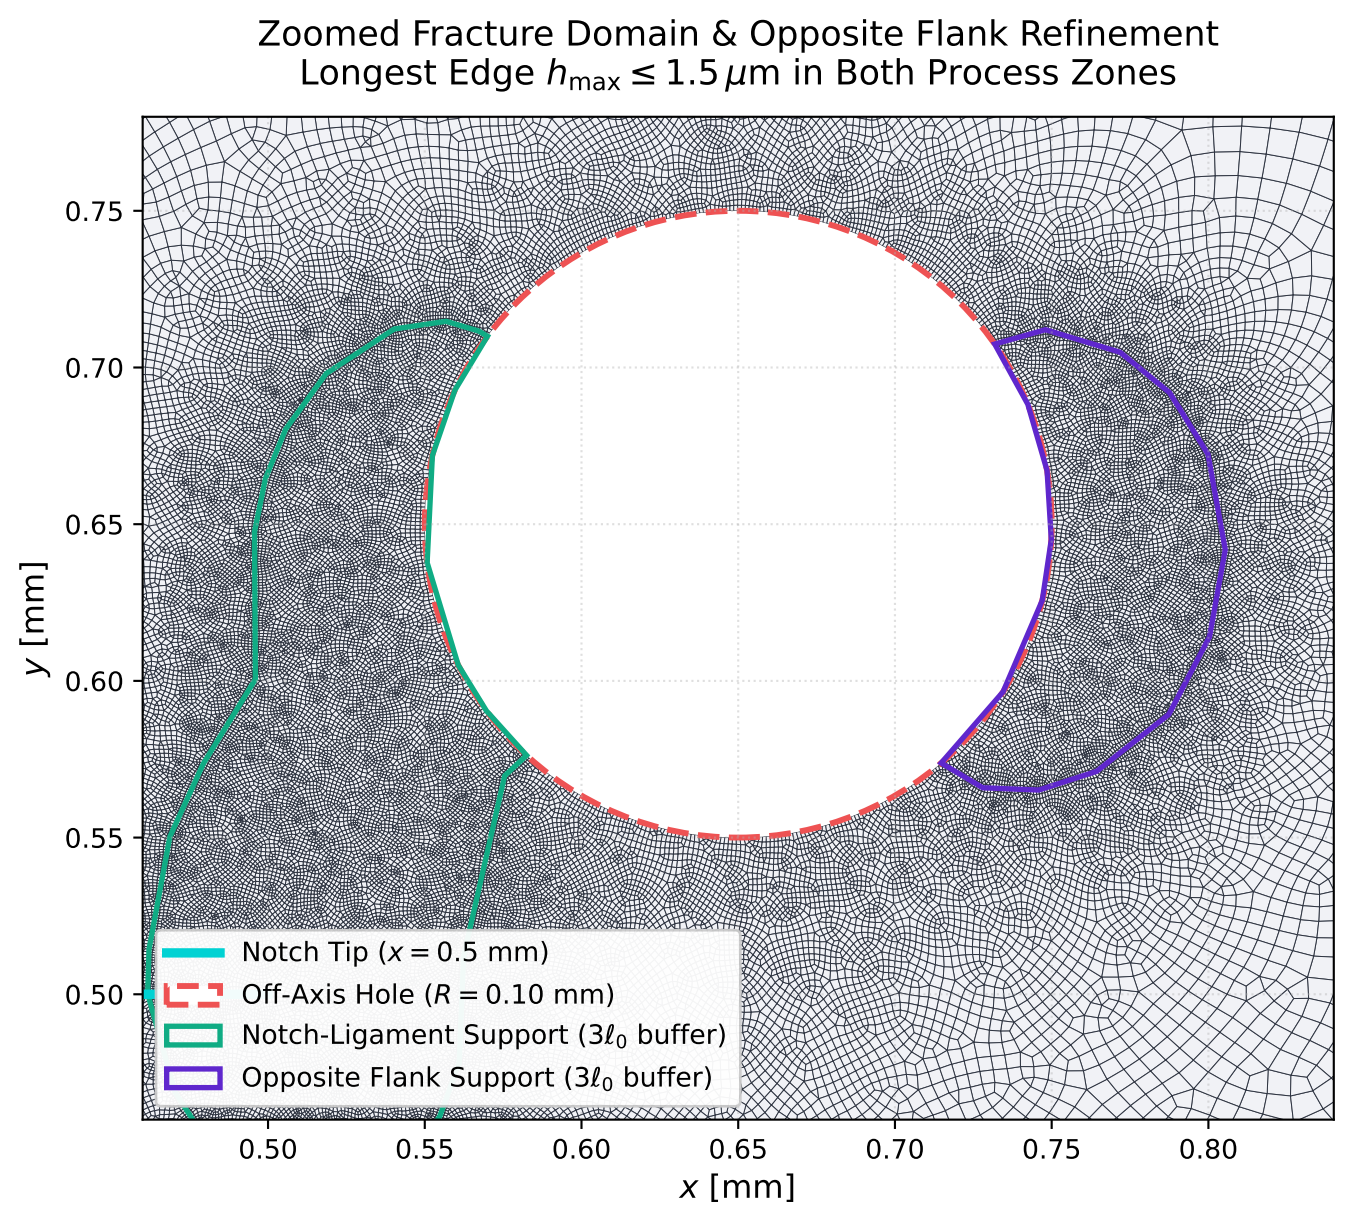

Zoomed Fracture Domain & Opposite Flank Refinement
Longest Edge $h_{\max} \leq 1.5\,\mu$m in Both Process Zones
Notch Tip ($x = 0.5$ mm)
Off-Axis Hole ($R = 0.10$ mm)
Notch-Ligament Support ($3\ell_0$ buffer)
Opposite Flank Support ($3\ell_0$ buffer)
0.75
0.70
0.65
0.60
0.55
0.50
y [mm]
0.50
0.55
0.60
0.65
0.70
0.75
0.80
x [mm]