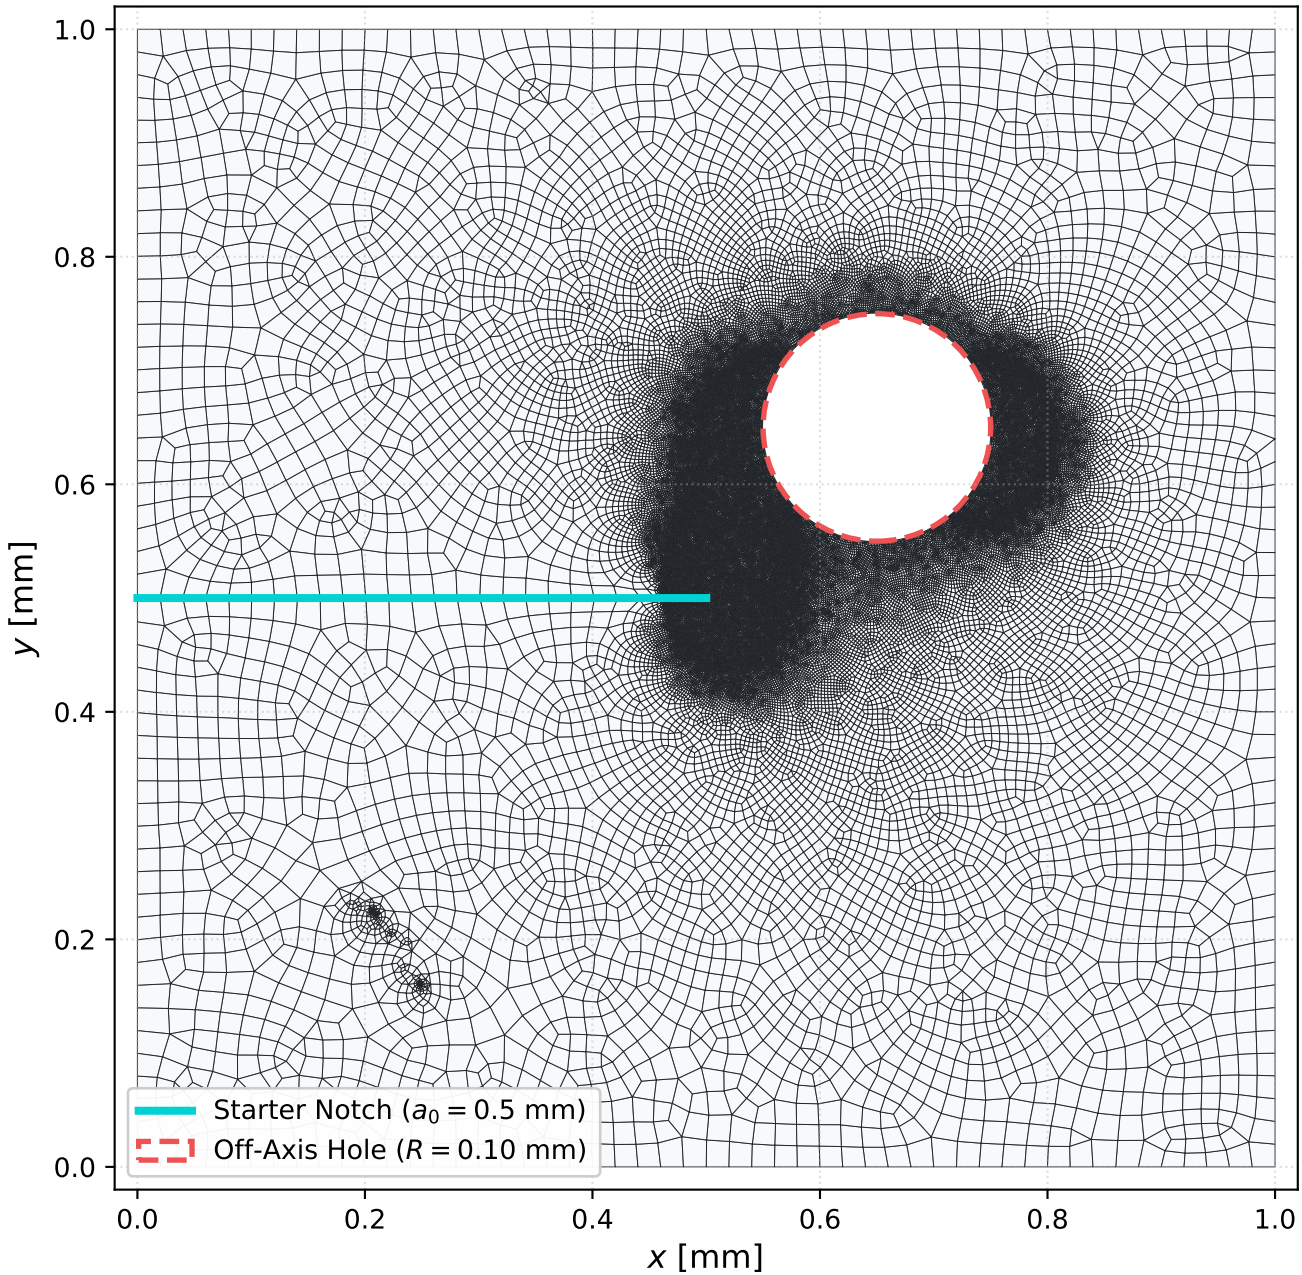

Corrected Damage-Informed Method A Adapted Mesh ($N = 54,563$)
Full Domain Support: Notch-Ligament & Opposite Hole Flank
1.0
0.8
0.6
0.4
0.2
0.0
y [mm]
0.0
0.2
0.4
0.6
0.8
1.0
x [mm]
Starter Notch ($a_0 = 0.5$ mm)
Off-Axis Hole ($R = 0.10$ mm)