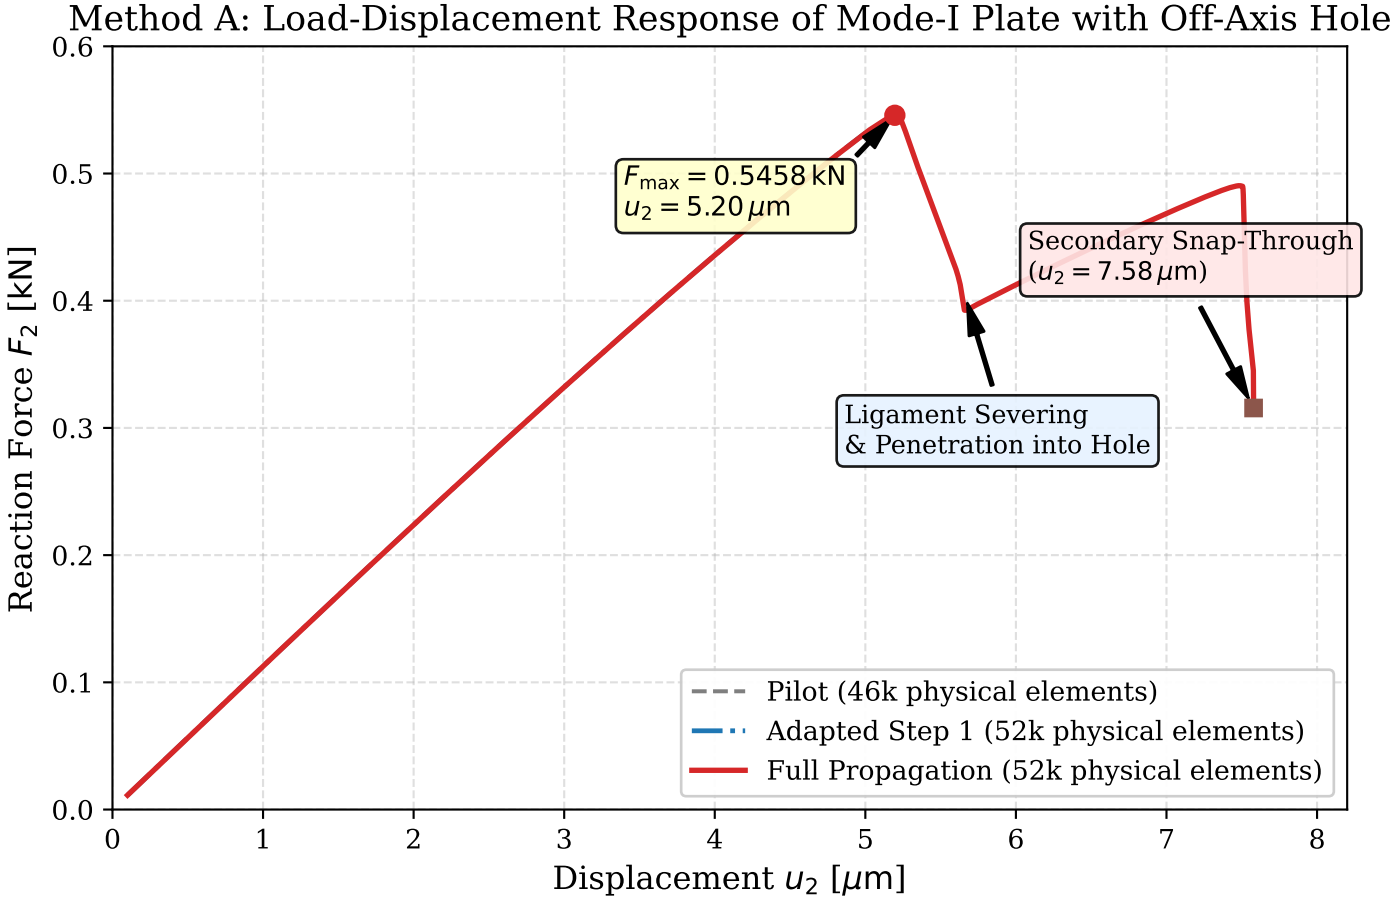
Method A: Load-Displacement Response of Mode-I Plate with Off-Axis Hole
Reaction Force $F_2$ [kN]
Displacement $u_2$ [$\mu$m]
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0
1
2
3
4
5
6
7
8
$F_{max} = 0.5458\,kN$
$u_2 = 5.20\,\mu m$
Secondary Snap-Through
($u_2 = 7.58\,\mu m$)
Ligament Severing
& Penetration into Hole
Pilot (46k physical elements)
Adapted Step 1 (52k physical elements)
Full Propagation (52k physical elements)