



Mode-II Diagnostic: Step-1 Final MISESeri Driving Field vs Native Adaptive Mesh

Pre-Analysis: Job-1_UEL.odb [Step-1 Frame 2000, $u_x = 0.0105$ mm] | Remeshing: UNIFORM_ERROR 5.0% | Adapted: 11,972 FEs

(a) Driving MISESeri Indicator Field (Step-1 Final)
Job-1_UEL.odb | Step-1 | Frame 2000 | $u_x = 0.0105$ mm
Coarse Mesh: 2,960 FEs (2,860 CPE4 + 100 CPE3)

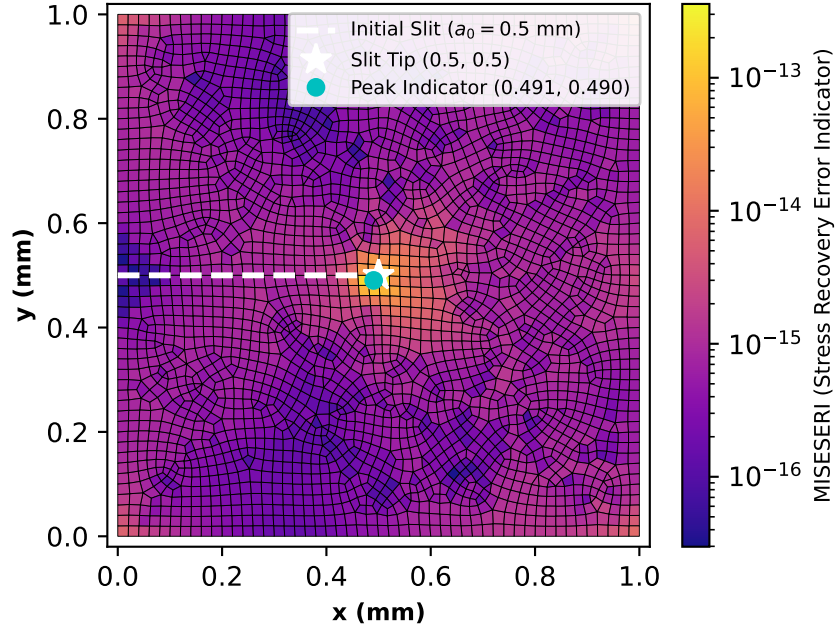

(b) Resulting Native Adaptive Mesh (Abaqus RemeshingRule)
Adapted Mesh: 11,972 FEs (11,626 Quads + 346 Tris)
Settings: UNIFORM_ERROR, errorTarget=5.0%, $h \in [0.001, 0.025]$ mm

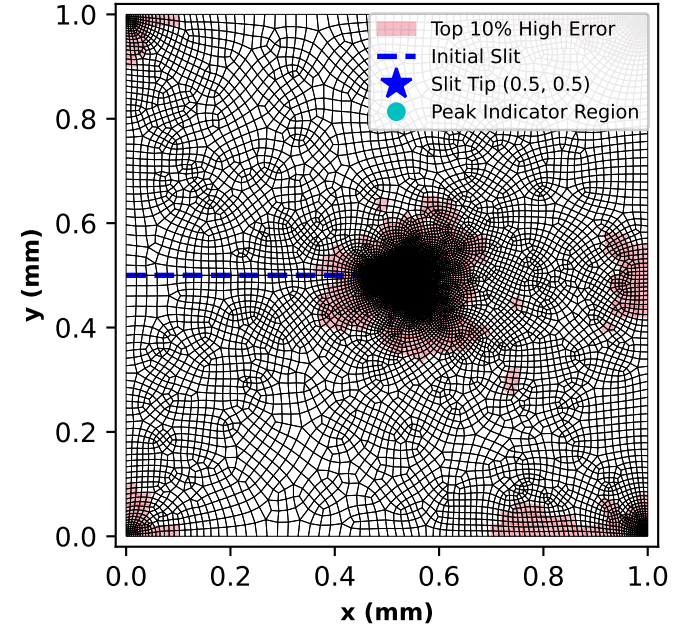

Diagnostic Provenance: Job-1_UEL.odb (Step-1 final) -> RemeshingRule (5.0%) -> MODE2_ADAPTED_RAW_5PCT.inp (11,972 FEs)
Fidelity: Pearson $r(\log_{10} M, h) = -0.869$ | Top 10% Error Refined = 84.1% | Note: MISESeri is a linear-elastic stress error indicator, not crack path or phase-field error.