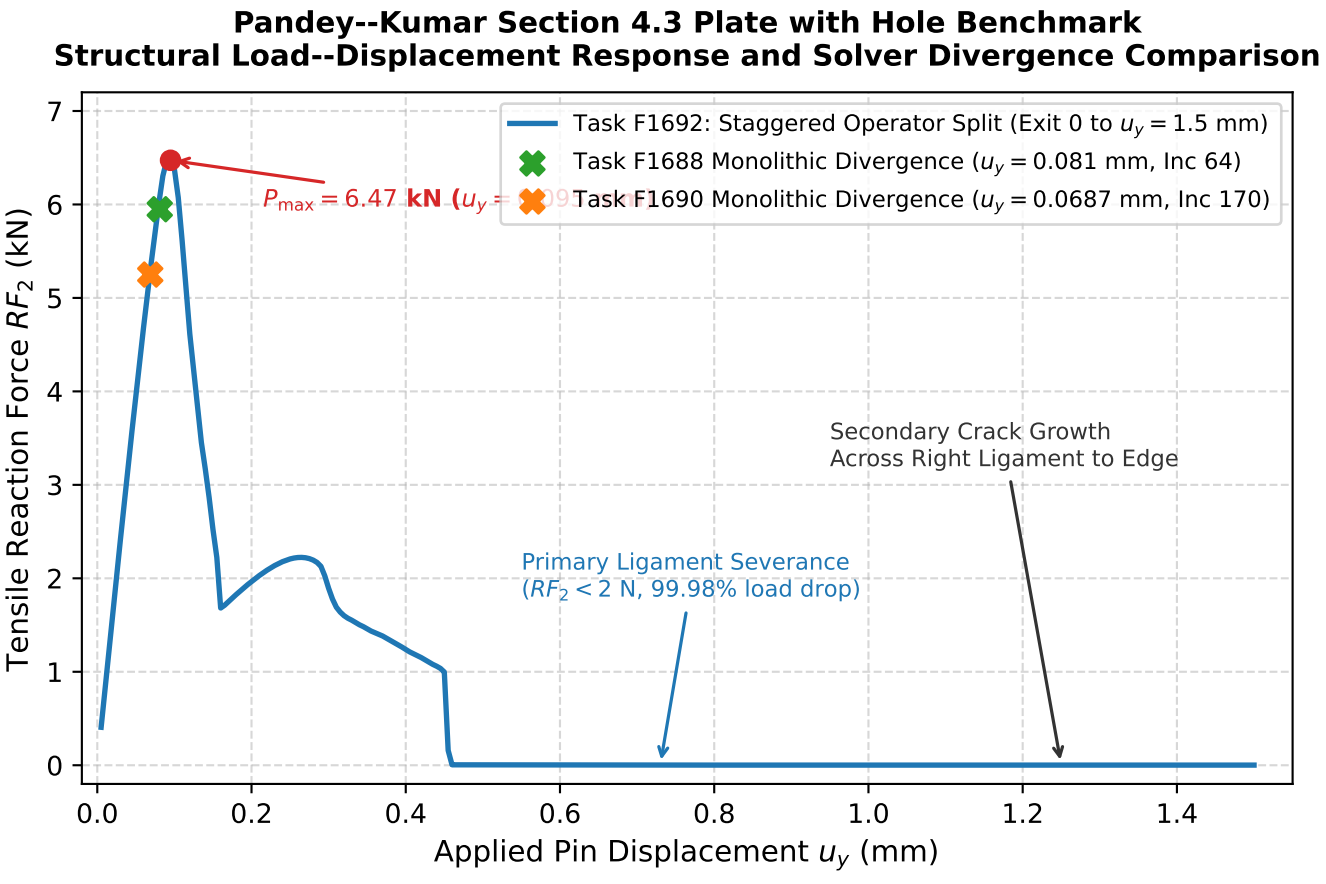
Pandey--Kumar Section 4.3 Plate with Hole Benchmark
Structural Load--Displacement Response and Solver Divergence Comparison
Task F1692: Staggered Operator Split (Exit 0 to $u_y = 1.5$ mm)
Task F1688 Monolithic Divergence ($u_y = 0.081$ mm, Inc 64)
Task F1690 Monolithic Divergence ($u_y = 0.0687$ mm, Inc 170)
$P_{max} = 6.47$ kN (u_y =
Secondary Crack Growth
Across Right Ligament to Edge
Primary Ligament Severance
($RF_2 < 2$ N, 99.98% load drop)
Tensile Reaction Force RF_2 (kN)
Applied Pin Displacement u_y (mm)
0
1
2
3
4
5
6
7
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4