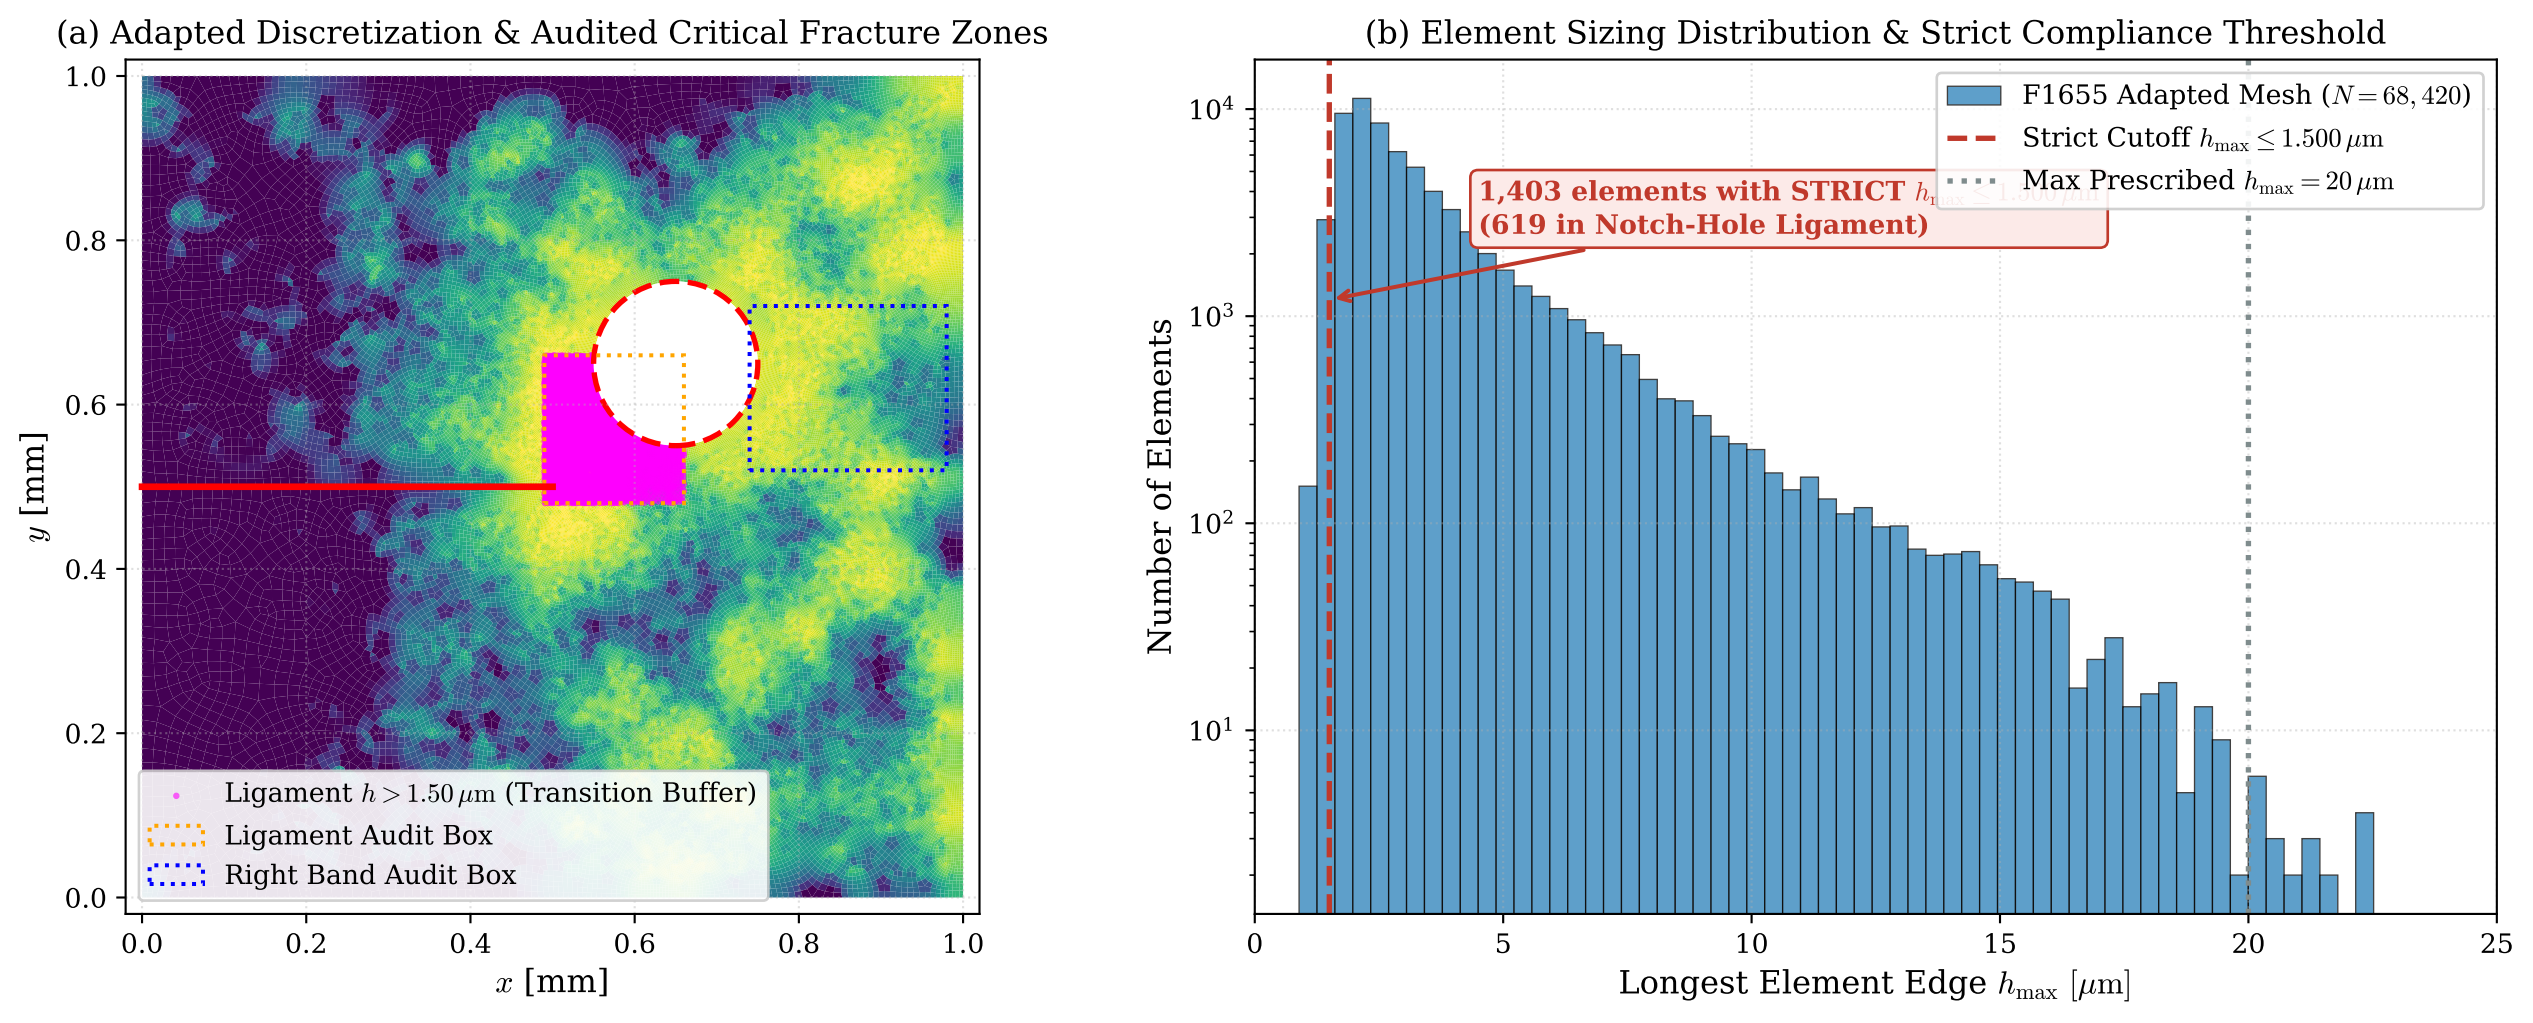

(a) Adapted Discretization & Audited Critical Fracture Zones
Ligament $h > 1.50\,\mu$m (Transition Buffer)
Ligament Audit Box
Right Band Audit Box
y [mm]
x [mm]
(b) Element Sizing Distribution & Strict Compliance Threshold
F1655 Adapted Mesh ($N = 68,420$)
Strict Cutoff $h_{\max} \leq 1.500\,\mu$m
Max Prescribed $h_{\max} = 20\,\mu$m
1,403 elements with STRICT $h_{\max} \leq 1.500\,\mu$m
(619 in Notch-Hole Ligament)
Number of Elements
Longest Element Edge $h_{\max}$ [μm]