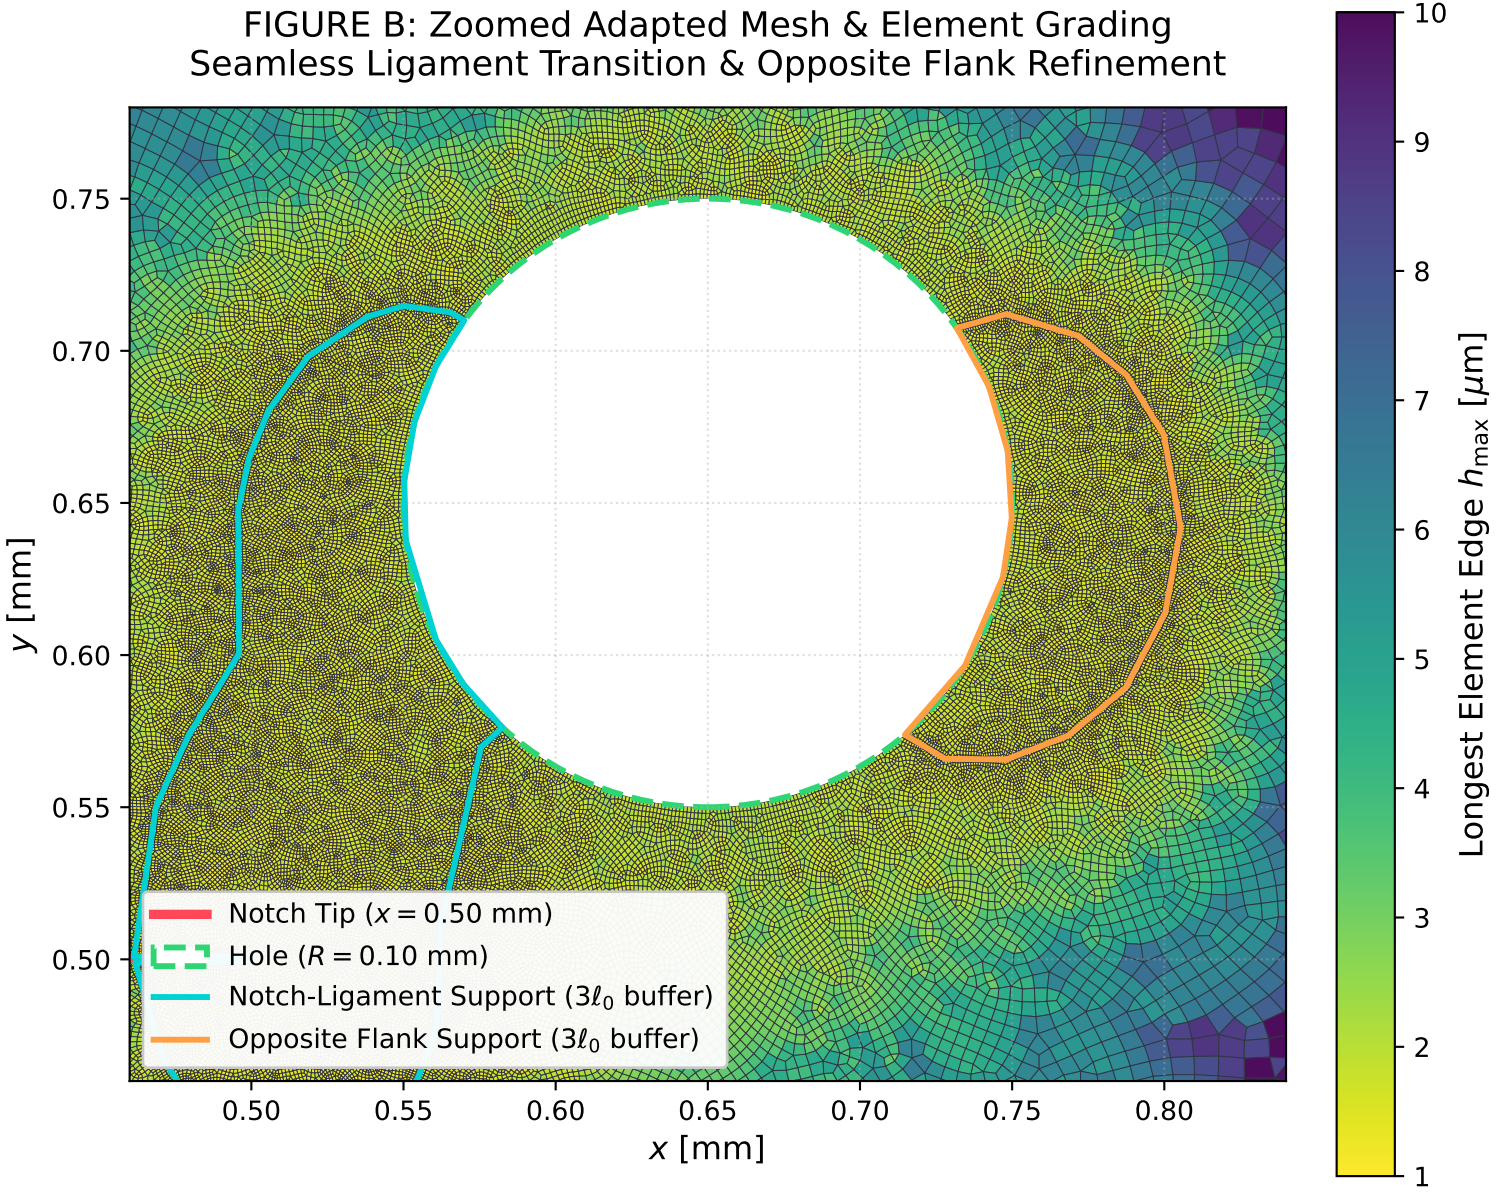

FIGURE B: Zoomed Adapted Mesh & Element Grading
Seamless Ligament Transition & Opposite Flank Refinement
Notch Tip ($x = 0.50$ mm)
Hole ($R = 0.10$ mm)
Notch-Ligament Support ($3\ell_0$ buffer)
Opposite Flank Support ($3\ell_0$ buffer)
y [mm]
x [mm]
0.50
0.55
0.60
0.65
0.70
0.75
0.80
Longest Element Edge $h_{\max}$ [μm]
1
2
3
4
5
6
7
8
9
10