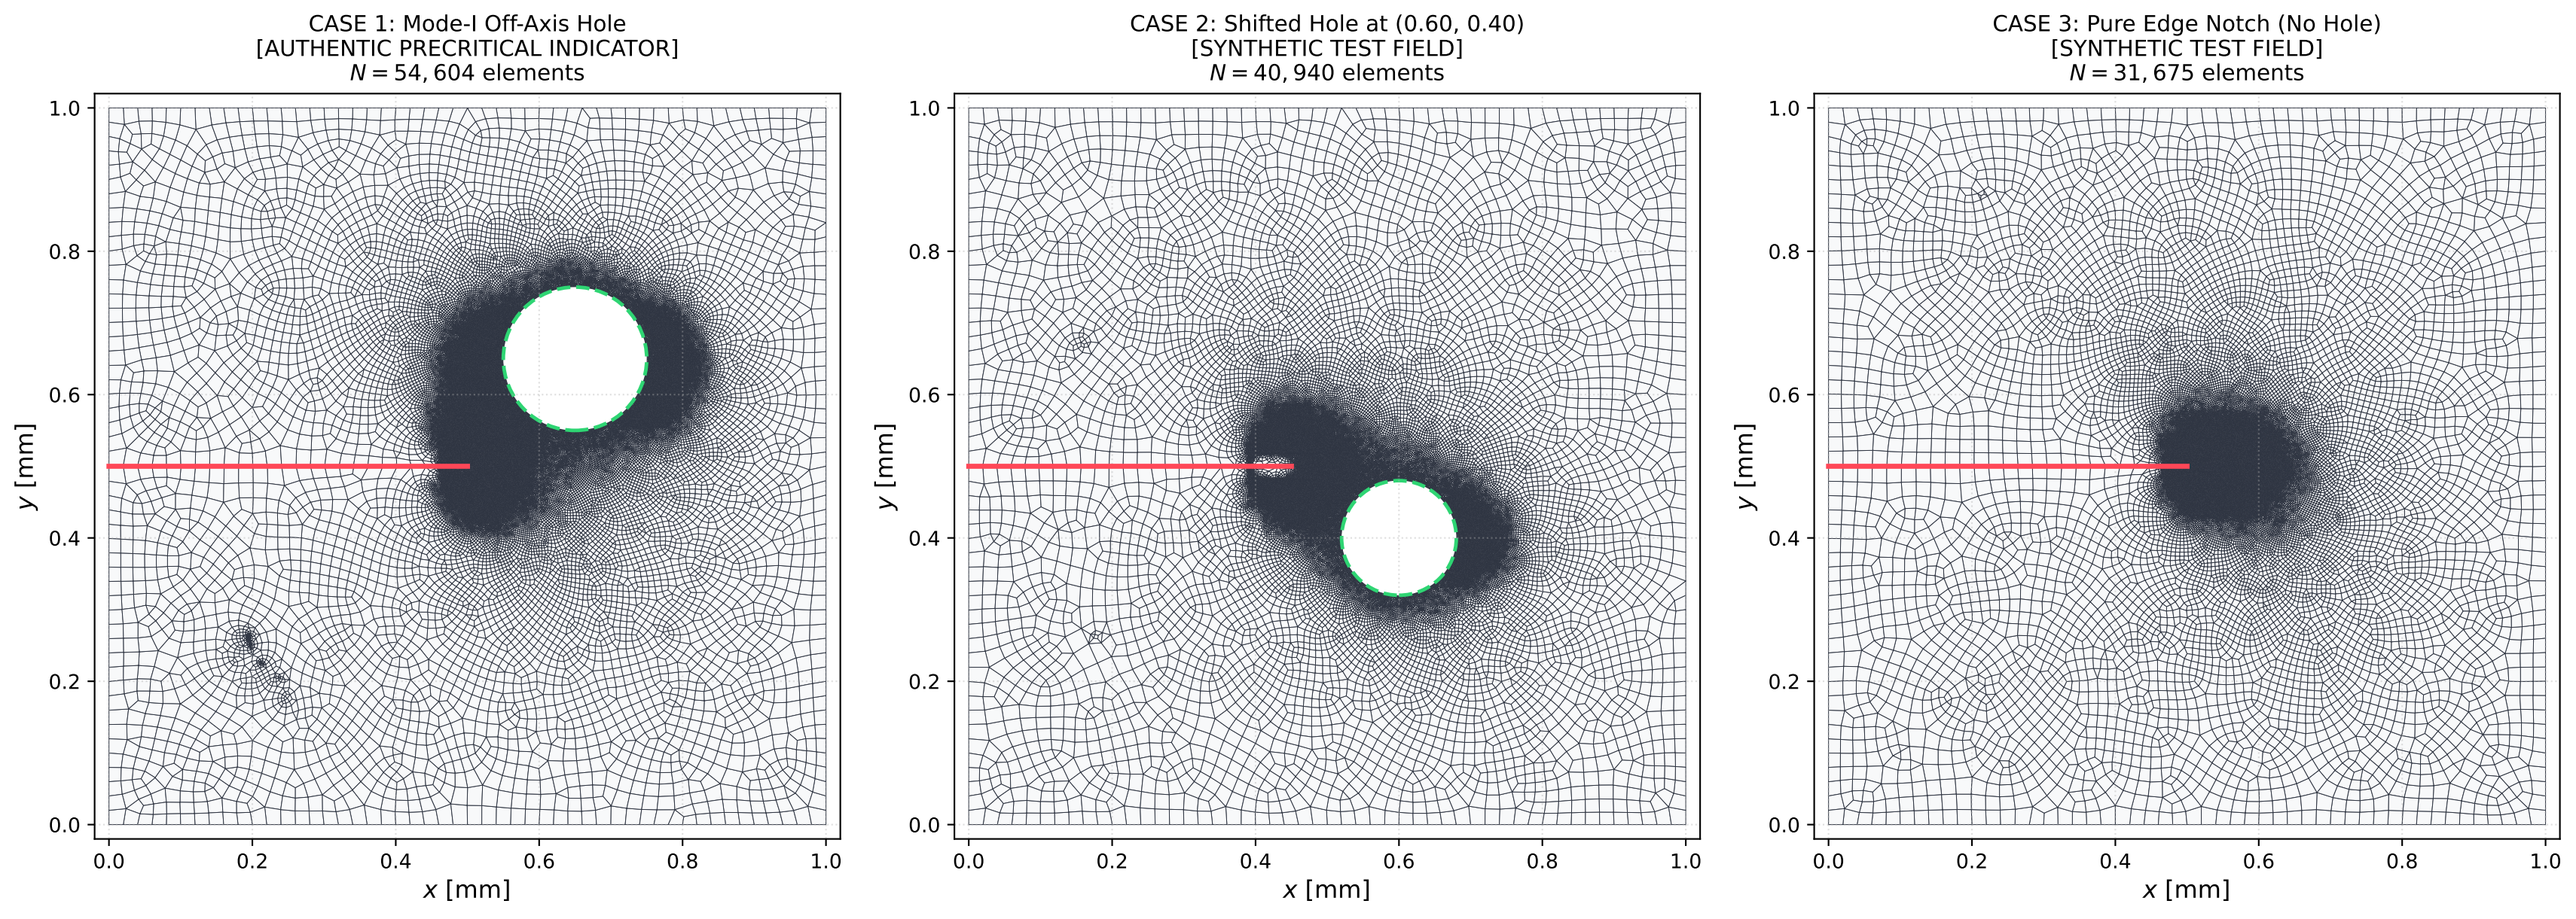

CASE 1: Mode-I Off-Axis Hole
[AUTHENTIC PRECRITICAL INDICATOR]
$N = 54,604$ elements
CASE 2: Shifted Hole at (0.60, 0.40)
[SYNTHETIC TEST FIELD]
$N = 40,940$ elements
CASE 3: Pure Edge Notch (No Hole)
[SYNTHETIC TEST FIELD]
$N = 31,675$ elements
y [mm]
x [mm]
0.0
0.2
0.4
0.6
0.8
1.0