



Haptic-Guided Shared Autonomy for Full-Scale Vehicle Teleoperation

Design and integration of force-feedback steering and motion cueing for remote vehicle operation

Parsa Ghasemi, Aspen Knox

Faculty Mentor: Dr. Behnam Bahr

Autonomous Vehicle Laboratory, California State Polytechnic University, Pomona



Motivation

Remote vehicle teleoperation is essential in hazardous and inaccessible environments [3], yet current interfaces provide **no vestibular or haptic feedback** [5], allocate control authority in a binary fashion [6], and consequently **elevate cognitive workload** [1]. This work integrates force-feedback steering, motion cueing, and continuous authority blending to address these gaps.

Objectives

This work addresses these limitations through three integrated subsystems:


1. A **haptic shared-control interface** that blends operator and autonomous steering commands through continuous force-feedback torques [1, 2]
2. An **IMU-driven motion cueing system** that reproduces vehicle dynamics on a multi-actuator platform to restore vestibular feedback [5]
3. A **full-scale drive-by-wire vehicle platform** with distributed CAN bus control and hardware watchdog safety [3]

Vehicle Platform



Parameter Specification	
Chassis	Electric UTV, 159 kg, 1.23 m wheelbase
Powertrain	48 V lithium, 1.8 kW brushless motor
Actuation	Drive-by-wire steer, throttle, brake
Bus	CAN 2.0B, 250 kbps, 4× Teensy 4.1
Compute	NVIDIA Jetson Orin AGX
GPS/IMU	Xsens MTi-680G, RTK ±5–10 cm, 100 Hz
LiDAR	Velodyne VLP-16, 16-channel
Camera	Intel RealSense D435 (RGB-D)

Haptic Shared Control — Method

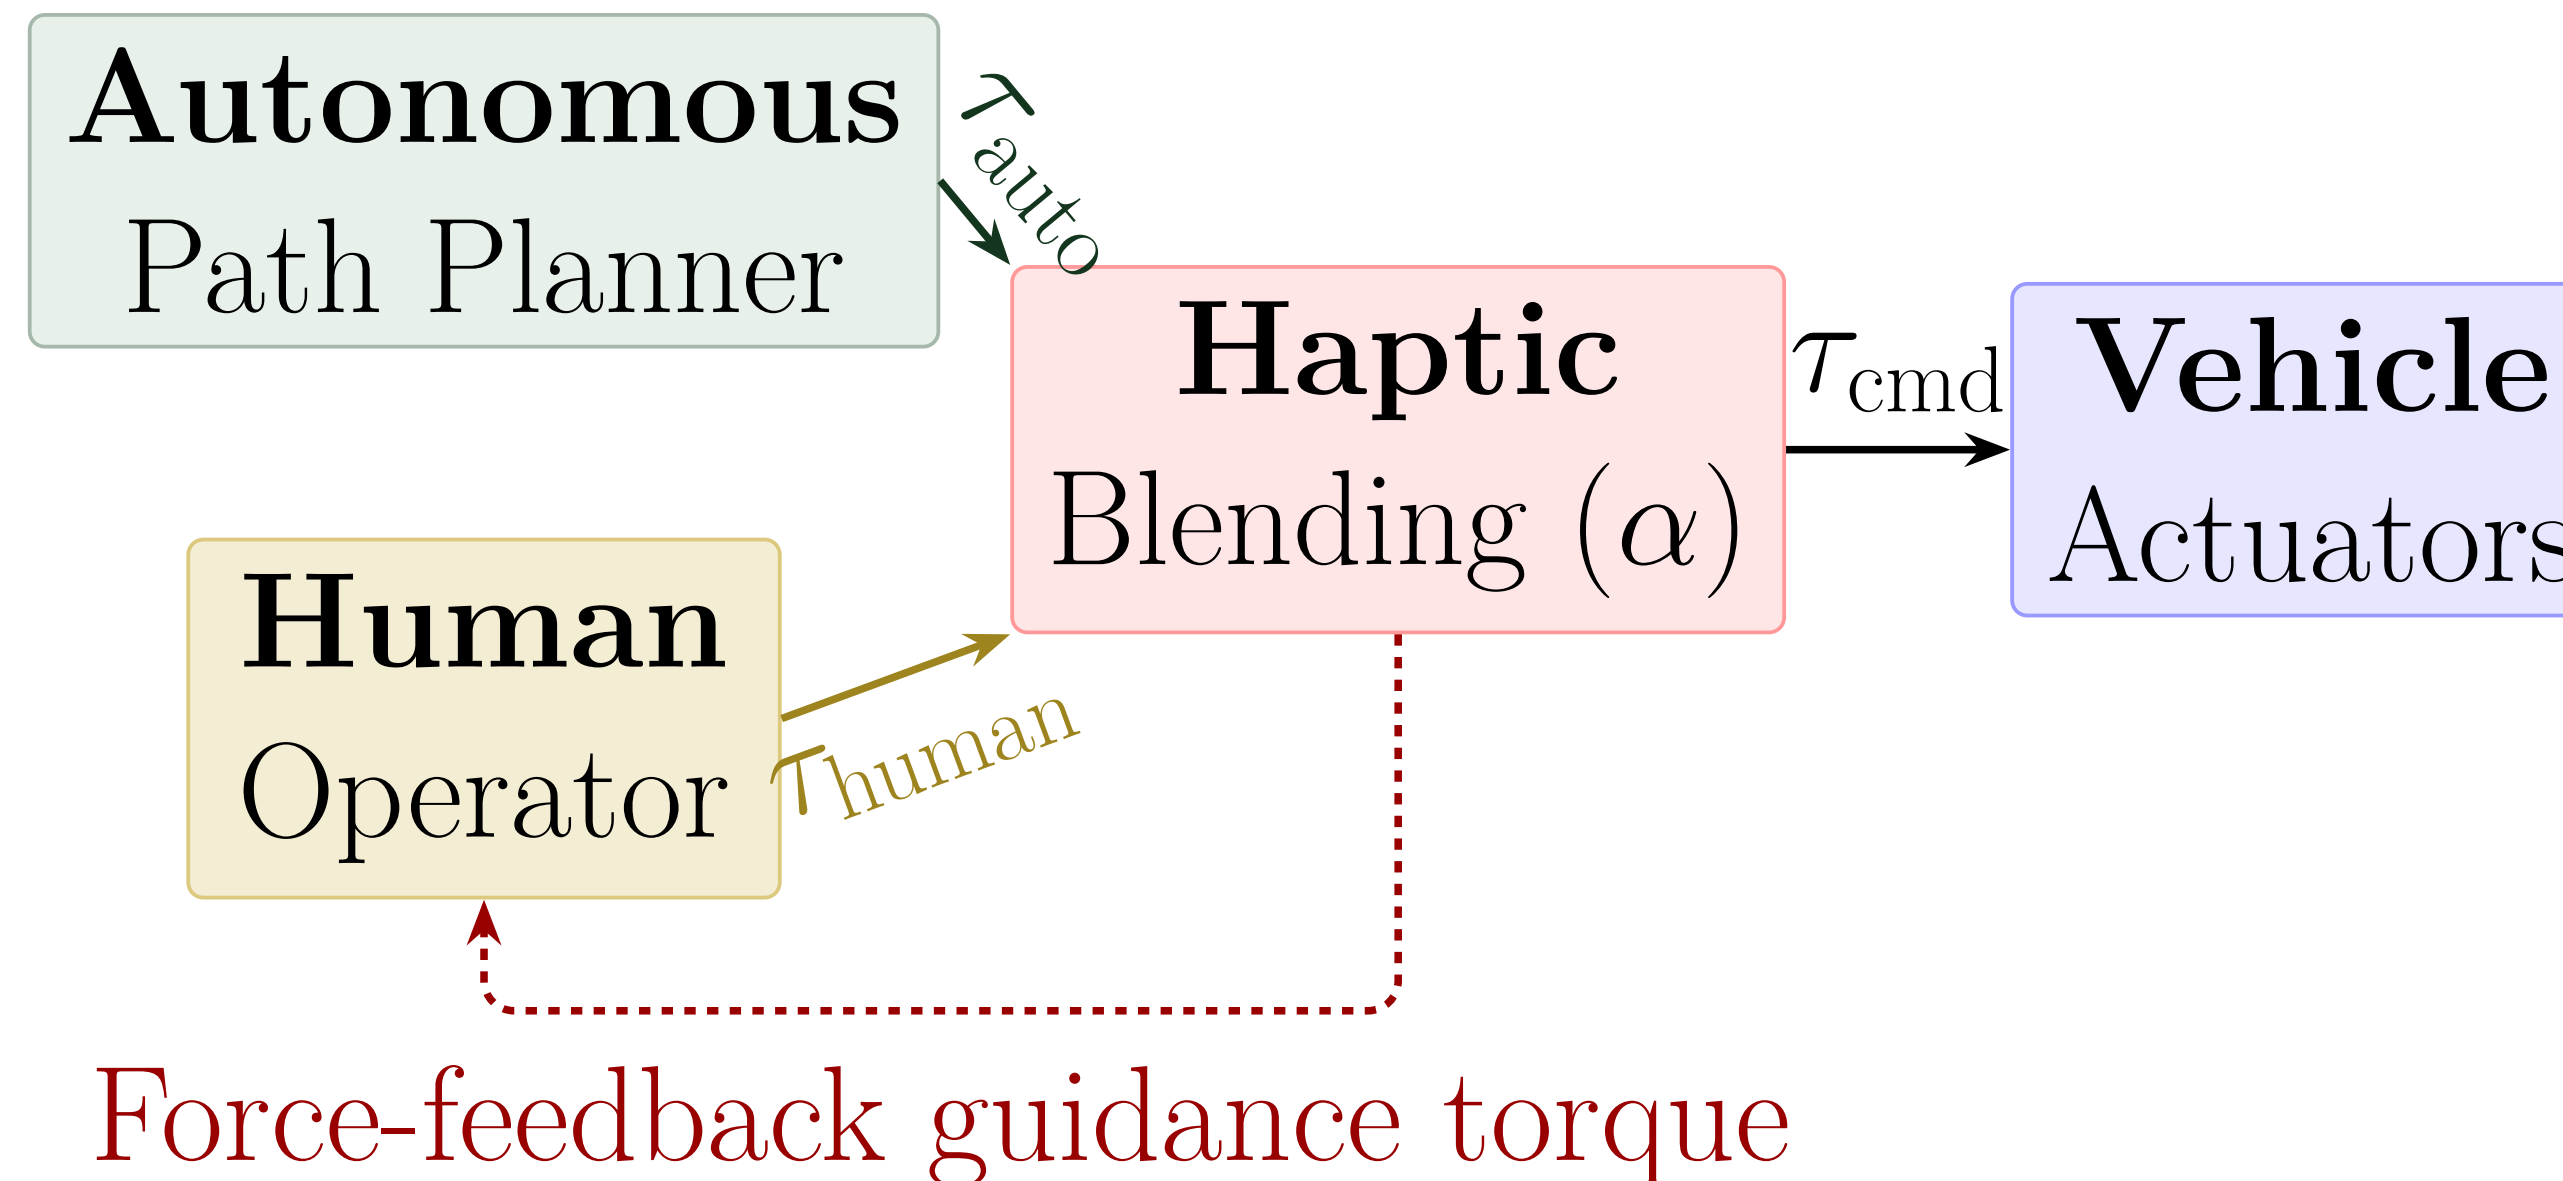

A Pure Pursuit controller [4] generates a reference steering angle from a planned path. Following the haptic shared-control paradigm [1], the deviation between the reference and current steering angle produces a guidance torque through a virtual spring model:

$$\tau_{\text{auto}} = K_s \cdot \delta_{\text{error}}$$

The operator perceives this torque as force feedback on the steering wheel [2]. The commanded actuator torque is computed as a weighted sum of the autonomous and operator inputs (input-mixing architecture) [6]:

Torque Blending Law

$$\tau_{\text{cmd}} = \alpha \tau_{\text{auto}} + (1 - \alpha) \tau_{\text{human}}, \quad \alpha \in [0, 1]$$


- $\alpha = 0$: full manual control $\longleftrightarrow \alpha = 1$: full autonomy
- α is **operator-adjustable**; at any $\alpha < 1$ the operator retains the ability to override the autonomous input [6]
- Adaptive lookahead distance: $l = \text{clip}(K_{dd} \cdot v, l_{\min}, l_{\max})$ [4]

System Characterization

Parameter	Design Target	Status
Control round-trip latency	< 50 ms	Under characterization
IMU-to-actuator latency	< 100 ms	Under characterization
Haptic rendering rate	≥ 1 kHz	Verified
CAN bus command rate	100 Hz	Verified
Watchdog timeout	500 ms	Configured
Localization accuracy (RTK)	±5–10 cm	Verified

Items marked *Verified* have been confirmed through bench-level measurement.

System Architecture

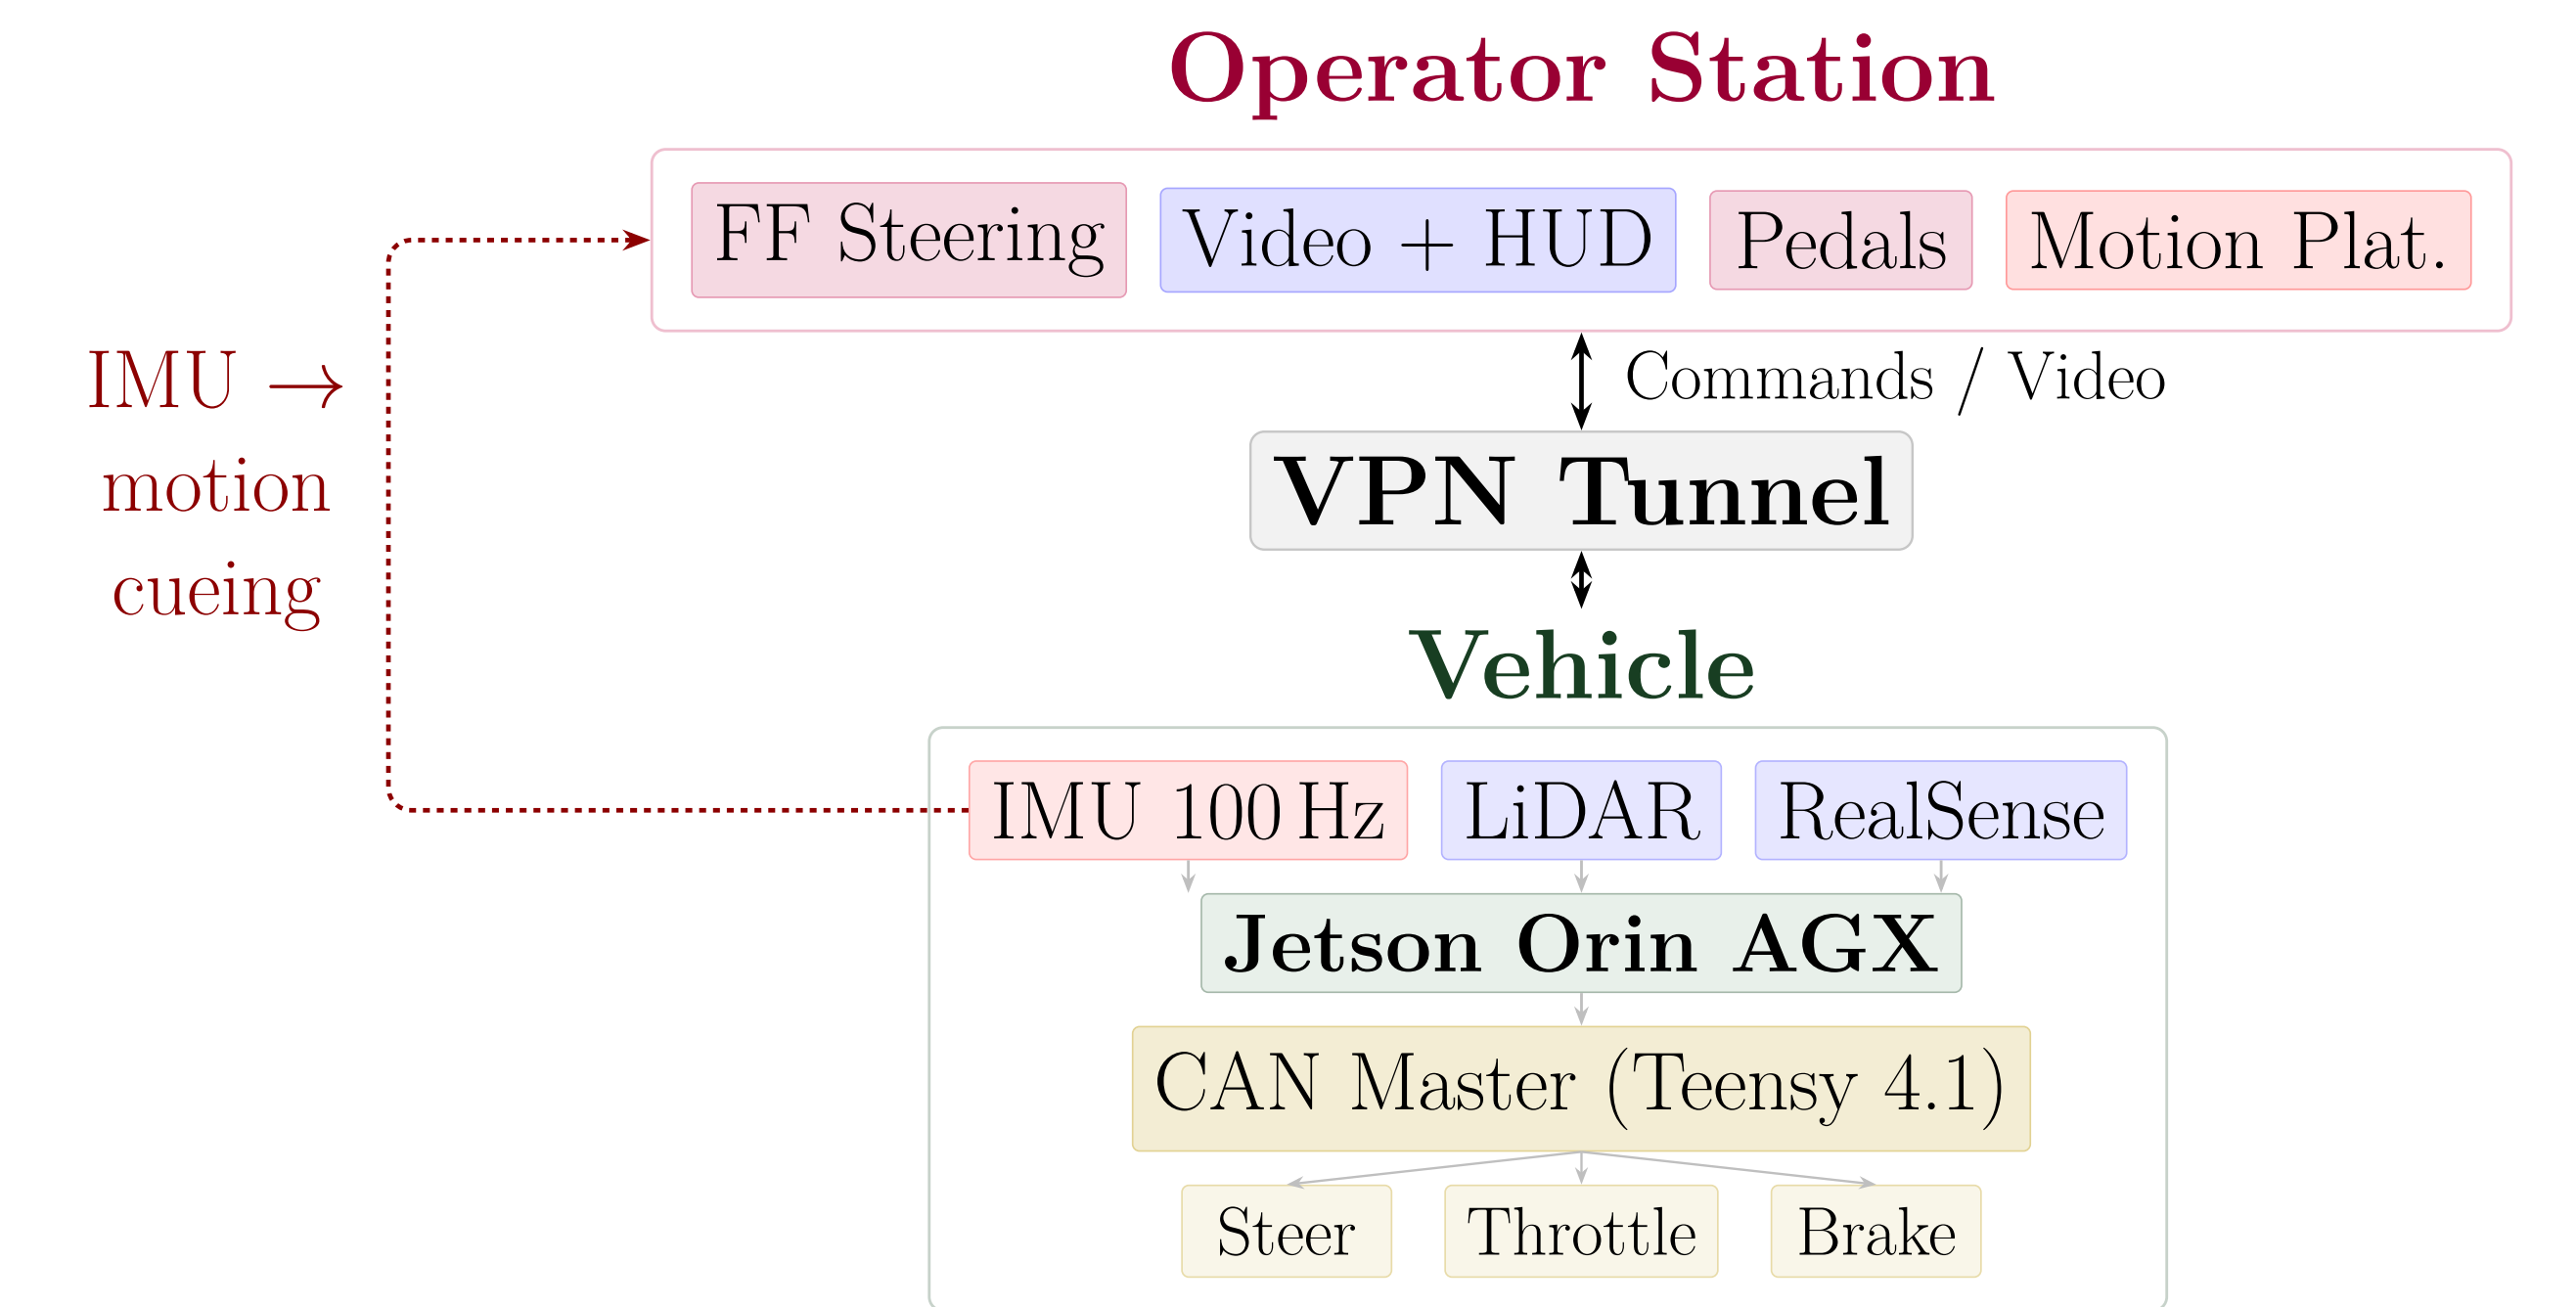

Vehicle IMU data streams over VPN to the operator station, where four suspension actuators reproduce **pitch, roll**, and road-surface vibration. Distributed CAN nodes close actuator control loops locally at 100 Hz.

Planned Evaluation

A within-subjects experiment ($n \geq 10$) will compare **direct teleoperation** against **haptic shared autonomy** using cross-track error, task completion time, NASA-TLX workload [3], and operator override frequency. Bench characterization of haptic and motion-cueing latency will precede outdoor driving trials.

Acknowledgements

This work was conducted in the Autonomous Vehicle Laboratory (AVL) at Cal Poly Pomona, directed by Dr. Behnam Bahr. Funding was provided by the Ganpat and Manju Center for International Collaboration and Innovation and the U.S. Department of Education. The authors thank Dr. Bahr and the AVL members for their contributions.

References

- [1] D. A. Abbink, M. Mulder, and E. R. Boer, “Haptic shared control: smoothly shifting control authority?” *Cognition, Technology & Work*, vol. 14, no. 1, pp. 19–28, 2012. [2] M. Steele and R. B. Gillespie, “Shared control between human and machine: using a haptic steering wheel to aid in land vehicle guidance,” *Proc. Human Factors and Ergonomics Society*, vol. 45, pp. 1671–1675, 2001. [3] T. B. Sheridan, *Telerobotics, Automation, and Human Supervisory Control*. Cambridge, MA: MIT Press, 1992. [4] R. C. Coulter, “Implementation of the pure pursuit path tracking algorithm,” CMU-RI-TR-92-01, Carnegie Mellon University, 1992. [5] J. T. Reason and J. J. Brand, *Motion Sickness*. London: Academic Press, 1975. [6] F. Flemisch, C. A. Adams, S. R. Conway, K. H. Goodrich, M. T. Palmer, and P. C. Schutte, “The H-metaphor as a guideline for vehicle automation and interaction,” NASA/TM-2003-212672, 2003.