EK-23133-000

SHT I.I

NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.


 $2,77\pm0,05$

 $[.109\pm.002]$

 $3,99\pm0,02$ $[.157\pm.001]$


 $5,56\pm0,02$ [.219 + .001]

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ± 0 , |7 [.007].

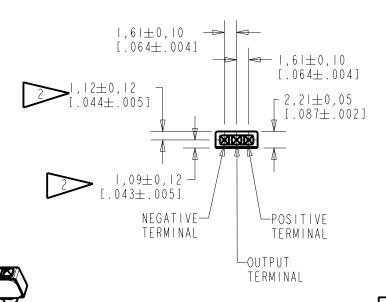

 $1,87\pm0,06$

 $[.0735 \pm .0025]$

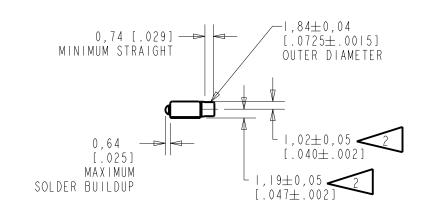


NOMINAL WEIGHT .13 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

Revision	C.O. # Implementation Date RELEASE LEVEL				REVISION
A	M10101029	2 - 28 - 06	Release	A	
SCALE:	SCALE: 2:1				
	MMM CK. BY	2 - 28 - 06 DATE			
TITLE:	MIC	ROPHONE	EK-23133-000	GJP APP. BY	3 - 22 - 06
	OUTL	INE DRAWING	SHT I.I	G J P ASIZE, FRM	3 - 22 - 06 Rev: B

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pa (N/M 2) FOR CONDITIONS SHOWN BELOW.

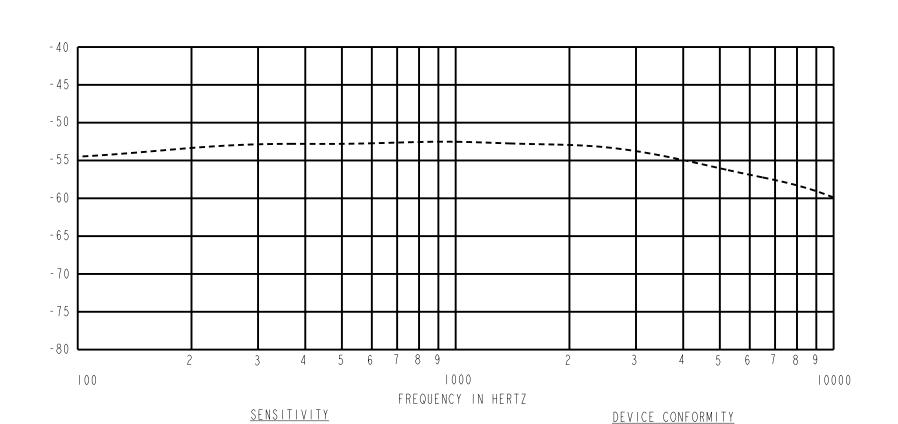

MAX.

- - -

-51.0

NOTES:

I. CASE CONNECTED TO NEGATIVE TERMINAL.

FREQUENCY

100

1000

8000

- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.

NOM.

-54.5

-53.0

-58.5

4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.

MIN.

- - -

-55.0

5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

	PORT	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (I kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS		CAPACITANCE ±50%			
	LOCATION					MIN.	NOM.	MAX.	OUTPUT TO NEGATIVE	OUTPUT TO POSITIVE	POS. TO NEGATIVE
Ī	128	1.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800	N/A	N / A	N/A

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Released	ι Δ
А	M10101029	2 - 28 - 06	11010000	/ \

SHT 2.1

RANGE OF DEVIATION FROM IKHZ

0.0

0.0

-2.5

-5.0

0.0

-8.5

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION PR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR HMMM

CK. BY

TITLE: MICROPHONE EK-23133-000

GJP

PERFORMANCE SPECIFICATION

MMM 2-28-06
CK. BY DATE
GJP 3-22-06
APP. BY DATE
GJP 3-22-06

DATE