



**TECHNISCHE  
UNIVERSITÄT  
DRESDEN**



---

**Fakultät Elektrotechnik und Informationstechnik** Institut für Automatisierungstechnik

---

# BACHELOR THESIS

zum Thema

Image Based Visual Servoing for Aerial Robot

vorgelegt von Pablo Rodríguez Robles  
im Studiengang Aerospace Engineering, Jg. 2014  
geboren am 28.02.1996 in León, Spain

Betreuer: Dipl.-Ing. Chao Yao  
Verantwortlicher Hochschullehrer: Prof. Dr. techn. Klaus Janschek  
Tag der Einreichung: 27.03.2018

# Aufgabenstellung

Test der PDF-Integration

# Achtung

Auch wenn die Möglichkeit besteht, die eingescannte Aufgabenstellung als PDF zu integrieren, muss in **einem einzureichendem Exemplar** die Aufgabenstellung **im Original** eingebunden werden.



**TECHNISCHE  
UNIVERSITÄT  
DRESDEN**



---

**Fakultät Elektrotechnik und Informationstechnik** Institut für Automatisierungstechnik

---

## **Image Based Visual Servoing for Aerial Robot**

Hier muss der Text für die deutsche Kurzfassung inklusive eines aussagekräftigen Bildes eingefügt werden.

Betreuer: Dipl.-Ing. Chao Yao  
Hochschullehrer: Prof. Dr. techn. Klaus Janschek  
Tag der Einreichung: 27.03.2018

---

Bearbeiter: Pablo Rodríguez Robles



**TECHNISCHE  
UNIVERSITÄT  
DRESDEN**



---

**Fakultät Elektrotechnik und Informationstechnik** Institut für Automatisierungstechnik

---

## **Image Based Visual Servoing for Aerial Robot**

Here an English abstract including one significant image must be inserted.

Tutor: Dipl.-Ing. Chao Yao  
Supervisor: Prof. Dr. techn. Klaus Janschek  
Day of Submission: 27.03.2018

---

**STUDENT RESEARCH THESIS**

**Author: Pablo Rodríguez Robles**

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Motivation and Background . . . . .	1
1.2	Aims and Objectives . . . . .	2
<b>2</b>	<b>Theoretical Background and State of the Art</b>	<b>3</b>
<b>3</b>	<b>Software Requirements Specification and Structured Analysis</b>	<b>4</b>
3.1	Software Requirement Specification . . . . .	4
3.1.1	Product Perspective . . . . .	4
3.1.2	User Characteristics . . . . .	5
3.1.3	Assumptions and Dependencies . . . . .	5
3.1.4	Functional Requirements . . . . .	5
3.1.5	Other Requirements . . . . .	6
3.1.6	General Constraints . . . . .	6
3.2	Structured Analysis . . . . .	6
<b>4</b>	<b>Visual Servoing Algorithm Description</b>	<b>9</b>
<b>5</b>	<b>Implementation of the Visual Servoing Controller</b>	<b>10</b>
<b>6</b>	<b>Final Results and Conclusions</b>	<b>11</b>
<b>7</b>	<b>Future Work</b>	<b>12</b>

**List of Figures**

3.1	Context diagram . . . . .	7
3.2	Data flow diagram - Level A . . . . .	8

**List of Tables**

## List of Listings



# 1 Introduction

## 1.1 Motivation and Background

During the last decade, the use of Unmanned Aerial Vehicles (UAVs) has spread among very different applications. The use of flying robots can be very helpful to improve the way some tasks are already achieved by terrestrial robots. For example, object transportation, environment mapping or surveillance. At the Institute of Automation Engineering<sup>1</sup> of the Technical University of Dresden, a drone is being developed in cooperation with the Institute of Solid Mechanics<sup>2</sup> to investigate the use of flying robots in aerial manipulation.

When dealing with manipulation of objects, it is desired that the aerial robot adopts a certain pose with respect to the target before the manipulation process really starts. The present work deals with the development of a Visual Servoing (VS) control system that helps a quadrotor robot to acquire the desired pose by means of image data.

A monocular monochrome camera as well as an Inertial Measurement Unit (IMU) are planned to be the only available on board sensors. For the controller proposed the feedback is directly computed from image features rather than estimating the robot's pose and using the pose errors as control input.

In order to integrate the visual servoing algorithm into the future modular robot system, the algorithm has been designed and tested on a underactuated conventional quadrotor. The aerial robot is implemented within the ROS<sup>3</sup> framework, where the visual servoing controller developed for this thesis is also integrated. Instead of using real hardware the complete system is simulated using Gazebo<sup>4</sup>.

---

<sup>1</sup>Technische Universität Dresden. Institut für Automatisierungstechnik. 01062 Dresden, Germany

<sup>2</sup>Technische Universität Dresden. Institut für Festkörpermechanik. 01062 Dresden, Germany

<sup>3</sup>[www.ros.org](http://www.ros.org)

<sup>4</sup>[www.gazebosim.org](http://www.gazebosim.org)

## 1.2 Aims and Objectives

The aim of this work is to implement and test a VS control algorithm for a quadrotor, which could be later used by the Flypulator (TODO: Add reference) project. This includes the review of the state of the art with regard to Visual Servoing, the design of a solution and a prototypical implementation with in the ROS framework and simulation with Gazebo of a test case.

The present thesis documents comprehensively the theoretical background, implementation details and results of the conducted work through the following structure. In Chapter 2 the theoretical background and state of the art of Visual Servoing is presented. Chapter 3 gives a description of the system requirements as well as the system decomposition by Structure Analysis (SA) **SA\_Braune** Chapter 4 describes the solution developed and the algorithms to be tested. Chapter 5 deals with the implementation, testing and validation. Finally, Chapter 6 contains the final results and conclusions and Chapter 7 suggests future improvement and research paths.

## **2 Theoretical Background and State of the Art**

## 3 Software Requirements Specification and Structured Analysis

This chapter deals with the Software Requirement Specification (SRS) **IEEE8301998** and the Structured Analysis **SA\_Braune** of the system developed in this work. Thanks to these two procedures, the objectives that the system must fulfil and a decomposition of it into different functions are stated. This leads to a complete definition of the system.

The purpose of this work is to design a Visual Servoing controller to provide an underactuated aerial robot the commands necessary to reach a desired pose with respect to a target object.

The VS controller developed is to be integrated into the hector\_quadrotor **2012simpar\_meyer** an underactuated aerial robot equipped with a monocular monochrome camera pointing downwards.

### 3.1 Software Requiremet Specification

In this section the Software Requirement Specification **IEEE8301998** for the Visual Servoing controller developed in this thesis is presented. Using SRS helps to define the system that is being designed, tracking continuously that the product developed satisfies the needs of the user. Only when every requirement stated therein is fulfilled the implementation would be completed.

#### 3.1.1 Product Perspective

The VS controller is to be used with an aerial robotic system based on the ROS framework. From the perspective of the robotic system, the VS controller subsystem will appear as a ROS node which publishes control commands through a ROS topic to the rest of the system.

The used aerial robotic system is the hector\_quadrotor<sup>1</sup> model **2012simpar\_meyer** (TODO: Add diagram).

---

<sup>1</sup>[wiki.ros.org/hector\\_quadrotor](http://wiki.ros.org/hector_quadrotor)

The subsystem developed here is to interact with the camera hardware of the robot, a monocular monochrome camera pointing downwards (TODO: Add hardware). The output of the subsystem are the control inputs of the aerial robot dynamics (TODO: Add which are the quadrotor control inputs), this inputs interact with the inner control loop for the attitude and outer control loop for the position already implemented in the robotic system (TODO: Position loop is not related to vs system, but can be useful for benchmark).

#### 3.1.2 User Characteristics

The product developed in this thesis will be used as part of a ROS-based system, thus the expected user is a designer willing to implement a VS control strategy for his robotic system. The user should be familiarized with the ROS framework and the system will need the structure and interfaces of any standard ROS product.

#### 3.1.3 Assumptions and Dependencies

The software has been tested on the following platforms, forward or backward support is not guaranteed on a different set-up.

- ROS version: ROS Indigo<sup>2</sup>
- Operating System: Ubuntu 14.04<sup>3</sup> Trusty Tahr, 64 bit

#### 3.1.4 Functional Requirements

The functional requirements describe what the system must do to complete the overall task:

- F1: *Give visual servoing control input.* Control input based on image data so that the aerial robot comes closer to the target pose. Control as a difference on the image features, no pose estimation.
- F2: *Tell user when the target pose is achieved.* The system must be able of telling the user whether the target pose has been already achieved or not.

---

<sup>2</sup><http://wiki.ros.org/indigo>

<sup>3</sup><http://releases.ubuntu.com/14.04/>

### 3.1.5 Other Requirements

- A1: All components are working reliably.
- A2: The software is sufficiently fast, modular and modifiable.
- A3: The implementation is transparent and comprehensible.
- A4: Control inputs must provide stable and smooth flight manoeuvres.
- A5: Robot must be able to start from different initial positions.
- A6: Algorithm must be fast enough to allow real time control of the aerial robot.
- A7: The implementation should follow the style guide of ROSROS\_\_Style

### 3.1.6 General Constraints


- The environment must be sufficiently illuminated for the camera to work.
- The target pose must be provided by a sufficient number of features (TODO: How many?) in form of a 2D code (TODO: At least in the first version).
- The target must be always in the field of view of the camera, so features can be extracted and control input computed.
- Testing computer is a MacBook Pro<sup>4</sup> (Early 2015) with 2.7 GHz Intel Core i5 processor, 8 GB 1867 MHz DDR3 memory and Intel Iris Graphics 6100 1536 MB graphics. Linux OS is run using Oracle VM VirtualBox<sup>5</sup> (Version 5.1.14 r112924) with 5 GB base memory and two processors.

## 3.2 Structured Analysis


---

<sup>4</sup>[https://everymac.com/systems/apple/macbook\\_pro/specs/macbook-pro-core-i5-2.7-13-early-2015-retina-display-specs.html](https://everymac.com/systems/apple/macbook_pro/specs/macbook-pro-core-i5-2.7-13-early-2015-retina-display-specs.html)

<sup>5</sup>[www.virtualbox.org](http://www.virtualbox.org)

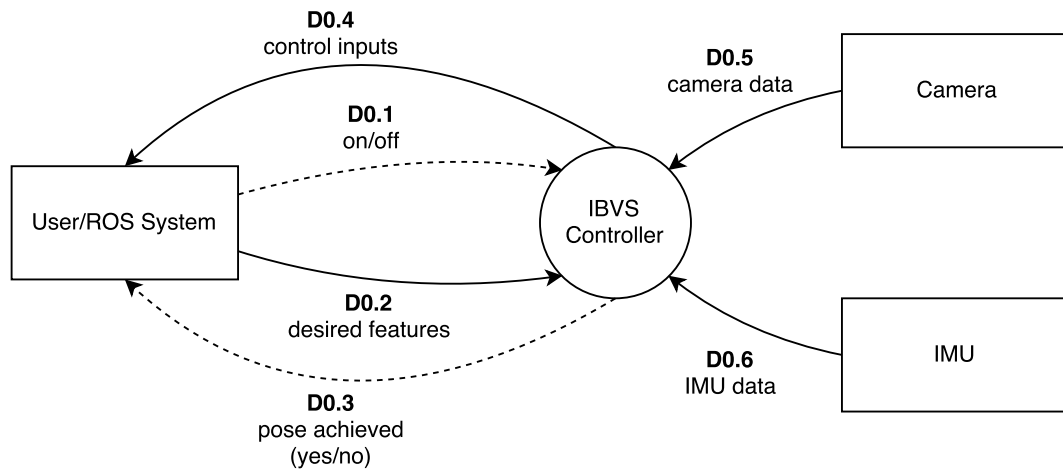

**Figure 3.1:** Context diagram

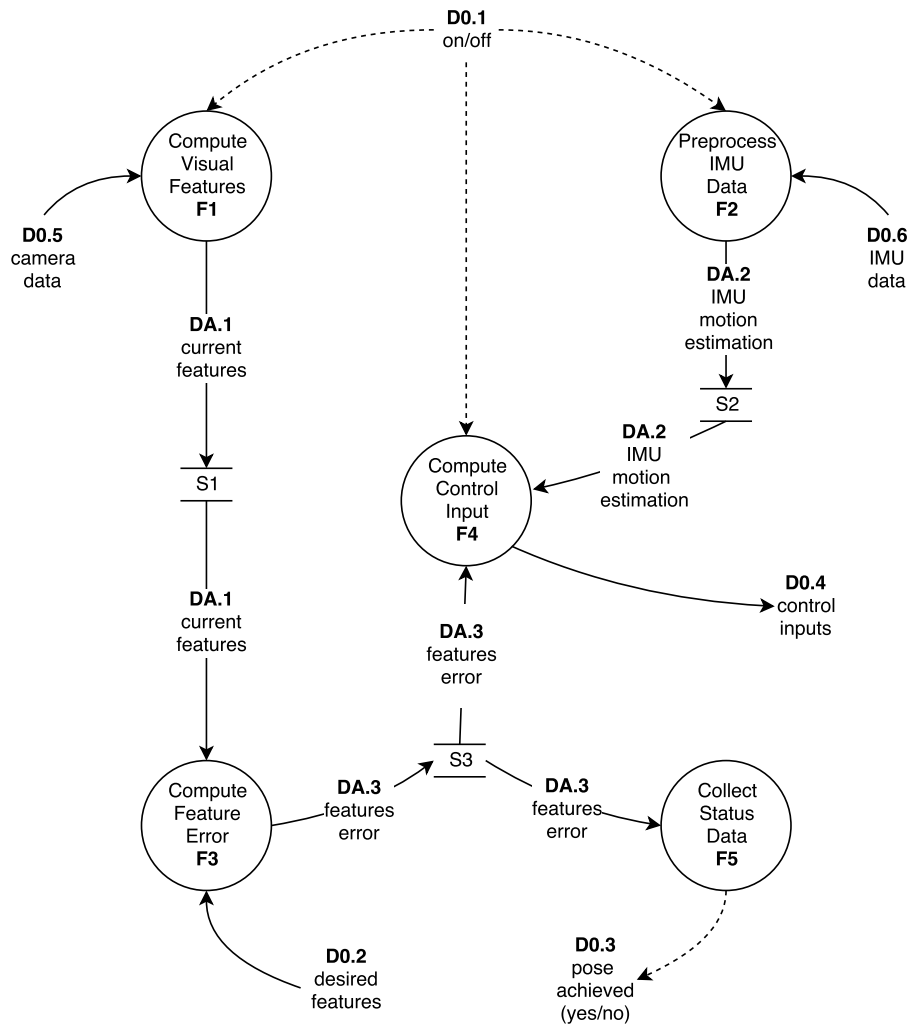

**Figure 3.2:** Data flow diagram - Level A



## **4 Visual Servoing Algorithm Description**

## **5 Implementation of the Visual Servoing Controller**

## **6 Final Results and Conclusions**

## **7 Future Work**

## **Selbstständigkeitserklärung**

Hiermit versichere ich, Pablo Rodríguez Robles, geboren am 28.02.1996 in León, Spain, dass ich die vorliegende Bachelor Thesis zum Thema

*Image Based Visual Servoing for Aerial Robot*

ohne unzulässige Hilfe Dritter und ohne Benutzung anderer als der angegebenen Hilfsmittel angefertigt habe; die aus fremden Quellen direkt oder indirekt übernommenen Gedanken sind als solche kenntlich gemacht. Bei der Auswahl und Auswertung des Materials sowie bei der Herstellung des Manuskripts habe ich Unterstützungsleistungen von folgenden Personen erhalten:

*Dipl.-Ing. Chao Yao*

Weitere Personen waren an der geistigen Herstellung der vorliegenden Bachelor Thesis nicht beteiligt. Mir ist bekannt, dass die Nichteinhaltung dieser Erklärung zum nachträglichen Entzug des Diplomabschlusses (Masterabschlusses) führen kann.

Dresden, den 27.03.2018

.....  
Unterschrift