TECHNICAL DATA SHEET 17

Upholstered Panel DuoBig y DuoSmall



SPECIFICATIONS

Product Name:

Upholstered Panel DuoBig y DuoSmall

Format (Length × Width):

Duo Big: 3,94 ft x 15,75 In / Duo Small: 3,61 ft x 7,87 In

Weight:

0,10 lbs x ft2

Packaging:

Unit

Thickness

Duo Big: 1,378 In / Duo Small: 0,984 In

Density

Approximately 15 kg/m²

Main Material:

High-quality synthetic leather and polyurethane foam

Country of Origin:

China

ADVANTAGES & BENEFITS




ABOUT THE PRODUCT

The Duo Big and Duo Small Upholstered Panel is a decorative and functional system designed to provide acoustic comfort, visual softness, and high aesthetic value to interior spaces. Its curved, modular geometry creates a continuous vertical pattern that helps reduce sound reverberation and improves the acoustic performance of the environment.

Manufactured with a polyurethane foam core and upholstered in high-quality synthetic leather, the panel offers a uniform, enveloping, and durable texture. The controlled thickness of each format ensures effective acoustic performance without compromising a clean, refined look, making it an ideal solution for contemporary interior design projects seeking warmth, sound control, and style.

Available in 4 colors:

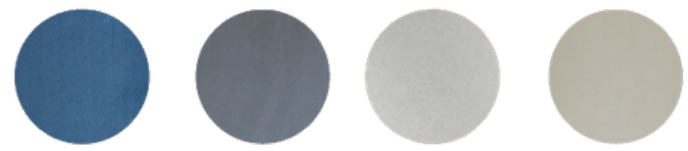

USES AND APPLICATIONS

- **Wall Cladding:** Decorative wall panels for children's bedrooms, daycare centers, play areas, and themed rooms.
- **Environments:** Commercial and lounge spaces seeking a decorative aesthetic with acoustic functionality (cafés, boutiques, waiting areas).
- **Other:** Spaces requiring moderate reverberation control without compromising design.

INSTALLATION GUIDE

Tools: Measuring tape, utility knife or precision cutter, level or bubble level, gloves, construction adhesive or metal clips for fastening, clean cloth.

1. **Surface Preparation:** The wall must be clean, dry, and free of dust, moisture, or grease.
2. **Cutting/Layout:** Mark the panel layout on the wall using a level and pencil before starting installation.
3. **Installation:** Apply construction adhesive in an "S" pattern or in dots on the back of the panel. Press firmly against the wall for at least 30 seconds.
4. **Finishing:** Check alignment between panels and cover visible joints with decorative trims or joint covers if needed.
5. **Maintenance:** Clean with a dry or slightly damp cloth. For stains, use mild soap and water. Avoid solvents, sandpaper, or abrasive products that may damage the fabric.

WARRANTY POLICIES

- Verify and accept the product in good condition at the time of delivery. Claims for missing items, damage, or impacts will not be accepted after receipt of the merchandise.
- UNITEC USA DESIGN does not cover warranties for installed products showing differences in size, shade, color, scratches, warping, or any visible defect that could have been detected prior to installation.
- If any of these defects are found, do not install the product and contact the corresponding sales representative immediately.
- The warranty does not cover damage caused by improper use or handling.
- Follow the technical data sheet recommendations regarding use, applications, and installation.