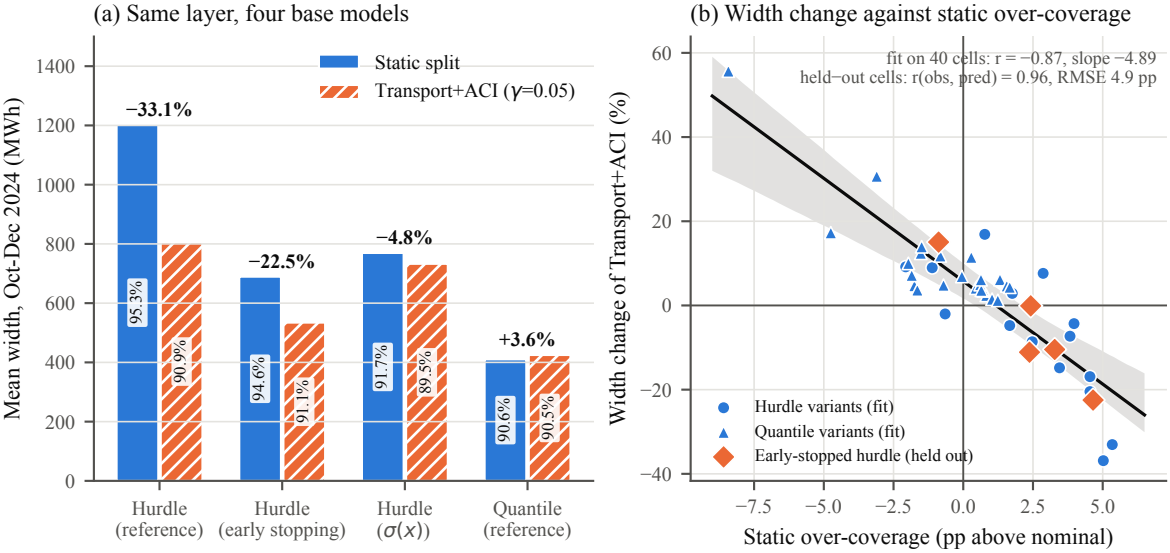

(a) Same layer, four base models
Static split
Transport+ACI (γ=0.05)
Mean width, Oct-Dec 2024 (MWh)
1400
1200
1000
800
600
400
200
0
−33.1%
−22.5%
−4.8%
+3.6%
95.3%
90.9%
94.6%
91.1%
91.7%
89.5%
90.6%
90.5%
Hurdle (reference)
Hurdle (early stopping)
Hurdle (σ(x))
Quantile (reference)
(b) Width change against static over-coverage
fit on 40 cells: r = −0.87, slope −4.89
held−out cells: r(obs, pred) = 0.96, RMSE 4.9 pp
Width change of Transport+ACI (%)
60
40
20
0
−20
−40
Hurdle variants (fit)
Quantile variants (fit)
Early-stopped hurdle (held out)
−7.5
−5.0
−2.5
0.0
2.5
5.0
Static over-coverage (pp above nominal)