


7. SERIAL COMMUNICATION USING ARDUINO WITH PROTEOUS

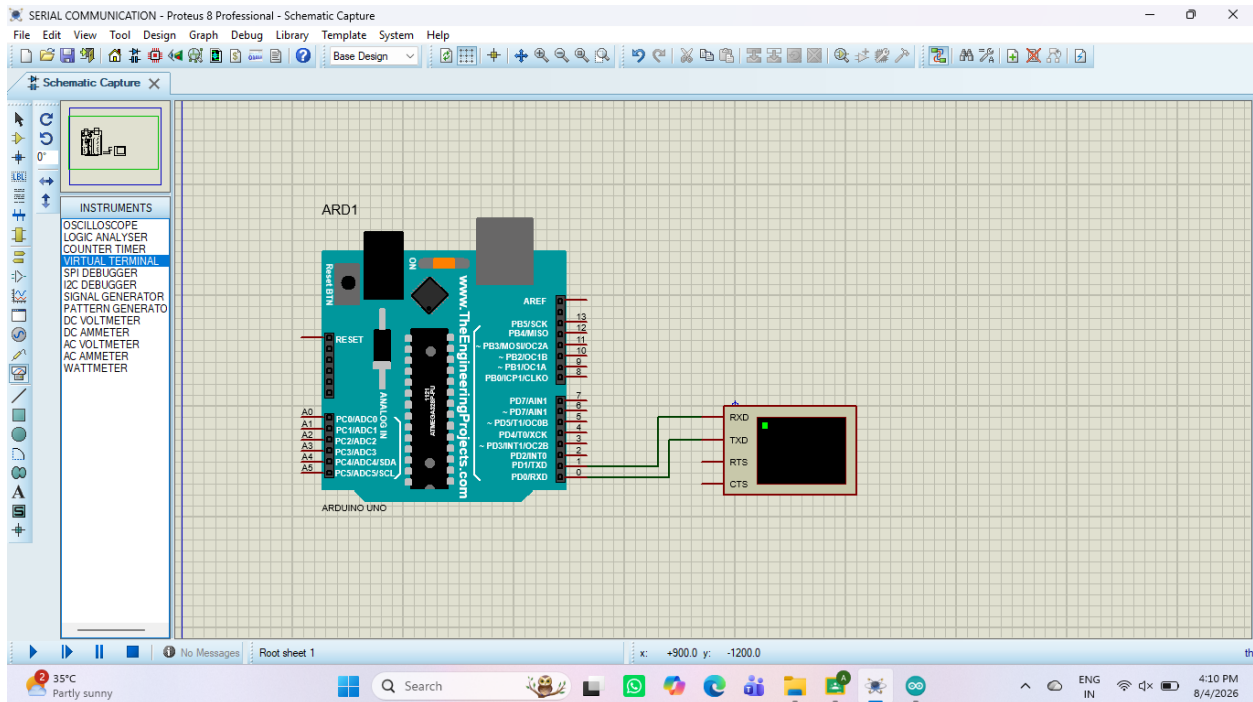

```
exp7 | Arduino 1.8.19
File Edit Sketch Tools Help

exp7

void setup()
{
  Serial.begin(9600); // send and receive at 9600 baud
}

int number = 0;

void loop()
{
  Serial.print("Number is ");
  Serial.println(number); // print the number
  delay(500); // delay half second between numbers
  number++; // to the next number
}

Done compiling.

Sketch uses 1902 bytes (5%) of program storage space. Maximum is 32256 bytes.
Global variables use 200 bytes (9%) of dynamic memory, leaving 1848 bytes for local variables. Maximum is 2048 bytes.

14 Arduino Uno
```

