# Random Access Memory for a Multi-Processor System on Chip

## QueenField



Figure 1: QueenField

**Table of Contents** 

## 0. INTRODUCTION

0.1. BEST PRACTICES

0.1.1. HARDWARE

0.1.1.1. ASIC

0.1.1.2. FPGA

0.1.2. SOFTWARE

0.1.2.1. MSP430

- 0.1.2.1.1. MSP430 Tests
- 0.1.2.1.2. MSP430 Bare Metal
- **0.1.2.1.3.** MSP430 Operating System 0.1.2.1.3.1. GNU Linux
- 0.1.2.1.3.2. GNU Hurd
- **0.1.2.1.4. MSP430 Distribution** 0.1.2.1.4.1. GNU Debian
- 0.1.2.1.4.2. GNU Fedora
- 0.1.2.2. OpenRISC
- 0.1.2.2.1. OpenRISC Tests
- 0.1.2.2.2. OpenRISC Bare Metal
- **0.1.2.2.3.** OpenRISC Operating System 0.1.2.2.3.1. GNU Linux
- 0.1.2.2.3.2. GNU Hurd
- **0.1.2.2.4.** OpenRISC Distribution 0.1.2.2.4.1. GNU Debian
- 0.1.2.2.4.2. GNU Fedora
- 0.1.2.3. RISC-V
- 0.1.2.3.1. RISC-V Tests
- 0.1.2.3.2. RISC-V Bare Metal
- **0.1.2.3.3. RISC-V Operating System** 0.1.2.3.3.1. GNU Linux
- 0.1.2.3.3.2. GNU Hurd
- **0.1.2.3.4. RISC-V Distribution** 0.1.2.3.4.1. GNU Debian
- 0.1.2.3.4.2. GNU Fedora

## 0.2. OPEN SOURCE PHILOSOPHY

- 0.2.1. Open Source Hardware
- 0.2.1.1. MSP430 Processing Unit
- 0.2.1.2. OpenRISC Processing Unit
- 0.2.1.3. RISC-V Processing Unit
- 0.2.2. Open Source Software
- 0.2.2.1. MSP430 GNU Compiler Collection
- 0.2.2.2. OpenRISC GNU Compiler Collection

## 0.2.2.3. RISC-V GNU Compiler Collection

## 0.3. INSTRUCTION SET ARCHITECTURE

- 0.3.1. RISC-V ISA
- 0.3.1.1. ISA Bases
- 0.3.1.1.1. RISC-V 32
- 0.3.1.1.2. RISC-V 64
- 0.3.1.1.3. RISC-V 128
- 0.3.1.2. ISA Extensions
- 0.3.1.2.1. Base Integer Instruction Set
- 0.3.1.2.2. Standard Extension for Integer Multiply and Divide
- 0.3.1.2.3. Standard Extension for Atomic Instructions
- 0.3.1.2.4. Standard Extension for Single-Precision Floating-Point
- 0.3.1.2.5. Standard Extension for Double-Precision Floating-Point
- 0.3.1.3. ISA Modes
- 0.3.1.3.1. RISC-V User
- 0.3.1.3.2. RISC-V Supervisor
- 0.3.1.3.3. RISC-V Hypervisor
- 0.3.1.3.4. RISC-V Machine
- 0.3.2. OpenRISC ISA
- 0.3.2.1. ISA Bases
- 0.3.2.2.1. OpenRISC 32
- 0.3.2.2.2. OpenRISC 64
- 0.3.2.2.3. OpenRISC 128
- 0.3.2.2. ISA Extensions
- 0.3.2.3. ISA Modes
- 0.3.2.3.1. OpenRISC User

- 0.3.2.3.2. OpenRISC Supervisor
- 0.3.2.3.3. OpenRISC Hypervisor
- 0.3.2.3.4. OpenRISC Machine
- 0.3.3. MSP430 ISA
- 0.3.3.1. ISA Bases
- 0.3.3.2.1. MSP430 32
- 0.3.3.2.2. MSP430 64
- 0.3.3.2.3. MSP430 128
- 0.3.3.2. ISA Extensions
- 0.3.3.3. ISA Modes
- 0.3.3.3.1. MSP430 User
- 0.3.3.3.2. MSP430 Supervisor
- 0.3.3.3.3. MSP430 Hypervisor
- 0.3.3.3.4. MSP430 Machine

## 1. METHODOLOGY

- 1.1. Requirements
- 1.1.1. Structural UML diagrams
- 1.1.1.1. Class diagram
- 1.1.1.2. Component diagram
- 1.1.1.3. Composite diagram
- 1.1.1.4. Deployment diagram
- 1.1.1.5. Object diagram
- 1.1.1.6. Package diagram
- 1.1.1.7. Profile diagram
- 1.1.2. Behavioral UML diagrams
- 1.1.2.1. Activity diagram

- 1.1.2.2. Communication diagram
- 1.1.2.3. Interaction diagram
- 1.1.2.4. Sequence diagram
- 1.1.2.5. State diagram
- 1.1.2.6. Timing diagram
- 1.1.2.7. Use diagram
- 1.2. Softmware
- 1.2.1. Matlab Language
- 1.2.2. Rust Language
- 1.3. Source
- 1.3.1. Ada Language
- 1.3.2. C Language
- 1.4. Model
- 1.4.1. VHDL
- 1.4.2. Verilog
- 1.6. Validation
- 1.6.1. VHDL
- 1.6.2. Verilog
- 1.6. Design
- 1.6.1. VHDL
- 1.6.2. Verilog
- 1.7. Verification
- 1.7.1. OSVVM-VHDL
- 1.7.1.1. OSVVM Checker
- 1.7.1.2. OSVVM Stimulus
- 1.7.1.3. OSVVM Testbench
- 1.7.2. UVM-Verilog
- 1.7.2.1. UVM Agent
- 1.7.2.2. UVM Driver
- 1.7.2.3. UVM Environment

- 1.7.2.4. UVM Monitor
- 1.7.2.5. UVM Scoreboard
- 1.7.2.6. UVM Sequence
- 1.7.2.7. UVM Sequencer
- 1.7.2.8. UVM Subscriber
- 1.7.2.9. UVM Test
- 1.7.2.10. UVM Testbench
- 1.7.2.11. UVM Transaction

## 2. PROJECTS

- 2.1. Random Access Memory for a Processing Unit
- 2.1.1. Functionality
- **2.1.1.1.** Structure
- **2.1.1.2.** Behavior
- 2.1.2. Interface
- **2.1.2.1.** Constants
- 2.1.2.2. Signals
- 2.1.3. Registers
- 2.1.4. Interruptions
- 2.2. Random Access Memory for a System on Chip
- 2.2.1. Functionality
- **2.2.1.1.** Structure
- **2.2.1.2.** Behavior
- 2.2.2. Interface
- **2.2.2.1.** Constants
- **2.2.2.2.** Signals

- 2.2.3. Registers
- 2.2.4. Interruptions
- 2.3. Random Access Memory for a Multi-Processor System on Chip
- 2.3.1. Functionality
- **2.3.1.1.** Structure
- **2.3.1.2.** Behavior
- 2.3.2. Interface
- **2.3.2.1.** Constants
- **2.3.2.2.** Signals
- 2.3.3. Registers
- 2.3.4. Interruptions

## 3. ORGANIZATION

- 3.1. Mechanics
- 3.2. Information
- 3.2.1. Bit
- 3.2.2. Logic Gate
- 3.2.2.1. YES/NOT Gate
- 3.2.2.2. AND/NAND Gate
- 3.2.2.3. OR/NOR Gate
- 3.2.2.4. XOR/XNOR Gate
- 3.2.3. Combinational Logic
- 3.2.3.1. Arithmetic Circuits
- 3.2.3.2. Logic Circuits

- 3.2.4. Finite State Machine
- 3.2.5. Pushdown Automaton
- 3.3. Neural Network
- 3.3.1. Feedforward Neural Network
- 3.3.2. Long Short Term Memory Neural Network
- 3.3.3. Transformer Neural Network
- 3.4. Turing Machine
- 3.4.1. Neural Turing Machine
- 3.4.1.1. Feedforward Neural Turing Machine
- 3.4.1.2. LSTM Neural Turing Machine
- 3.4.1.3. Transformer Neural Turing Machine
- 3.4.2. Differentiable Neural Computer
- 3.4.2.1. Feedforward Differentiable Neural Computer
- 3.4.2.2. LSTM Differentiable Neural Computer
- 3.4.2.3. Transformer Differentiable Neural Computer
- 3.5. Computer Architecture
- 3.5.1. von Neumann Architecture
- 3.5.1.1. Control Unit
- 3.5.1.2. ALU
- 3.5.1.3. Memory Unit
- 3.5.1.4. I/O Unit
- 3.5.2. Harvard Architecture
- 3.5.2.1. Control Unit
- 3.5.2.2. ALU
- 3.5.2.3. Memory Unit
- 3.5.2.4.I/O Unit
- 3.6. Advanced Computer Architecture
- 3.6.1. Processing Unit
- 3.6.1.1. SISD

- 3.6.1.2. SIMD
- 3.6.1.3. MISD
- 3.6.1.4. MIMD
- 3.6.2. System on Chip
- 3.6.2.1. Bus on Chip
- 3.6.2.2. Network on Chip
- 3.6.3. Multi-Processor System on Chip

## 4. HARDWARE WORKFLOW

## 4.1. FRONT-END OPEN SOURCE TOOLS

- 4.1.1. Modeling System Level of Hardware
- 4.1.2. Simulating System Level of Hardware
- 4.1.3. Verifying System Level of Hardware
- 4.1.4. Describing Register Transfer Level of Hardware
- 4.1.5. Simulating Register Transfer Level of Hardware
- 4.1.6. Synthesizing Register Transfer Level of Hardware
- 4.1.7. Optimizing Register Transfer Level of Hardware
- 4.1.8. Verifying Register Transfer Level of Hardware

## 4.2. BACK-END OPEN SOURCE TOOLS

- 4.2.1. Planning Switch Level of Hardware
- 4.2.2. Placing Switch Level of Hardware
- 4.2.3. Timing Switch Level of Hardware
- 4.2.4. Routing Switch Level of Hardware
- 4.2.5. Simulating Switch Level of Hardware
- 4.2.6. Verifying Switch Level of Hardware LVS
- 4.2.7. Checking Switch Level of Hardware DRC
- 4.2.8. Printing Switch Level of Hardware GDS

## 5. SOFTWARE WORKFLOW

#### 5.1. BACK-END OPEN SOURCE TOOLS

- 5.1.1. MSP430
- 5.1.1.1. MSP430 GNU C/C++
- 5.1.1.2. MSP430 GNU Go

- 5.1.2. OpenRISC
- 5.1.2.1. OpenRISC GNU C/C++
- 5.1.2.2. OpenRISC GNU Go
- 5.1.3. RISC-V
- 5.1.3.1. RISC-V GNU C/C++
- 5.1.3.2. RISC-V GNU Go
- 5.2. FRONT-END OPEN SOURCE TOOLS
- 5.2.1. MSP430
- 5.2.2. OpenRISC
- 5.2.3. RISC-V
- 5.2.3.1. Hardware Engineers Compiler: Spike
- 5.2.3.2. Software Engineers Compiler: QEMU

## 6. QUALITY ASSURANCE

- 6.1. SCOPE
- 6.2. NORMATIVE REFERENCE
- 6.3. TERMS AND DEFINITIONS
- 6.4. CONTEXT OF THE ORGANIZATION
- 6.4.1. Understanding the organization and itsontext
- 6.4.2. Understanding the needs and expectations of interested parties
- 6.4.3. Determining the scope of the quality management system
- 6.4.4. Quality management system and its processes
- 6.5. LEADERSHIP
- 6.5.1. Leadership and commitment
- **6.5.1.1.** General
- 6.5.1.2. Customer focus
- **6.5.2.** Policy
- 6.5.2.1. Establishing the quality policy
- 6.5.2.2. Communicating the quality policy

- 6.5.3. Organizational roles, responsibilities and authorities
- 6.6. PLANNING
- 6.6.1. Actions to address risks and opportunities
- 6.6.2. Quality objectives and planning to achieve them
- 6.6.3. Planning of changes
- 6.7. SUPPORT
- 6.7.1. Resources
- 6.7.1.1. General
- 6.7.1.2. People
- 6.7.1.3. Infrastructure
- 6.7.1.4. Environment for the operation of process
- 6.7.1.5. Monitoring and measuring resources
- 6.7.1.5.1. General
- 6.7.1.5.2. Measurement traceability
- 6.7.1.6. Organizational knowledge
- 6.7.2. Competence
- 6.7.3. Awareness
- 6.7.4. Communication
- 6.7.5. Documented information
- 6.7.5.1. General
- 6.7.5.2. Creating and updating
- 6.7.5.3. Control of documented information

## 6.8. OPERATION

- 6.8.1. Operational planning and control
- 6.8.2. Requirements for products and services
- 6.8.2.1. Customer communication
- 6.8.2.2. Determining the requirements for products and services
- 6.8.2.3. Review of the requirements for products and services
- 6.8.2.4. Changes to requirements for products and services

- 6.8.3. Design and development of products and services
- 6.8.3.1. General
- 6.8.3.2. Design and development planning
- 6.8.3.3. Design and development inputs
- 6.8.3.4. Design and development controls
- 6.8.3.5. Design and development outputs
- 6.8.4. Control of externally provided processes, products and services
- 6.8.4.1. General
- 6.8.4.2. Type and extent of control
- 6.8.4.3. Information for external providers
- 6.8.5. Production and service provision
- 6.8.5.1. Control of production and service provision
- 6.8.5.2. Identification and traceability
- 6.8.5.3. Property belonging to customers or external providers
- 6.8.5.4. Preservation
- 6.8.5.5. Post-delivery activities
- 6.8.5.6. Control of changes
- 6.8.6. Release of products and services
- 6.8.7. Control of nonconforming outputs
- 6.9. PERFORMANCE EVALUATION
- 6.9.1. Monitoring, measurement, analysis and evaluation
- 6.9.1.1. General
- 6.9.1.2. Customer satisfaction
- 6.9.1.3. Analysis and evaluation
- 6.9.2. Internal audit
- 6.9.3. Management review
- 6.9.3.1. General
- 6.9.3.2. Management review inputs

#### 6.9.3.3. Management review outputs

#### 6.10. IMPROVEMENT

- 6.10.1. General
- 6.10.2. Nonconformity and corrective action
- 6.10.3. Continual improvement

## 7. CERTIFICATION

#### 7.1. PLANNING PROCESS

- 7.1.1. Planning Process Objectives
- 7.1.2. Planning Process Activities

#### 7.2. HARDWARE DESIGN PROCESS

- 7.2.1. Requirements Capture Process
- 7.2.2. Conceptual Design Process
- 7.2.3. Detailed Design Process
- 7.2.4. Implementation Process
- 7.2.5. Production Transition
- 7.2.6. Acceptance Test
- 7.2.7. Series Production

## 7.3. VALIDATION AND VERIFICATION PROCESS

- 7.3.1. Validation Process
- 7.3.2. Verification Process
- 7.3.3. Validation and Verification Methods

#### 7.4. CONFIGURATION MANAGEMENT PROCESS

- 7.4.1. Configuration Management Objectives
- 7.4.2. Configuration Management Activities
- 7.4.3. Data Control Categories

## 7.5. PROCESS ASSURANCE

- 7.5.1. Process Assurance Objectives
- 7.5.2. Process Assurance Activities

#### 7.6. CERTIFICATION LIAISON PROCESS

- 7.6.1. Means of Compliance and Planning
- 7.6.2. Compliance Substantiation

## 7.7. HARDWARE DESIGN LIFECYCLE DATA

- 7.7.1. Hardware Plans
- 7.7.1.1. Plan for Hardware Aspects of Certification

7.7.1.3. Hardware Validation Plan
7.7.1.4. Hardware Verification Plan
7.7.1.5. Hardware Configuration Management Plan
7.7.1.6. Hardware Process Assurance Plan
7.7.2. Hardware Design Standards and Guidance
7.7.2.1. Requirements Standards
7.7.2.2. Hardware Design Standards
7.7.2.3. Validation and Verification Standards
7.7.2.4. Hardware Archive Standards
7.7.3. Hardware Design Data
7.7.3.1. Hardware Requirements
7.7.3.2. Hardware Design Representation Data
7.7.3.2.1. Conceptual Design Data
7.7.3.2.2. Detailed Design Data 7.7.3.2.2.1. Top-Level Drawing
7.7.3.2.2.2. Assembly Drawings
7.7.3.2.2.3. Installation Control Drawings
7.7.3.2.2.4. Hardware/Software Interface Data
7.7.4. Validation and Verification Data
7.7.4.1. Traceability Data
7.7.4.2. Review and Analysis Procedures
7.7.4.3. Review and Analysis Results

 $7.7.1.2.~{\rm Hardware~Design~Plan}$ 

7.7.4.4. Test Procedures

7.7.4.5. Test Results

## 7.8. ADDITIONAL CONSIDERATIONS

- 7.8.1. Use of Previously Developed Hardware
- 7.8.2. Commercial Components Usage
- 7.8.3. Product Service Experience
- 7.8.4. Tool Assessment and Qualification

## 0. INTRODUCTION

## 0.1. BEST PRACTICES

## 0.1.1. HARDWARE

cd synthesis/yosys
source SYNTHESIZE-IT

#### **0.1.1.1. ASIC** type:

cd synthesis/qflow
source FLOW-IT

#### **0.1.1.2. FPGA** type:

cd synthesis/symbiflow
source FLOW-IT

#### 0.1.2. SOFTWARE

0.1.2.1. MSP430

#### 0.1.2.1.1. MSP430 Tests

### 0.1.2.1.2. MSP430 Bare Metal

## **0.1.2.1.3.** MSP430 Operating System 0.1.2.1.3.1. GNU Linux

0.1.2.1.3.2. GNU Hurd

## $\textbf{0.1.2.1.4.} \hspace{0.2cm} \textbf{MSP430 Distribution} \hspace{0.2cm} 0.1.2.1.4.1. \hspace{0.2cm} \textbf{GNU Debian}$

0.1.2.1.4.2. GNU Fedora

## 0.1.2.2. OpenRISC

## 0.1.2.2.1. OpenRISC Tests

## 0.1.2.2.2. OpenRISC Bare Metal

## **0.1.2.2.3.** OpenRISC Operating System 0.1.2.2.3.1. GNU Linux

0.1.2.2.3.2. GNU Hurd

## **0.1.2.2.4.** OpenRISC Distribution 0.1.2.2.4.1. GNU Debian

0.1.2.2.4.2. GNU Fedora

#### 0.1.2.3. RISC-V

```
0.1.2.3.1. RISC-V Tests type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
rm -rf tests
rm -rf riscv-tests
mkdir tests
mkdir tests/dump
mkdir tests/hex
git clone --recursive https://github.com/riscv/riscv-tests
cd riscv-tests
autoconf
./configure --prefix=/opt/riscv-elf-gcc/bin
cd isa
source ../../elf2hex.sh
mv *.dump ../../tests/dump
mv *.hex ../../tests/hex
cd ..
make clean
elf2hex.sh:
riscv64-unknown-elf-objcopy -0 ihex rv32mi-p-breakpoint rv32mi-p-breakpoint.hex
riscv64-unknown-elf-objcopy -0 ihex rv32mi-p-csr rv32mi-p-csr.hex
riscv64-unknown-elf-objcopy -0 ihex rv64um-v-remw rv64um-v-remw.hex
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
spike rv32mi-p-breakpoint
spike rv32mi-p-csr
spike rv64um-v-remw
0.1.2.3.2. RISC-V Bare Metal type:
rm -rf hello_c.elf
rm -rf hello_c.hex
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
riscv64-unknown-elf-gcc -o hello_c.elf hello_c.c
riscv64-unknown-elf-objcopy -O ihex hello_c.elf hello_c.hex
```

```
C Language:
#include <stdio.h>
int main() {
  printf("Hello QueenField!\n");
  return 0;
}
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
spike pk hello_c.elf
type:
rm -rf hello_cpp.elf
rm -rf hello_cpp.hex
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
riscv64-unknown-elf-g++ -o hello_cpp.elf hello_cpp.cpp
riscv64-unknown-elf-objcopy -O ihex hello_cpp.elf hello_cpp.hex
C++ Language:
#include <iostream>
int main() {
  std::cout << "Hello QueenField!\n";</pre>
  return 0;
}
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
spike pk hello_cpp.elf
type:
rm -rf hello_go.elf
rm -rf hello_go.hex
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
export PATH=/opt/riscv-go/bin:${PATH}
GOOS=linux GOARCH=riscv64 go build -o hello_go.elf hello_go.go
riscv64-unknown-elf-objcopy -O ihex hello_go.elf hello_go.hex
Go Language:
package main
import "fmt"
func main() {
  fmt.Println("Hello QueenField!")
```

```
Building BusyBox
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://git.busybox.net/busybox
cd busybox
make CROSS COMPILE=riscv64-unknown-linux-gnu- defconfig
make CROSS_COMPILE=riscv64-unknown-linux-gnu-
Building Linux
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/torvalds/linux
cd linux
make ARCH=riscv CROSS_COMPILE=riscv64-unknown-linux-gnu- defconfig
make ARCH=riscv CROSS_COMPILE=riscv64-unknown-linux-gnu-
Running Linux
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
qemu-system-riscv64 -nographic -machine virt \
-kernel Image -append "root=/dev/vda ro console=ttyS0" \
-drive file=busybox,format=raw,id=hd0 \
-device virtio-blk-device, drive=hd0
Running Linux RISC-V 32 bit with Buildroot
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/buildroot/buildroot
cd buildroot
make qemu_riscv32_virt_defconfig
qemu-system-riscv32 \
-M virt \
-nographic \
-bios output/images/fw_jump.elf \
-kernel output/images/Image \
-append "root=/dev/vda ro" \
-drive file=output/images/rootfs.ext2,format=raw,id=hd0 \
-device virtio-blk-device, drive=hd0 \
-netdev user,id=net0 \
-device virtio-net-device, netdev=net0
```

**0.1.2.3.3.** RISC-V Operating System 0.1.2.3.3.1. GNU Linux

## Running Linux RISC-V 64 bit with Buildroot

```
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/buildroot/buildroot
cd buildroot
make qemu_riscv64_virt_defconfig
qemu-system-riscv64 \
-M virt \
-nographic \
-bios output/images/fw_jump.elf \
-kernel output/images/Image \
-append "root=/dev/vda ro" \
-drive file=output/images/rootfs.ext2,format=raw,id=hd0 \
-device virtio-blk-device,drive=hd0 \
-netdev user,id=net0 \
-device virtio-net-device, netdev=net0
0.1.2.3.3.2. GNU Hurd
0.1.2.3.4. RISC-V Distribution 0.1.2.3.4.1. GNU Debian
0.1.2.3.4.2. GNU Fedora
Running Fedora
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
qemu-system-riscv64 \
-nographic \
-machine virt \
-smp 4 \
-m 2G \
-kernel Fedora-RISCV.elf \
-bios none \
-object rng-random,filename=/dev/urandom,id=rng0 \
-device virtio-rng-device,rng=rng0 \
-device virtio-blk-device,drive=hd0 \
-drive file=Fedora-RISCV.raw,format=raw,id=hd0 \
-device virtio-net-device,netdev=usernet \
-netdev user,id=usernet,hostfwd=tcp::10000-:22
```

#### 0.2. OPEN SOURCE PHILOSOPHY

#### For Windows Users!

- 1. Settings  $\rightarrow$  Apps  $\rightarrow$  Apps & features  $\rightarrow$  Related settings, Programs and Features  $\rightarrow$  Turn Windows features on or off  $\rightarrow$  Windows Subsystem for Linux
- 2. Microsoft Store  $\rightarrow$  INSTALL UBUNTU

type:

sudo apt update
sudo apt upgrade

0.2.1. Open Source Hardware

0.2.1.1. MSP430 Processing Unit

0.2.1.2. OpenRISC Processing Unit

0.2.1.3. RISC-V Processing Unit

0.2.2. Open Source Software

 $0.2.2.1.~\mathrm{MSP430}~\mathrm{GNU}~\mathrm{Compiler}~\mathrm{Collection}$ 

0.2.2.2. OpenRISC GNU Compiler Collection

0.2.2.3. RISC-V GNU Compiler Collection

## 0.3. INSTRUCTION SET ARCHITECTURE

0.3.1. RISC-V ISA

0.3.1.1. ISA Bases

0.3.1.1.1. RISC-V 32

0.3.1.1.2. RISC-V 64

0.3.1.1.3. RISC-V 128

0.3.1.2. ISA Extensions

0.3.1.2.1. Base Integer Instruction Set RV32I: Base Integer Instruction Set (32 bit)

RV32I	31:25	24:20	19:15	14:12	11:7	6:0
LUI RD, IMM	IIIIIII	IIIII	IIIII	III	RD4:0	0110111
AUPIC RD, IMM	IIIIIII	IIIII	IIIII	III	RD4:0	0010111
JAL RD, IMM	IIIIIII	IIIII	IIIII	III	RD4:0	1101111
JALR RD,RS1,IMM	IIIIIII	IIIII	RS14:0	000	RD4:0	1101111
BEQ RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	000	IIIII	1100011
BNE RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	001	IIIII	1100011
BLT RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	100	IIIII	1100011
BGE RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	101	IIIII	1100011
BLTU RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	110	IIIII	1100011
BGEU RS1,RS2,IMM	IIIIIII	RS24:0	RS14:0	111	IIIII	1100011
LB RD, RS1	IIIIIII	IIIII	RS14:0	000	RD4:0	0000011
LH RD, RS1	IIIIIII	IIIII	RS14:0	001	RD4:0	0000011
LW RD, RS1	IIIIIII	IIIII	RS14:0	010	RD4:0	0000011
LBU RD, RS1	IIIIIII	IIIII	RS14:0	100	RD4:0	0000011
LHU RD, RS1	IIIIIII	IIIII	RS14:0	101	RD4:0	0000011
SB RS2,RS1	IIIIIII	RS24:0	RS14:0	000	IIIII	0100011
SH RS2,RS1	IIIIIII	RS24:0	RS14:0	001	IIIII	0100011

RV32I	31:25	24:20	19:15	14:12	11:7	6:0
SW RS2,RS1	IIIIIII	RS24:0	RS14:0	010	IIIII	0100011
ADDI RD,RS1,IMM	IIIIIII	IIIII	RS14:0	000	RD4:0	0010011
SLTI RD,RS1,IMM	IIIIIII	IIIII	RS14:0	010	RD4:0	0010011
SLTIU RD,RS1,IMM	IIIIIII	IIIII	RS14:0	011	RD4:0	0010011
XORI RD,RS1,IMM	IIIIIII	IIIII	RS14:0	100	RD4:0	0010011
ORI RD,RS1,IMM	IIIIIII	IIIII	RS14:0	110	RD4:0	0010011
ANDI RD,RS1,IMM	IIIIIII	IIIII	RS14:0	111	RD4:0	0010011
SLLI RD,RS1,IMM	0000000	IIII	RS14:0	001	RD4:0	0010011
SRLI RD,RS1,IMM	0000000	IIII	RS14:0	101	RD4:0	0010011
SRAI RD,RS1,IMM	0100000	IIII	RS14:0	101	RD4:0	0010011
ADD RD,RS1,RS2	0000000	RS24:0	RS14:0	000	RD4:0	0110011
SUB RD,RS1,RS2	0100000	RS24:0	RS14:0	000	RD4:0	0110011
SLL RD,RS1,RS2	0000000	RS24:0	RS14:0	001	RD4:0	0110011
SLT RD,RS1,RS2	0000000	RS24:0	RS14:0	010	RD4:0	0110011
SLTU RD,RS1,RS2	0000000	RS24:0	RS14:0	011	RD4:0	0110011
XOR RD,RS1,RS2	0000000	RS24:0	RS14:0	100	RD4:0	0110011
SRL RD,RS1,RS2	0000000	RS24:0	RS14:0	101	RD4:0	0110011
SRA RD,RS1,RS2	0100000	RS24:0	RS14:0	101	RD4:0	0110011
OR RD,RS1,RS2	0000000	RS24:0	RS14:0	110	RD4:0	0110011
AND RD,RS1,RS2	0000000	RS24:0	RS14:0	111	RD4:0	0110011
FENCE PRED,SUCC	0000PPP	PSSSS	00000	000	00000	0001111
FENCE.I	0000P00	00000	00000	001	00000	0001111

RV64I : Base Integer Instruction Set (64 bit)

RV64I	31:25	24:20	19:15	14:12	11:7	6:0
LWU RD, RS1	IIIIIII	IIIII	RS14:0	110	RD4:0	0000011
LD RD, RS1	IIIIIII	IIIII	RS14:0	011	RD4:0	0000011
SD RD, RS1,RS2	IIIIIII	RS24:0	RS14:0	011	IIIII	0000011
SLLI RD, RS1,IMM	0000000	IIIII	RS14:0	001	RD4:0	0010011
SRLI RD, RS1,IMM	0000000	IIIII	RS14:0	001	RD4:0	0010011
SRAI RD, RS1,IMM	0100000	IIIII	RS14:0	001	RD4:0	0010011
ADDIW RD, RS1	IIIIIII	IIIII	RS14:0	000	RD4:0	0011011
SLLIW RD, RS1	0000000	IIIII	RS14:0	001	RD4:0	0011011
SRLIW RD, RS1	0000000	IIIII	RS14:0	101	RD4:0	0011011
SRAIW RD, RS1	0100000	IIIII	RS14:0	101	RD4:0	0011011
ADDW RD, RS1,RS2	0000000	RS24:0	RS14:0	000	RD4:0	0111011
SUBW RD, RS1,RS2	0100000	RS24:0	RS14:0	000	RD4:0	0111011
SLIW RD, RS1,RS2	0000000	RS24:0	RS14:0	001	RD4:0	0111011
SRLW RD, RS1,RS2	0000000	RS24:0	RS14:0	101	RD4:0	0111011
SRAW RD, RS1,RS2	0100000	RS24:0	RS14:0	101	RD4:0	0111011

0.3.1.2.2. Standard Extension for Integer Multiply and Divide RV32M : Standard Extension for Integer Multiply and Divide (32 bit)

RV32M	31:25	24:20	19:15	14:12	11:7	6:0
MUL RD,RS1,RS2	0000001	RS24:0	RS14:0	000	RD4:0	0110011
MULH RD,RS1,RS2	0000001	RS24:0	RS14:0	001	RD4:0	0110011
MULHSU RD,RS1,RS2	0000001	RS24:0	RS14:0	010	RD4:0	0110011

RV32M	31:25	24:20	19:15	14:12	11:7	6:0
MULHU RD,RS1,RS2	0000001	RS24:0	RS14:0	011	RD4:0	0110011
DIV RD,RS1,RS2	0000001	RS24:0	RS14:0	100	RD4:0	0110011
DIVU RD,RS1,RS2	0000001	RS24:0	RS14:0	101	RD4:0	0110011
REM RD,RS1,RS2	0000001	RS24:0	RS14:0	110	RD4:0	0110011
REMU RD,RS1,RS2	0000001	RS24:0	RS14:0	111	RD4:0	0110011

## Standard Extension for Integer Multiply and Divide (64 bit)

RV64M	31:25	24:20	19:15	14:12	11:7	6:0
MULW RD,RS1,RS2	0000001	RS24:0	RS14:0	000	RD4:0	0111011
DIVW RD,RS1,RS2	0000001	RS24:0	RS14:0	100	RD4:0	0111011
DIVUW RD,RS1,RS2	0000001	RS24:0	RS14:0	101	RD4:0	0111011
REMW RD,RS1,RS2	0000001	RS24:0	RS14:0	110	RD4:0	0111011
REMUW RD,RS1,RS2	0000001	RS24:0	RS14:0	111	RD4:0	0111011

0.3.1.2.3. Standard Extension for Atomic Instructions RV32A : Standard Extension for Atomic Instructions (32 bit)

RV32A	31:25	24:20	19:15	14:12	11:7	6:0
LR.W AQRL,RD,RS1	00010AQRL	00000	RS14:0	010	RD4:0	0101111
SC.W AQRL,RD,RS2,RS1	00011AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOSWAP.W AQRL,RD,RS2,RS1	00001AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOSADD.W AQRL,RD,RS2,RS1	00000AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOSXOR.W AQRL,RD,RS2,RS1	00100 AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOOR.W AQRL,RD,RS2,RS1	01000 AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOAMD.W AQRL,RD,RS2,RS1	01100 AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOMIN.W AQRL,RD,RS2,RS1	10000AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOMAX.W AQRL,RD,RS2,RS1	10100 AQRL	RS24:0	RS14:0	010	RD4:0	0101111
AMOMINU.W AQRL,RD,RS2,RS1	11000 AQRL	RS24:0	RS14:0	010	RD4:0	0101111
$AMOMAXU.W\ AQRL,RD,RS2,RS1$	$11100 \mathrm{AQRL}$	RS24:0	RS14:0	010	RD4:0	0101111

RV64A: Standard Extension for Atomic Instructions (64 bit)

RV64A	31:25	24:20	19:15	14:12	11:7	6:0
LR.D AQRL,RD,RS1	00010AQRL	00000	RS14:0	011	RD4:0	0101111
SC.D AQRL,RD,RS2,RS1	00011AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOSWAP.D AQRL,RD,RS2,RS1	00001AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOSADD.D AQRL,RD,RS2,RS1	00000AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOSXOR.D AQRL,RD,RS2,RS1	00100 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOOR.D AQRL,RD,RS2,RS1	01000 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOAMD.D AQRL,RD,RS2,RS1	01100 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOMIN.D AQRL,RD,RS2,RS1	10000 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOMAX.D AQRL,RD,RS2,RS1	10100 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOMINU.D AQRL,RD,RS2,RS1	11000 AQRL	RS24:0	RS14:0	011	RD4:0	0101111
AMOMAXU.D AQRL,RD,RS2,RS1	11100AQRL	RS24:0	RS14:0	011	RD4:0	0101111

 $0.3.1.2.4. \ Standard \ Extension \ for \ Single-Precision \ Floating-Point \ RV32F: Standard \ Extension \ for \ Single-Precision \ Floating-Point \ (32 \ bit)$ 

RV32F	31:25	24:20	19:15	14:12	11:7	6:0
FLW FRD,RS1	IIIIIII	IIIII	FRS1	010	FRD	0000111
FSW FRS2,RS1	IIIIIII	FRS2	FRS1	010	IIIII	0100111
FMADD.S RM,FRD,FRS1,FRS2,FRS3	FRS3_00	FRS2	FRS1	RM	FRD	1000011
FMSUB.S RM,FRD,FRS1,FRS2,FRS3	$FRS3\_00$	FRS2	FRS1	RM	FRD	1000111
FNMSUB.S RM,FRD,FRS1,FRS2,FRS3	$FRS3\_00$	FRS2	FRS1	RM	FRD	1001011
FNMADD.S RM,FRD,FRS1,FRS2,FRS3	$FRS3\_00$	FRS2	FRS1	RM	FRD	1001111
FADD.S RM,FRD,FRS1,FRS2,FRS3	0000000	FRS2	FRS1	RM	FRD	1010011
FSUB.S RM,FRD,FRS1,FRS2,FRS3	0000100	FRS2	FRS1	RM	FRD	1010011
FMUL.S RM,FRD,FRS1,FRS2,FRS3	0001000	FRS2	FRS1	RM	FRD	1010011
FDIV.S RM,FRD,FRS1,FRS2,FRS3	0001100	FRS2	FRS1	RM	FRD	1010011
FSGNJ.S FRD,FRS1,FRS2	0010000	FRS2	FRS1	000	FRD	1010011
FSGNJN.S FRD,FRS1,FRS2	0010000	FRS2	FRS1	001	FRD	1010011
FSGNJX.S FRD,FRS1,FRS2	0010000	FRS2	FRS1	010	FRD	1010011
FMIN.S FRD,FRS1,FRS2	0010100	FRS2	FRS1	000	FRD	1010011
FMAX.S FRD,FRS1,FRS2	0010100	FRS2	FRS1	001	FRD	1010011
FSQRT.S FRD,FRS1,FRS2	0101100	00000	FRS1	RM	FRD	1010011
FLE.S FRD,FRS1,FRS2	1010000	FRS2	FRS1	000	FRD	1010011
FLT.S FRD,FRS1,FRS2	1010000	FRS2	FRS1	001	FRD	1010011
FEQ.S FRD,FRS1,FRS2	1010000	FRS2	FRS1	010	FRD	1010011
FCVT.W.S RM,RD,FRS1	1100000	00000	FRS1	RM	FRD	1010011
FCVT.WU.S RM,RD,FRS1	1100000	00010	FRS1	RM	FRD	1010011
FCVT.S.W RM,RD,FRS1	1101000	00000	FRS1	RM	FRD	1010011
FCVT.S.WU RM,RD,FRS1	1101000	00010	FRS1	RM	FRD	1010011
FMV.X.S RD,FRS1	1110000	00000	FRS1	000	RD	1010011
FCLASS.S RD,FRS1	1110000	00000	FRS1	001	RD	1010011
FMV.S.X RD,FRS1	1111000	00000	RS1	000	FRD	1010011

RV64F: Standard Extension for Single-Precision Floating-Point (64 bit)

RV64F	31:25	24:20	19:15	14:12	11:7	6:0
FCVT.L.S RM,RD,FRS1	1100000	00010	FRS1	RM	FRD	1010011
FCVT.LU.S RM,RD,FRS1	1100000	00011	FRS1	RM	FRD	1010011
FCVT.S.L RM,RD,FRS1	1101000	00010	FRS1	RM	FRD	1010011
FCVT.S.LU RM,RD,FRS1	1101000	00011	FRS1	RM	FRD	1010011

 $0.3.1.2.5.\ Standard\ Extension\ for\ Double-Precision\ Floating-Point\quad RV32D: Standard\ Extension\ for\ Double-Precision\ Floating-Point\ (32\ bit)$ 

RV32F	31:25	24:20	19:15	14:12	11:7	6:0
FLW FRD,RS1	IIIIIII	IIIII	FRS1	011	FRD	0000111
FSW FRS2,RS1	IIIIIII	FRS2	FRS1	011	IIIII	0100111
FMADD.D RM,FRD,FRS1,FRS2,FRS3	$FRS3\_01$	FRS2	FRS1	RM	FRD	1000011
FMSUB.D RM,FRD,FRS1,FRS2,FRS3	$FRS3\_01$	FRS2	FRS1	RM	FRD	1000111
FNMSUB.D RM,FRD,FRS1,FRS2,FRS3	$FRS3\_01$	FRS2	FRS1	RM	FRD	1001011
FNMADD.D RM,FRD,FRS1,FRS2,FRS3	$FRS3\_01$	FRS2	FRS1	RM	FRD	1001111
FADD.D RM,FRD,FRS1,FRS2,FRS3	0000001	FRS2	FRS1	RM	FRD	1010011

RV32F	31:25	24:20	19:15	14:12	11:7	6:0
FSUB.D RM,FRD,FRS1,FRS2,FRS3	0000101	FRS2	FRS1	RM	FRD	1010011
FMUL.D RM,FRD,FRS1,FRS2,FRS3	0001001	FRS2	FRS1	RM	FRD	1010011
FDIV.D RM,FRD,FRS1,FRS2,FRS3	0001101	FRS2	FRS1	RM	FRD	1010011
FSGNJ.D FRD,FRS1,FRS2	0010001	FRS2	FRS1	000	FRD	1010011
FSGNJN.D FRD,FRS1,FRS2	0010001	FRS2	FRS1	001	FRD	1010011
FSGNJX.D FRD,FRS1,FRS2	0010001	FRS2	FRS1	010	FRD	1010011
FMIN.D FRD,FRS1,FRS2	0010101	FRS2	FRS1	000	FRD	1010011
FMAX.D FRD,FRS1,FRS2	0010101	FRS2	FRS1	001	FRD	1010011
FSQRT.D FRD,FRS1,FRS2	0101101	00000	FRS1	RM	FRD	1010011
FLE.D FRD,FRS1,FRS2	1010001	FRS2	FRS1	000	FRD	1010011
FLT.D FRD,FRS1,FRS2	1010001	FRS2	FRS1	001	FRD	1010011
FEQ.D FRD,FRS1,FRS2	1010001	FRS2	FRS1	010	FRD	1010011
FCVT.W.D RM,RD,FRS1	1100001	00000	FRS1	RM	FRD	1010011
FCVT.WU.D RM,RD,FRS1	1100001	00010	FRS1	RM	FRD	1010011
FCVT.D.W RM,RD,FRS1	1101001	00000	FRS1	RM	FRD	1010011
FCVT.D.WU RM,RD,FRS1	1101001	00010	FRS1	RM	FRD	1010011
FCLASS.D RD,FRS1	1110001	00000	FRS1	001	RD	1010011

RV64D : Standard Extension for Double-Precision Floating-Point (64 bit)

RV64D	31:25	24:20	19:15	14:12	11:7	6:0
FCVT.L.D RM,RD,FRS1	1100001	00010	FRS1	RM	FRD	1010011
FCVT.LU.D RM,RD,FRS1	1100001	00011	FRS1	RM	FRD	1010011
FCVT.D.L RM,RD,FRS1	1101001	00010	FRS1	RM	FRD	1010011
FCVT.D.LU RM,RD,FRS1	1101001	00011	FRS1	RM	FRD	1010011
FMV.X.D RD,FRS1	1110001	00000	FRS1	000	RD	1010011
FMV.D.X RD,FRS1	1111001	00000	RS1	000	FRD	1010011

## 0.3.1.3. ISA Modes

0.3.1.3.1. RISC-V User

0.3.1.3.2. RISC-V Supervisor

 ${\bf 0.3.1.3.3.} \ \, {\bf RISC\text{-}V} \ \, {\bf Hypervisor}$ 

0.3.1.3.4. RISC-V Machine

0.3.2. OpenRISC ISA

**0.3.2.1. ISA Bases** 

0.3.2.2.1. OpenRISC 32

0.3.2.2.2. OpenRISC 64

0.3.2.2.3. OpenRISC 128

0.3.2.2. ISA Extensions

- **0.3.2.3. ISA** Modes
- 0.3.2.3.1. OpenRISC User
- 0.3.2.3.2. OpenRISC Supervisor
- 0.3.2.3.3. OpenRISC Hypervisor
- 0.3.2.3.4. OpenRISC Machine
- 0.3.3. MSP430 ISA
- 0.3.3.1. ISA Bases
- 0.3.3.2.1. MSP430 32
- 0.3.3.2.2. MSP430 64
- 0.3.3.2.3. MSP430 128
- 0.3.3.2. ISA Extensions
- 0.3.3.3. ISA Modes
- 0.3.3.3.1. MSP430 User
- 0.3.3.3.2. MSP430 Supervisor
- 0.3.3.3.3. MSP430 Hypervisor
- 0.3.3.3.4. MSP430 Machine

## 1. METHODOLOGY



Figure 2: Project Workflow

- 1.1. Requirements
- 1.1.1. Structural UML diagrams
- 1.1.1.1. Class diagram
- 1.1.1.2. Component diagram
- 1.1.1.3. Composite diagram
- 1.1.1.4. Deployment diagram

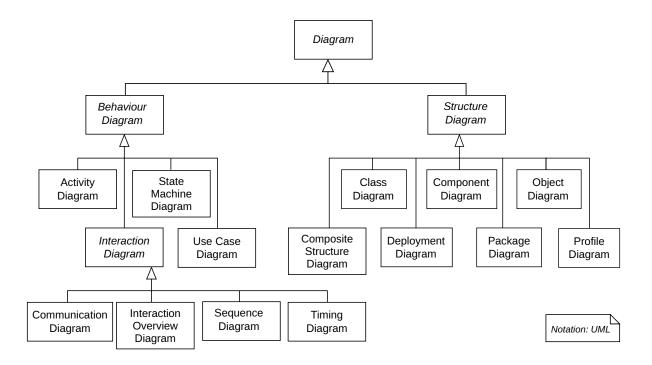


Figure 3: UML Diagrams Overview

- 1.1.1.5. Object diagram
- 1.1.1.6. Package diagram
- 1.1.1.7. Profile diagram
- 1.1.2. Behavioral UML diagrams
- 1.1.2.1. Activity diagram
- 1.1.2.2. Communication diagram
- 1.1.2.3. Interaction diagram
- 1.1.2.4. Sequence diagram
- 1.1.2.5. State diagram
- 1.1.2.6. Timing diagram
- 1.1.2.7. Use diagram

- 1.2. Softmware
- 1.2.1. Matlab Language
- 1.2.2. Rust Language
- 1.3. Source
- 1.3.1. Ada Language
- 1.3.2. C Language
- 1.4. Model
- 1.4.1. VHDL
- 1.4.2. Verilog
- 1.6. Validation
- 1.6.1. VHDL
- 1.6.2. Verilog
- 1.6. Design
- 1.6.1. VHDL
- 1.6.2. Verilog
- 1.7. Verification
- 1.7.1. OSVVM-VHDL
- 1.7.1.1. OSVVM Checker
- 1.7.1.2. OSVVM Stimulus
- 1.7.1.3. OSVVM Testbench
- 1.7.2. UVM-Verilog
- 1.7.2.1. UVM Agent
- 1.7.2.2. UVM Driver
- 1.7.2.3. UVM Environment
- 1.7.2.4. UVM Monitor
- 1.7.2.5. UVM Scoreboard
- 1.7.2.6. UVM Sequence
- 1.7.2.7. UVM Sequencer
- 1.7.2.8. UVM Subscriber
- 1.7.2.9. UVM Test

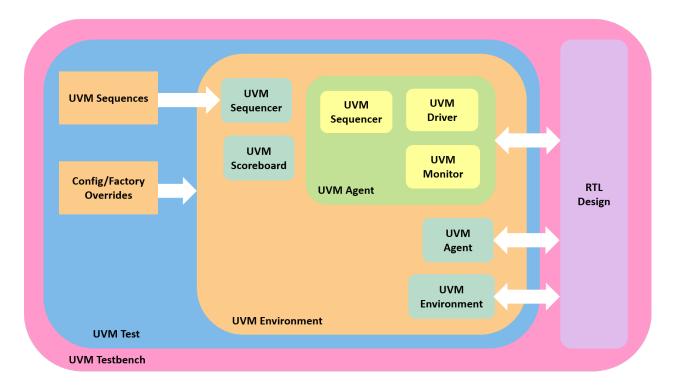


Figure 4: UVM Diagram Overview

## 1.7.2.10. UVM Testbench

#### 1.7.2.11. UVM Transaction

## 2. PROJECTS

A Random Access Memory (RAM) is a computer memory that can be read and changed in any order, typically used to store working data and machine code. A RAM device allows data items to be read or written in almost the same amount of time irrespective of the physical location of data inside the memory. RAM contains multiplexing and demultiplexing circuitry, to connect the data lines to the addressed storage for reading or writing the entry.

## 2.1. Random Access Memory for a Processing Unit

- 2.1.1. Functionality
- **2.1.1.1.** Structure
- **2.1.1.2.** Behavior
- 2.1.2. Interface
- **2.1.2.1.** Constants
- 2.1.2.2. Signals

- 2.1.3. Registers
- 2.1.4. Interruptions
- 2.2. Random Access Memory for a System on Chip
- 2.2.1. Functionality
- **2.2.1.1.** Structure

Core	Module description
mpsoc_axi4_spram	Multi-Port RAM for AMBA4 AXI-Lite

Core	Module description
mpsoc_ahb3_sprammpsoc_ram_1r1wmpsoc_ram_1r1w_generic	Multi-Port RAM for AMBA3 AHB-Lite RAM Wrapper RAM Generic Module

Core	Module description
mpsoc_wb_sprammpsoc_wb_ram_generic	Multi-Port RAM for WishBone RAM Generic Module

- **2.2.1.2.** Behavior
- 2.2.2. Interface
- **2.2.2.1.** Constants
- **2.2.2.2.** Signals
- 2.2.3. Registers
- 2.2.4. Interruptions
- 2.3. Random Access Memory for a Multi-Processor System on Chip
- 2.3.1. Functionality
- **2.3.1.1.** Structure
- **2.3.1.2.** Behavior
- 2.3.2. Interface
- **2.3.2.1.** Constants
- **2.3.2.2.** Signals

- 2.3.3. Registers
- 2.3.4. Interruptions

## 3. ORGANIZATION

- 3.1. Mechanics
- 3.2. Information
- 3.2.1. Bit
- 3.2.2. Logic Gate
- 3.2.2.1. YES/NOT Gate
- 3.2.2.2. AND/NAND Gate
- 3.2.2.3. OR/NOR Gate
- 3.2.2.4. XOR/XNOR Gate
- 3.2.3. Combinational Logic
- 3.2.3.1. Arithmetic Circuits
- 3.2.3.2. Logic Circuits
- 3.2.4. Finite State Machine
- 3.2.5. Pushdown Automaton
- 3.3. Neural Network
- 3.3.1. Feedforward Neural Network
- 3.3.2. Long Short Term Memory Neural Network
- 3.3.3. Transformer Neural Network
- 3.4. Turing Machine
- 3.4.1. Neural Turing Machine
- 3.4.1.1. Feedforward Neural Turing Machine
- 3.4.1.2. LSTM Neural Turing Machine
- 3.4.1.3. Transformer Neural Turing Machine
- 3.4.2. Differentiable Neural Computer
- 3.4.2.1. Feedforward Differentiable Neural Computer
- 3.4.2.2. LSTM Differentiable Neural Computer
- 3.4.2.3. Transformer Differentiable Neural Computer

## 3.5. Computer Architecture

3.5.1. von Neumann Architecture

3.5.1.1. Control Unit

3.5.1.2. ALU

3.5.1.3. Memory Unit

3.5.1.4. I/O Unit

3.5.2. Harvard Architecture

3.5.2.1. Control Unit

3.5.2.2. ALU

3.5.2.3. Memory Unit

3.5.2.4.I/O Unit

## 3.6. Advanced Computer Architecture

3.6.1. Processing Unit

3.6.1.1. SISD

3.6.1.2. SIMD

3.6.1.3. MISD

3.6.1.4. MIMD

3.6.2. System on Chip

3.6.2.1. Bus on Chip

3.6.2.2. Network on Chip

 $3.6.3. \ \mathrm{Multi-Processor}$  System on Chip

## 4. HARDWARE WORKFLOW

## 1. System Level (SystemC/SystemVerilog)

The System Level abstraction of a system only looks at its biggest building blocks like processing units or peripheral devices. At this level the circuit is usually described using traditional programming languages like SystemC or SystemVerilog. Sometimes special software libraries are used that are aimed at simulation circuits on the system level. The IEEE 1685-2009 standard defines the IP-XACT file format that can be used to represent designs on the system level and building blocks that can be used in such system level designs.

#### 2. Behavioral & Register Transfer Level (VHDL/Verilog)

At the Behavioural Level abstraction a language aimed at hardware description such as Verilog or VHDL is used to describe the circuit, but so-called behavioural modeling is used in at least part of the circuit description.

In behavioural modeling there must be a language feature that allows for imperative programming to be used to describe data paths and registers. This is the always -block in Verilog and the process -block in VHDL.

A design in Register Transfer Level representation is usually stored using HDLs like Verilog and VHDL. But only a very limited subset of features is used, namely minimalistic always blocks (Verilog) or process blocks (VHDL) that model the register type used and unconditional assignments for the datapath logic. The use of HDLs on this level simplifies simulation as no additional tools are required to simulate a design in Register Transfer Level representation.

#### 3. Logical Gate

At the Logical Gate Level the design is represented by a netlist that uses only cells from a small number of single-bit cells, such as basic logic gates (AND, OR, NOT, XOR, etc.) and registers (usually D-Type Flip-flops). A number of netlist formats exists that can be used on this level such as the Electronic Design Interchange Format (EDIF), but for ease of simulation often a HDL netlist is used. The latter is a HDL file (Verilog or VHDL) that only uses the most basic language constructs for instantiation and connecting of cells.

#### 4. Physical Gate

On the Physical Gate Level only gates are used that are physically available on the target architecture. In some cases this may only be NAND, NOR and NOT gates as well as D-Type registers. In the case of an FPGA-based design the Physical Gate Level representation is a netlist of LUTs with optional output registers, as these are the basic building blocks of FPGA logic cells.

#### 5. Switch Level

sudo apt update

A Switch Level representation of a circuit is a netlist utilizing single transistors as cells. Switch Level modeling is possible in Verilog and VHDL, but is seldom used in modern designs, as in modern digital ASIC or FPGA flows the physical gates are considered the atomic build blocks of the logic circuit.

- 1. Settings  $\to$  Apps  $\to$  Apps & features  $\to$  Related settings, Programs and Features  $\to$  Turn Windows features on or off  $\to$  Windows Subsystem for Linux
- 2. Microsoft Store  $\rightarrow$  INSTALL UBUNTU

```
Front-End and Back-End Library type:
```

```
sudo apt upgrade

sudo apt install bison cmake flex freeglut3-dev libcairo2-dev libgs1-dev \
libncurses-dev libx11-dev m4 python-tk python3-tk swig tcl tcl-dev tk-dev tcsh
Synthesizer Library type:

sudo apt update
sudo apt upgrade

sudo apt -y install build-essential clang bison flex \
libreadline-dev gawk tcl-dev libffi-dev git make gnat \
graphviz xdot pkg-config python3 libboost-system-dev \
libboost-python-dev libboost-filesystem-dev zlib1g-dev
```

#### 4.1. FRONT-END OPEN SOURCE TOOLS

## 4.1.1. Modeling System Level of Hardware

A System Description Language Editor is a computer tool that allows to generate software code. A System Description Language is a formal language, which comprises a Programming Language (input), producing a Hardware Description (output). Programming languages are used in computer programming to implement algorithms. The description of a programming language is split into the two components of syntax (form) and semantics (meaning).

#### System Description Language Editor

type:

git clone https://github.com/emacs-mirror/emacs

## 4.1.2. Simulating System Level of Hardware

A System Description Language Simulator (translator) is a computer program that translates computer code written in a Programming Language (the source language) into a Hardware Description Language (the target language). The compiler is primarily used for programs that translate source code from a high-level programming language to a low-level language to create an executable program.

## SystemVerilog System Description Language Simulator

type:

```
git clone http://git.veripool.org/git/verilator

cd verilator
autoconf
./configure
make
sudo make install

cd sim/verilog/regression/wb/vtor
source SIMULATE-IT

cd sim/verilog/regression/ahb3/vtor
source SIMULATE-IT

cd sim/verilog/regression/axi4/vtor
source SIMULATE-IT
```

#### 4.1.3. Verifying System Level of Hardware

A UVM standard improves interoperability and reduces the cost of repurchasing and rewriting IP for each new project or Electronic Design Automation tool. It also makes it easier to reuse verification components. The UVM Class Library provides generic utilities, such as component hierarchy, Transaction Library Model or configuration database, which enable the user to create virtually any structure wanted for the testbench.

### SystemVerilog System Description Language Verifier

type:

git clone https://github.com/QueenField/UVM

## 4.1.4. Describing Register Transfer Level of Hardware

A Hardware Description Language Editor is any editor that allows to generate hardware code. Hardware Description Language is a specialized computer language used to describe the structure and behavior of digital logic circuits. It allows for the synthesis of a HDL into a netlist, which can then be synthesized, placed and routed to produce the set of masks used to create an integrated circuit.

## Hardware Description Language Editor

type:

git clone https://github.com/emacs-mirror/emacs

#### 4.1.5. Simulating Register Transfer Level of Hardware

A Hardware Description Language Simulator uses mathematical models to replicate the behavior of an actual hardware device. Simulation software allows for modeling of circuit operation and is an invaluable analysis tool. Simulating a circuit's behavior before actually building it can greatly improve design efficiency by making faulty designs known as such, and providing insight into the behavior of electronics circuit designs.

## VHDL Hardware Description Language Simulator

type:

```
git clone https://github.com/ghdl/ghdl
cd ghdl
./configure --prefix=/usr/local
sudo make install
cd sim/vhdl/regression/wb/ghdl
source SIMULATE-IT
cd sim/vhdl/regression/ahb3/ghdl
source SIMULATE-IT
cd sim/vhdl/regression/axi4/ghdl
source SIMULATE-IT
Verilog Hardware Description Language Simulator
type:
git clone https://github.com/steveicarus/iverilog
cd iverilog
sh autoconf.sh
./configure
make
sudo make install
cd sim/verilog/regression/wb/iverilog
source SIMULATE-IT
cd sim/verilog/regression/ahb3/iverilog
source SIMULATE-IT
cd sim/verilog/regression/axi4/iverilog
source SIMULATE-IT
```

#### 4.1.6. Synthesizing Register Transfer Level of Hardware

A Hardware Description Language Synthesizer turns a RTL implementation into a Logical Gate Level implementation. Logical design is a step in the standard design cycle in which the functional design of an electronic circuit is converted into the representation which captures logic operations, arithmetic operations, control flow, etc. In EDA parts of the logical design is automated using synthesis tools based on the behavioral description of the circuit.

#### Verilog Hardware Description Language Synthesizer

```
type:
git clone https://github.com/YosysHQ/yosys
```

```
cd yosys
make
sudo make install
cd synthesis/yosys
source SYNTHESIZE-IT
VHDL Hardware De
```

#### VHDL Hardware Description Language Synthesizer

```
type for Plugin:
git clone https://github.com/ghdl/ghdl-yosys-plugin

cd ghdl-yosys-plugin
make GHDL=/usr/local
sudo yosys-config --exec mkdir -p --datdir/plugins
sudo yosys-config --exec cp "ghdl.so" --datdir/plugins/ghdl.so
cd synthesis/yosys
source SYNTHESIZE-IT
```

## 4.1.7. Optimizing Register Transfer Level of Hardware

A Hardware Description Language Optimizer finds an equivalent representation of the specified logic circuit under specified constraints (minimum area, pre-specified delay). This tool combines scalable logic optimization based on And-Inverter Graphs (AIGs), optimal-delay DAG-based technology mapping for look-up tables and standard cells, and innovative algorithms for sequential synthesis and verification.

#### Verilog Hardware Description Language Optimizer

```
type:
git clone https://github.com/YosysHQ/yosys

cd yosys
make
sudo make install
cd synthesis/yosys
source SYNTHESIZE-IT
```

## 4.1.8. Verifying Register Transfer Level of Hardware

A Hardware Description Language Verifier proves or disproves the correctness of intended algorithms underlying a hardware system with respect to a certain formal specification or property, using formal methods of mathematics. Formal verification uses modern techniques (SAT/SMT solvers, BDDs, etc.) to prove correctness by essentially doing an exhaustive search through the entire possible input space (formal proof).

### Verilog Hardware Description Language Verifier

type:

git clone https://github.com/YosysHQ/SymbiYosys

## 4.2. BACK-END OPEN SOURCE TOOLS

#### Library

```
type:
sudo apt update
sudo apt upgrade
```

sudo apt install bison cmake flex freeglut3-dev libcairo2-dev libgs1-dev \ libncurses-dev libx11-dev m4 python-tk python3-tk swig tcl tcl-dev tk-dev tcsh

#### **Back-End Workflow Qflow**

```
type:
git clone https://github.com/RTimothyEdwards/qflow
cd qflow
./configure
make
sudo make install
mkdir qflow
cd qflow
```

#### 4.2.1. Planning Switch Level of Hardware

A Floor-Planner of an Integrated Circuit (IC) is a schematic representation of tentative placement of its major functional blocks. In modern electronic design process floor-plans are created during the floor-planning design stage, an early stage in the hierarchical approach to Integrated Circuit design. Depending on the design methodology being followed, the actual definition of a floor-plan may differ.

#### Floor-Planner

```
type:
git clone https://github.com/RTimothyEdwards/magic

cd magic
   ./configure
make
sudo make install
```

## 4.2.2. Placing Switch Level of Hardware

A Standard Cell Placer takes a given synthesized circuit netlist together with a technology library and produces a valid placement layout. The layout is optimized according to the aforementioned objectives and ready for cell resizing and buffering, a step essential for timing and signal integrity satisfaction. Physical design flow are iterated a number of times until design closure is achieved.

#### Standard Cell Placer

```
type:
git clone https://github.com/rubund/graywolf

cd graywolf
mkdir build
cd build
cmake ..
make
sudo make install
```

#### 4.2.3. Timing Switch Level of Hardware

A Standard Cell Timing-Analizer is a simulation method of computing the expected timing of a digital circuit without requiring a simulation of the full circuit. High-performance integrated circuits have traditionally been

characterized by the clock frequency at which they operate. Measuring the ability of a circuit to operate at the specified speed requires an ability to measure, during the design process, its delay at numerous steps.

### Standard Cell Timing-Analizer

```
type:
git clone https://github.com/The-OpenROAD-Project/OpenSTA
cd OpenSTA
mkdir build
cd build
cmake ..
make
sudo make install
```

## 4.2.4. Routing Switch Level of Hardware

A Standard Cell Router takes pre-existing polygons consisting of pins on cells, and pre-existing wiring called pre-routes. Each of these polygons are associated with a net. The primary task of the router is to create geometries such that all terminals assigned to the same net are connected, no terminals assigned to different nets are connected, and all design rules are obeyed.

#### Standard Cell Router

```
type:
```

```
git clone https://github.com/RTimothyEdwards/qrouter
cd qrouter
./configure
make
sudo make install
```

#### 4.2.5. Simulating Switch Level of Hardware

A Standard Cell Simulator treats transistors as ideal switches. Extracted capacitance and lumped resistance values are used to make the switch a little bit more realistic than the ideal, using the RC time constants to predict the relative timing of events. This simulator represents a circuit in terms of its exact transistor structure but describes the electrical behavior in a highly idealized way.

#### Standard Cell Simulator

```
type:
git clone https://github.com/RTimothyEdwards/irsim
cd irsim
./configure
make
sudo make install
```

## 4.2.6. Verifying Switch Level of Hardware LVS

A Standard Cell Verifier compares netlists, a process known as LVS (Layout vs. Schematic). This step ensures that the geometry that has been laid out matches the expected circuit. The greatest need for LVS is in large analog or mixed-signal circuits that cannot be simulated in reasonable time. LVS can be done faster than simulation, and provides feedback that makes it easier to find errors.

## Standard Cell Verifier

```
type:
git clone https://github.com/RTimothyEdwards/netgen

cd netgen
./configure
make
sudo make install
cd synthesis/qflow
source FLOW-IT
```

### 4.2.7. Checking Switch Level of Hardware DRC

A Standard Cell Checker is a geometric constraint imposed on Printed Circuit Board (PCB) and Integrated Circuit (IC) designers to ensure their designs function properly, reliably, and can be produced with acceptable yield. Design Rules for production are developed by hardware engineers based on the capability of their processes to realize design intent. Design Rule Checking (DRC) is used to ensure that designers do not violate design rules.

#### Standard Cell Checker

```
type:
git clone https://github.com/RTimothyEdwards/magic
cd magic
./configure
make
sudo make install
```

#### 4.2.8. Printing Switch Level of Hardware GDS

A Standard Cell Editor allows to print a set of standard cells. The standard cell methodology is an abstraction, whereby a low-level VLSI layout is encapsulated into a logical representation. A standard cell is a group of transistor and interconnect structures that provides a boolean logic function (AND, OR, XOR, XNOR, inverters) or a storage function (flipflop or latch).

#### Standard Cell Editor

```
type:
git clone https://github.com/RTimothyEdwards/magic
cd magic
./configure
make
sudo make install
```

## 5. SOFTWARE WORKFLOW

## 5.1. BACK-END OPEN SOURCE TOOLS

```
type:
```

```
sudo apt install autoconf automake autotools-dev curl python3 libmpc-dev \ libmpfr-dev libgmp-dev gawk build-essential bison flex texinfo gperf \ libtool patchutils bc zlib1g-dev libexpat-dev
```

```
5.1.1. MSP430
5.1.1.1. MSP430 GNU C/C++
5.1.1.2. MSP430 GNU Go
5.1.2. OpenRISC
5.1.2.1. OpenRISC GNU C/C++
5.1.2.2. OpenRISC GNU Go
5.1.3. RISC-V
5.1.3.1. RISC-V GNU C/C++ type:
git clone --recursive https://github.com/riscv/riscv-gnu-toolchain
cd riscv-gnu-toolchain
./configure --prefix=/opt/riscv-elf-gcc
sudo make clean
sudo make
./configure --prefix=/opt/riscv-elf-gcc
sudo make clean
sudo make linux
./configure --prefix=/opt/riscv-elf-gcc --enable-multilib
sudo make clean
sudo make linux
5.1.3.2. RISC-V GNU Go type:
git clone --recursive https://go.googlesource.com/go riscv-go
cd riscv-go/src
./all.bash
cd ../..
sudo mv riscv-go /opt
5.2. FRONT-END OPEN SOURCE TOOLS
5.2.1. MSP430
5.2.2. OpenRISC
5.2.3. RISC-V
type:
sudo apt install device-tree-compiler libglib2.0-dev libpixman-1-dev pkg-config
5.2.3.1. Hardware Engineers Compiler: Spike Building Proxy Kernel
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/riscv/riscv-pk
```

```
cd riscv-pk
mkdir build
cd build
../configure --prefix=/opt/riscv-elf-gcc --host=riscv64-unknown-elf
sudo make install
Building Spike
type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/riscv/riscv-isa-sim
cd riscv-isa-sim
mkdir build
cd build
../configure --prefix=/opt/riscv-elf-gcc
sudo make install
5.2.3.2. Software Engineers Compiler: QEMU type:
export PATH=/opt/riscv-elf-gcc/bin:${PATH}
git clone --recursive https://github.com/qemu/qemu
./configure --prefix=/opt/riscv-elf-gcc \
--target-list=riscv64-softmmu,riscv32-softmmu,riscv64-linux-user,riscv32-linux-user
make
sudo make install
```

## 6. QUALITY ASSURANCE

- 6.1. SCOPE
- 6.2. NORMATIVE REFERENCE
- 6.3. TERMS AND DEFINITIONS
- 6.4. CONTEXT OF THE ORGANIZATION
- 6.4.1. Understanding the organization and itsontext
- 6.4.2. Understanding the needs and expectations of interested parties
- 6.4.3. Determining the scope of the quality management system
- 6.4.4. Quality management system and its processes
- 6.5. LEADERSHIP
- 6.5.1. Leadership and commitment
- 6.5.1.1. General

- 6.5.1.2. Customer focus
- 6.5.2. Policy
- 6.5.2.1. Establishing the quality policy
- 6.5.2.2. Communicating the quality policy
- 6.5.3. Organizational roles, responsibilities and authorities
- 6.6. PLANNING
- 6.6.1. Actions to address risks and opportunities
- 6.6.2. Quality objectives and planning to achieve them
- 6.6.3. Planning of changes
- 6.7. SUPPORT
- 6.7.1. Resources
- 6.7.1.1. General
- 6.7.1.2. People
- 6.7.1.3. Infrastructure
- 6.7.1.4. Environment for the operation of process
- 6.7.1.5. Monitoring and measuring resources
- 6.7.1.5.1. General
- 6.7.1.5.2. Measurement traceability
- 6.7.1.6. Organizational knowledge
- 6.7.2. Competence
- 6.7.3. Awareness
- 6.7.4. Communication
- 6.7.5. Documented information
- 6.7.5.1. General
- 6.7.5.2. Creating and updating
- 6.7.5.3. Control of documented information

## 6.8. OPERATION

- 6.8.1. Operational planning and control
- 6.8.2. Requirements for products and services
- 6.8.2.1. Customer communication

- 6.8.2.2. Determining the requirements for products and services
- 6.8.2.3. Review of the requirements for products and services
- 6.8.2.4. Changes to requirements for products and services
- 6.8.3. Design and development of products and services
- 6.8.3.1. General
- 6.8.3.2. Design and development planning
- 6.8.3.3. Design and development inputs
- 6.8.3.4. Design and development controls
- 6.8.3.5. Design and development outputs
- 6.8.4. Control of externally provided processes, products and services
- 6.8.4.1. General
- 6.8.4.2. Type and extent of control
- 6.8.4.3. Information for external providers
- 6.8.5. Production and service provision
- 6.8.5.1. Control of production and service provision
- 6.8.5.2. Identification and traceability
- 6.8.5.3. Property belonging to customers or external providers
- 6.8.5.4. Preservation
- 6.8.5.5. Post-delivery activities
- 6.8.5.6. Control of changes
- 6.8.6. Release of products and services
- 6.8.7. Control of nonconforming outputs
- 6.9. PERFORMANCE EVALUATION
- 6.9.1. Monitoring, measurement, analysis and evaluation
- 6.9.1.1. General
- 6.9.1.2. Customer satisfaction
- 6.9.1.3. Analysis and evaluation

- 6.9.2. Internal audit
- 6.9.3. Management review
- **6.9.3.1.** General
- 6.9.3.2. Management review inputs
- 6.9.3.3. Management review outputs

## 6.10. IMPROVEMENT

- **6.10.1.** General
- 6.10.2. Nonconformity and corrective action
- 6.10.3. Continual improvement

## 7. CERTIFICATION

## 7.1. PLANNING PROCESS

- 7.1.1. Planning Process Objectives
- 7.1.2. Planning Process Activities

#### 7.2. HARDWARE DESIGN PROCESS

- 7.2.1. Requirements Capture Process
- 7.2.2. Conceptual Design Process
- 7.2.3. Detailed Design Process
- 7.2.4. Implementation Process
- 7.2.5. Production Transition
- 7.2.6. Acceptance Test
- 7.2.7. Series Production

## 7.3. VALIDATION AND VERIFICATION PROCESS

- 7.3.1. Validation Process
- 7.3.2. Verification Process
- 7.3.3. Validation and Verification Methods

## 7.4. CONFIGURATION MANAGEMENT PROCESS

- 7.4.1. Configuration Management Objectives
- 7.4.2. Configuration Management Activities
- 7.4.3. Data Control Categories

#### 7.5. PROCESS ASSURANCE

- 7.5.1. Process Assurance Objectives
- 7.5.2. Process Assurance Activities

## 7.6. CERTIFICATION LIAISON PROCESS

- 7.6.1. Means of Compliance and Planning
- 7.6.2. Compliance Substantiation

## 7.7. HARDWARE DESIGN LIFECYCLE DATA

- 7.7.1. Hardware Plans
- 7.7.1.1. Plan for Hardware Aspects of Certification

#### 7.7.1.2. Hardware Design Plan

- 7.7.1.3. Hardware Validation Plan
- 7.7.1.4. Hardware Verification Plan
- 7.7.1.5. Hardware Configuration Management Plan
- 7.7.1.6. Hardware Process Assurance Plan
- 7.7.2. Hardware Design Standards and Guidance
- 7.7.2.1. Requirements Standards
- 7.7.2.2. Hardware Design Standards
- 7.7.2.3. Validation and Verification Standards
- 7.7.2.4. Hardware Archive Standards
- 7.7.3. Hardware Design Data
- 7.7.3.1. Hardware Requirements
- 7.7.3.2. Hardware Design Representation Data
- 7.7.3.2.1. Conceptual Design Data
- **7.7.3.2.2.** Detailed Design Data 7.7.3.2.2.1. Top-Level Drawing
- 7.7.3.2.2.2. Assembly Drawings
- 7.7.3.2.2.3. Installation Control Drawings
- 7.7.3.2.2.4. Hardware/Software Interface Data
- 7.7.4. Validation and Verification Data
- 7.7.4.1. Traceability Data
- 7.7.4.2. Review and Analysis Procedures
- 7.7.4.3. Review and Analysis Results
- 7.7.4.4. Test Procedures
- 7.7.4.5. Test Results

### 7.8. ADDITIONAL CONSIDERATIONS

- 7.8.1. Use of Previously Developed Hardware
- 7.8.2. Commercial Components Usage
- 7.8.3. Product Service Experience
- 7.8.4. Tool Assessment and Qualification