

A study on the Dik Universe

Development of a bigger dik

Darius Chira, Razvan Bucur, Titas Lasickas, Paulius Riauka

Electronics and Computer Engineering, TEPE4-1005fuk, 2018-08

Bachelor Project



Copyright © Aalborg University 2015

Here you can write something about which tools and software you have used for typesetting the document, running simulations and creating figures. If you do not know what to write, either leave this page blank or have a look at the colophon in some of your books.



Electronics and IT
Aalborg University
<http://www.aau.dk>

AALBORG UNIVERSITY

STUDENT REPORT

Title:

Project Title

Abstract:

Here is the abstract

Theme:

Digital Filtering

Project Period:

Fall Semester 2018

Project Group:

ED5-1-E18

Participant(s):

Darius Chira

Razvan Bucur

Titas Lasickas Paulius Riauka

Supervisor(s):

Daniel Ortiz-Arroyo

Copies: 1

Page Numbers: 23

Date of Completion:

December 3, 2018

The content of this report is freely available, but publication (with reference) may only be pursued due to agreement with the author.

Contents

Preface	ix
1 Introduction	1
1.1 Examples	1
1.2 How Does Sections, Subsections, and Subsections Look?	1
1.2.1 This is a Subsection	1
2 Problem Analysis	3
2.1 Problem Description	3
2.1.1 State of hearing aid	3
2.2 Problem Delimitation	4
2.3 Initiating Problem	4
3 Development	5
3.1 Component List	5
3.1.1 Introduction	5
3.1.2 Distancing	5
3.1.3 Microphones characteristics	5
3.1.4 Measurements scenarios	5
3.1.5 Setup	5
3.2 Analog to digital conversion	5
4 Noise Filtering	7
4.1 Research	7
4.1.1 Voice frequency analysis	7
4.1.2 Filter characteristics	7
4.2 Results	7
4.3 Conclusion	10
5 Directional Noise Elimination	11
5.1 Introduction	11
5.2 Concept	11

5.3	Development	11
5.4	Conclusion	11
6	Neural Network Speech Isolation	13
7	Results	15
8	Future Work	17
9	Conclusion	19
	Bibliography	21
A	Appendix A name	23

Todo list

<div></div> Is it possible to add a subsubparagraph?	2
<div></div> I think that a summary of this exciting chapter should be added.	2
<div></div> https://www.everydayhearing.com/hearing-loss/articles/state-of-hearing-healthcare-2017/((puthashhere))tech	4
<div></div> reference	5
<div></div> illustration	5
<div></div> https://www.researchgate.net/publication/228749231_Analysis_of_the_Facial_Anthropometric_Data_of_Korean_Pilots_for_Oxygen_Mask_Design	5

Preface

Here is the preface. You should put your signatures at the end of the preface.

Aalborg University, December 3, 2018

Author 1

<username1@XX.aau.dk>

Author 2

<username2@XX.aau.dk>

Author 3

<username3@XX.aau.dk>

Chapter 1

Introduction

Here is the introduction. The next chapter is chapter ??.
a new paragraph

1.1 Examples

You can also have examples in your document such as in example 1.1.

Example 1.1 (An Example of an Example)

Here is an example with some math

$$0 = \exp(i\pi) + 1 . \tag{1.1}$$

You can adjust the colour and the line width in the `macros.tex` file.

1.2 How Does Sections, Subsections, and Subsections Look?

Well, like this

1.2.1 This is a Subsection

and this

This is a Subsubsection

and this.

A Paragraph You can also use paragraph titles which look like this.

A Subparagraph Moreover, you can also use subparagraph titles which look like this. They have a small indentation as opposed to the paragraph titles.

Is it possible to add a subsubparagraph?

I think that a summary of this exciting chapter should be added.

Chapter 2

Problem Analysis

2.1 Problem Description

2.1.1 State of hearing aid

Hearing aid technologies have never been improving as fast as they do now. Ever since major smartphone manufacturer companies started investing into wireless wearable technology research, price of PSAP (personal sound amplification products) has decreased while the amount of features has increased. Throughout recent years wireless earphones became predominant in the global market due to new generation of Bluetooth technology. This improvement even further reduces power consumption of wireless technology. The only three differences between hearing aids and PSAPs were:

- The battery life. Due to a far higher number of features and consistent audio stream PSAPs consume a much higher amount of power.
- Hardware design differences. PSAPs are not oriented around sound localization to inform the user about where the sound is coming from regarding natural sources. PSAPs are often not oriented to be invisible to others, they are more often purposely made to stand out and be recognized among its competitors. Fit customization is also often minimal on PSAPs.
- Regulation requirements to produce the hearing aid and license requirements to sell it.

Most other differences lay in software and could be eliminated through a software update.

It is believed that legislative issues could be solved if manufacturers would put effort to reach for an agreement with legislators although it would require a lot of changes since current hearing aid selling process consists of far more than just taking the product off the shelf and swiping it through the register - it is normally performed at hearing clinics, hearing aid is thoroughly adjusted to fit the consumer's ear for long periods of time, warranty for these devices also is taken in a far more serious manner: it comes with included follow-up office visits, checks and cleaning procedures to maintain the highest level of performance. Some companies do express interest to merge the two markets. According to "The State of Hearing Healthcare 2017" by Lindsey Banks, "If Apple Air Pods or Samsung Gear IconX could add in hearing aid functions, that's instant access to over half of the U.S. over night."

<https://www.everydayhearing.com/hearing-loss/articles/state-of-hearing-healthcare-2017/>
((puthashhere))tech

The value of argument regarding battery life of these two hearables should also heavily decrease in the coming years. At the end of October 2017 Samsung has announced that a considerably new generation of battery has been developed. Currently used lithium-ion batteries seem to have been pushed to it's limit and yet it still takes a fairly long time to charge in a fast-paced society. This problem has pushed electronics manufacturers to develop energy efficient processors. A new graphene-based battery technology should enable 45 percent more capacity and 5 times faster charging speeds.

These reasons should lead to a breakthrough in battery life factor of next year's electronics. If not at 2019, by 2020 hearing aids should receive this battery update. Combined with improvements in Bluetooth technology, these reasons should encourage both hearing aid and consumer audio manufacturers to encourage an increased number of features in coming year's hearing aids as well as PSAPs and might bring the markets closer together.

2.2 Problem Delimitation

2.3 Initiating Problem

Chapter 3

Development

3.1 Component List

3.1.1 Introduction

To create the basis for development of this project two microphones and a structure to keep a constant distance between them were necessary.

3.1.2 Distancing

To maintain a constant distance it was decided to attempt modeling a rod with two microphone holders at it's ends. The distance chosen between the microphones was agreed on by referring to a research article in this area: 15.2 centimeters.

Other parameters were found by following the measurements found in the dataset. These steps have led us towards the structure developement, which after a few iterations has turned into the structure that was used for sampling .

reference

illustration

https://www.researchgate.net/publication/228749231_Analysis_of_the_Facial_Anthropometric_Data_of_Korean_Pilots_for_Oxygen_Mask_Design

3.1.3 Microphones characteristics

3.1.4 Measurements scenarios

3.1.5 Setup

3.2 Analog to digital conversion

r

Figure 3.1: Microphones data sheet

High-fidelity recording system product, designed for QQ, MSN, Skype, Youtube, karaoke apps and Internet chat and so on.


Usage

Plug and play on Windows XP, the updated systems and IOS Systems. Shielding the microphone of built-in sound card automatically. (Few computers that can't be shielded the built-in microphone automatically, you need to switch once manually.)


Features

- Compatible with most computers with USB ports.
- High-quality microphone with High-fidelity recording system.
- Sampling Rate supported: 8KHz, 11.0592KHz, 22.05KHz, 44.1KHz, 11.0592KHz, 48KHz. 16-bit stereo.

Dimensions



Frequency Range



Omnidirectional
(at 1kHz)

Specifications:

- Sensitivity: -30dB±3dB
- Polar Pattern: Omnidirectional
- Impedance: $\leq 2.2K\Omega$
- Sensitivity Range: within -3dB at 1V
- Operating Voltage: 5V
- Frequency Response: 20Hz-16KHz
- Signal/Noise Ratio: 84dB
- Cable Length: 1.5m/5ft



Chapter 4

Noise Filtering

4.1 Research

4.1.1 Voice frequency analysis

Voice frequency ranges vary heavily depending on whether it sources from a male or a female. Fundamental voice frequency varies from 100Hz to 900 Hz for men and 350Hz to 3KHz for women. Including peaks to conserve natural sounding voice, a wider frequency range has to be considered. It rises to 8 KHz for males and 17KHz for females [SeaIndia]. Yet different researches often come up with different results. For example, in phone communications it is accepted to transmit frequency range between 400Hz and 3400Hz. This is the reason some peoples' voices transit poorly over the phone yet for most cases it work fine. This example allows to conclude that smaller frequency ranges could be acceptable. To conserve all of the properties of the human voice, filter boundaries should be around 100Hz to 17KHz but this range would most likely not filter out any noise as it takes up almost an entire frequency range of human hearing (approximately 20Hz to 20KHz).

4.1.2 Filter characteristics

Firstly it was defined that the input response of the signal is infinite and therefore an IIR filter has to be applied. Considering that computing power limitation is out of scope for this project, it was decided to use Butterworth filter as around higher orders of this filter type it approaches rectangular form (an ideal filter).

4.2 Results

Making a field research to find the frequency range that would fit the needs of this project was out scope, therefore to test the filters it was decided to take trial-

error approach. A few samples were made outside during a windy day. This was considered a good idea as it has recreated one of the most common conversation scenarios.

At first it was attempted to conserve the entire frequency range that humans can produce. This has resulted in a filter that seemed to filter out a big part of the noise but if it was listened to, all of the previously recorded noise was still there. It was hard to tell the difference between filtered and not filtered sound samples.

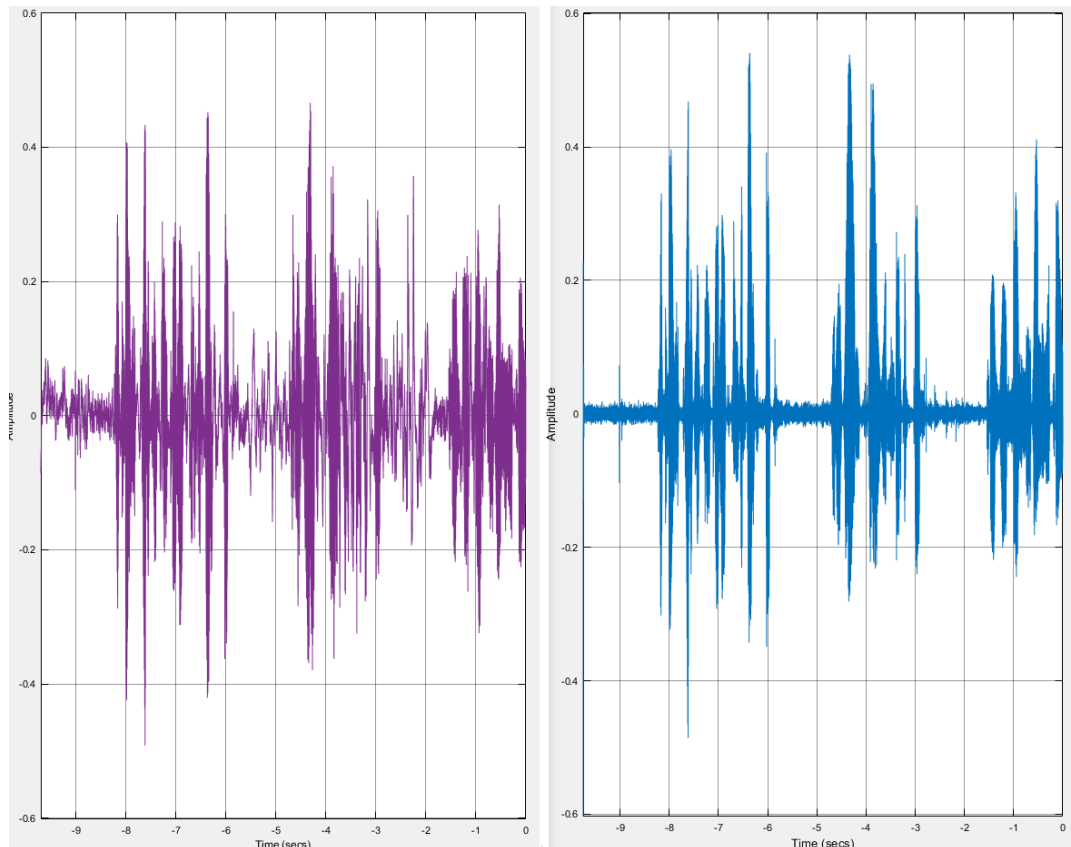


Figure 4.1: Recorded sample on the right and filtered result on the left

As the first approach did not seem to output a satisfying result, it was attempted to the signals by leaving only fundamental frequency radius (100Hz to 3KHz. The result seemed to be far more satisfying as most of the noise was eliminated. However, output clarity was poorer by far in comparison to original. Result of this test could be considered a solution for noise canceling although it would be a very poor one.

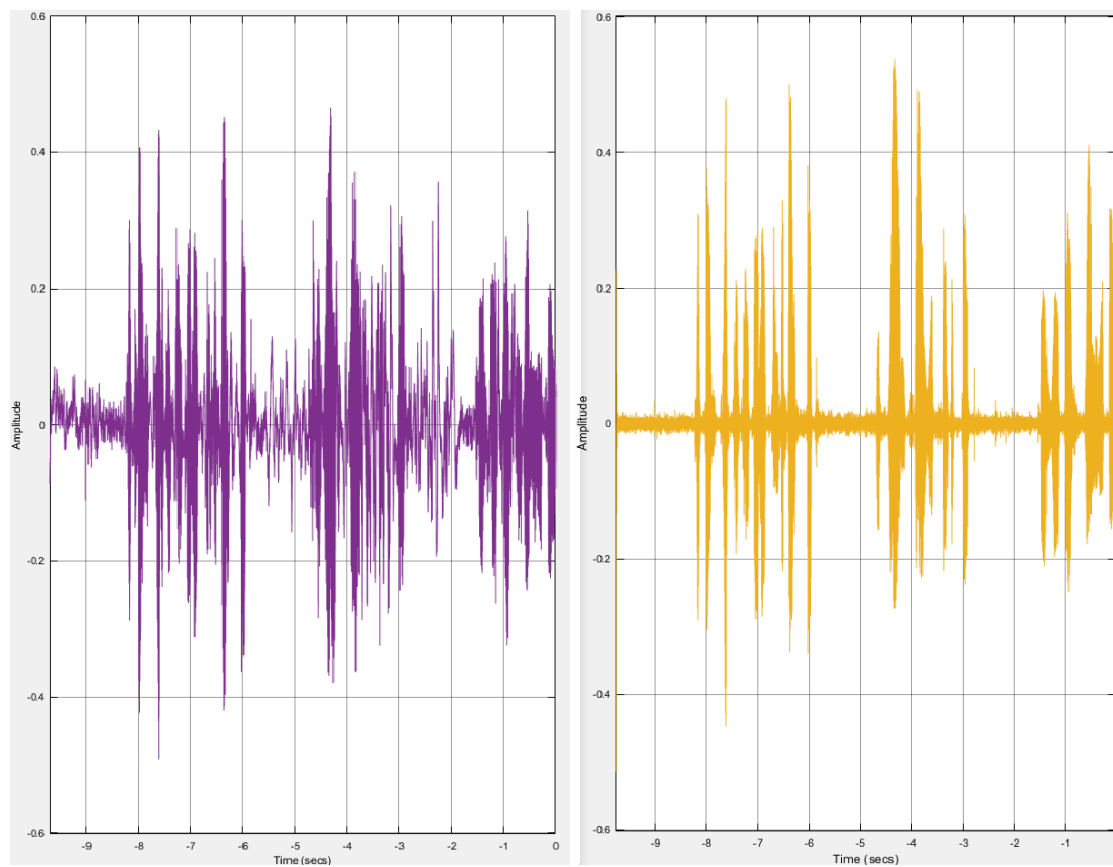


Figure 4.2: Recorded sample on the right and filtered result on the left

Finally the frequency range picked for communication through phone (400Hz to 3400Hz) was taken to trial. Output of the filter was barely different when compared to one the previous one. It had filtered out most of the noise yet the sound clarity was still very poor.

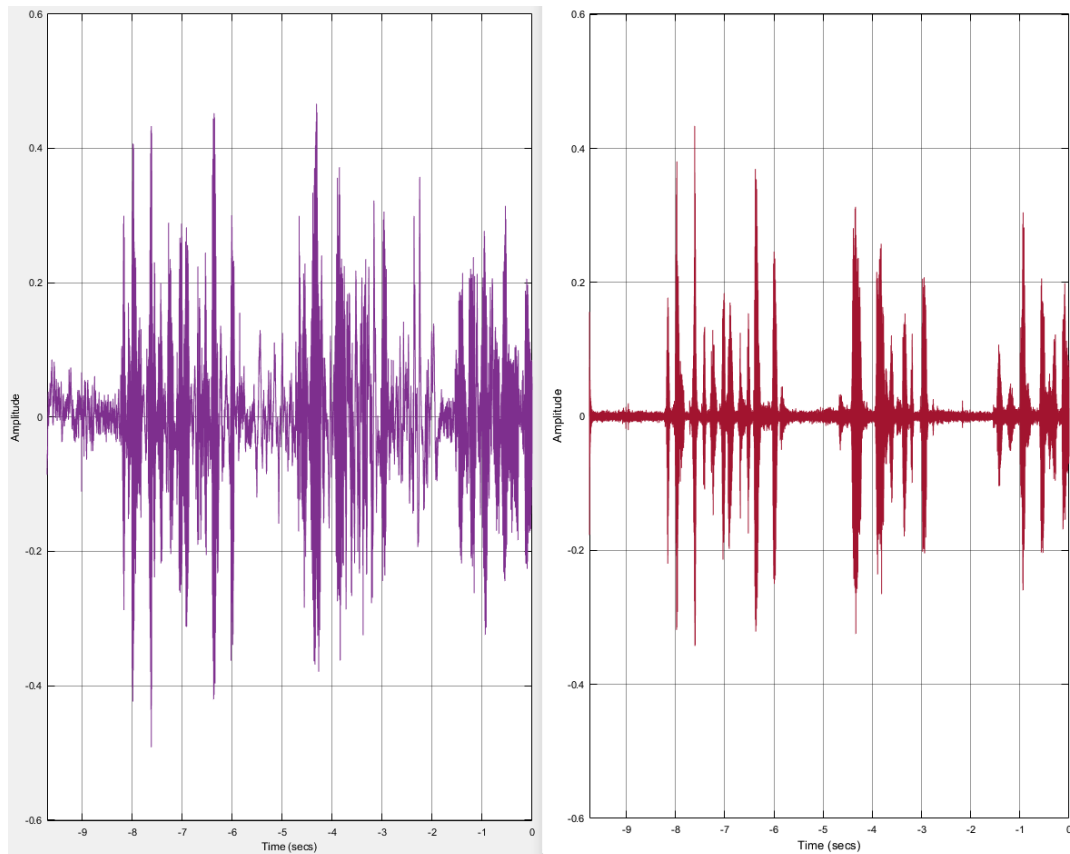


Figure 4.3: Recorded sample on the right and filtered result on the left

4.3 Conclusion

The approach that the group has taken seems to be correct - the filters worked as intended, however a question was raised whether this method is capable of producing a signal that would cancel out most of the sound without affecting sound quality. The filter could be more efficient if different frequency ranges were available to pick from to filter out noises that are common in different environments. This would require in-depth analysis of noises in these environments.

Chapter 5

Directional Noise Elimination

5.1 Introduction

This chapter deals with directional filtering. The idea is presented and tested. The results and conclusions will be shown afterwards.

5.2 Concept

Figure XX shows a scenario where directional filtering could be used. Source 1 and Source 2 are both talking simultaneously. At the Origin, two microphones are recording both signals. Due to the placement of the sources, both microphones will record the sounds, with a certain delay.

5.3 Development

5.4 Conclusion

Chapter 6

Neural Network Speech Isolation

Chapter 7

Results

Chapter 8

Future Work

Chapter 9

Conclusion

In case you have questions, comments, suggestions or have found a bug, please do not hesitate to contact me. You can find my contact details below.

Jesper Kjær Nielsen
jkn@create.aau.dk
<http://sqrt-1.dk>
Audio Analysis Lab, CREATE
Aalborg University
Denmark

Bibliography

- [1] Lars Madsen. *Introduktion til LaTeX*. <http://www.imf.au.dk/system/latex/bog/>. 2010.
- [2] Frank Mittelbach. *The LATEX companion*. 2. ed. Addison-Wesley, 2005.
- [3] Tobias Oetiker. *The Not So Short A Introduction to LaTeX2e*. <http://tobi.oetiker.ch/lshort/lshort.pdf>. 2010.

Appendix A

Appendix A name

Here is the first appendix