


Coding flowchart — standalone on-board firmware



cpx_fog_standalone.ino · Freeze Index (Moore 2008) + movement-energy gate (Bachlin 2010).
While cueing, the motor runs a non-blocking 2 Hz square wave— the rhythmic step cue.

Wireless (streaming) build — the freeze detector moves off-board to the laptop

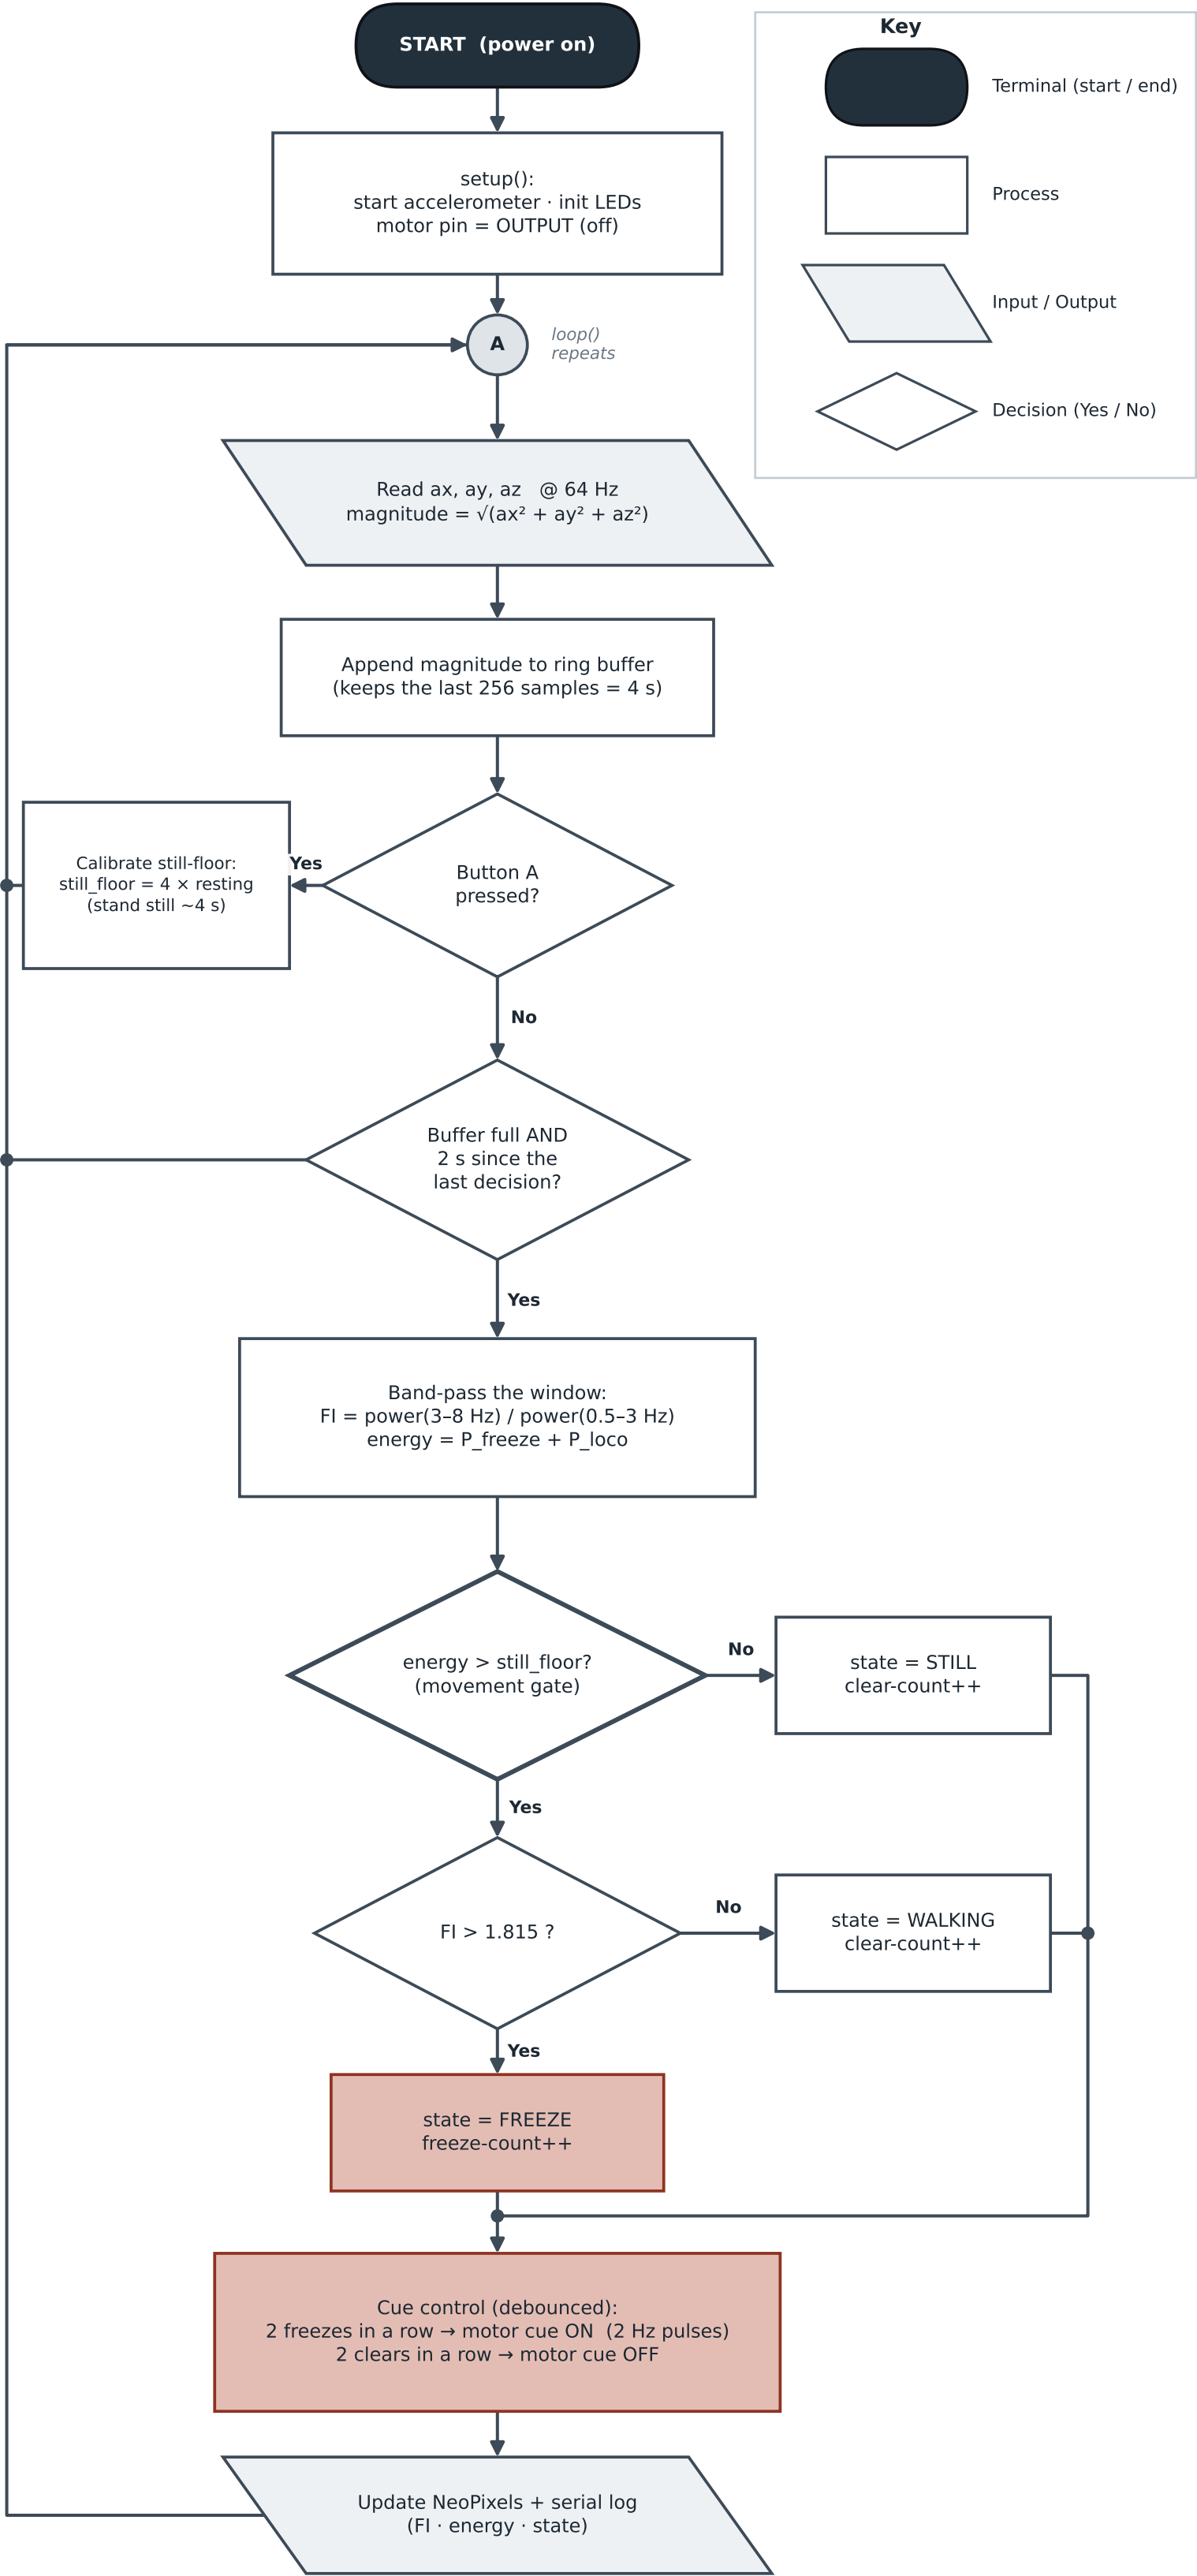