



SENSING BOARD (ESP32) – streams sEMG+FSR over WIFI/UDP to the Pi

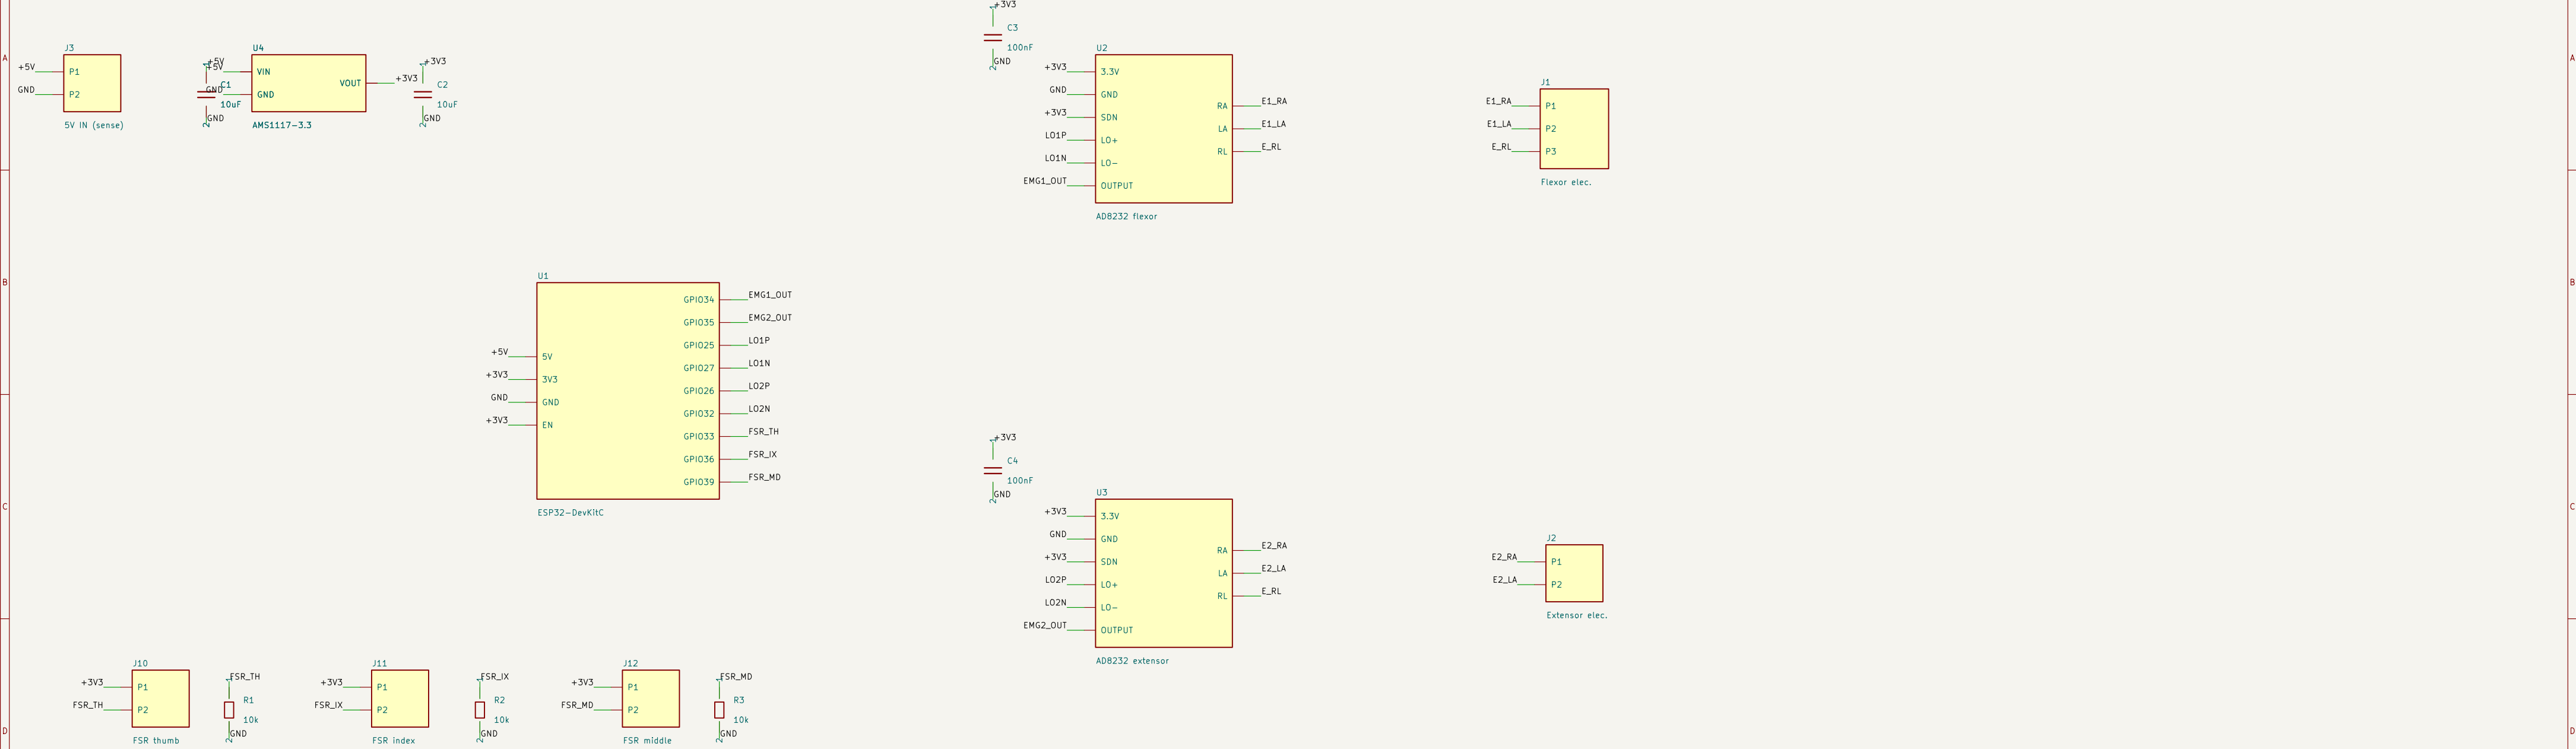

ACTUATION (Raspberry Pi 5) – I2C to PCA9685, servos on separate 5V PSU

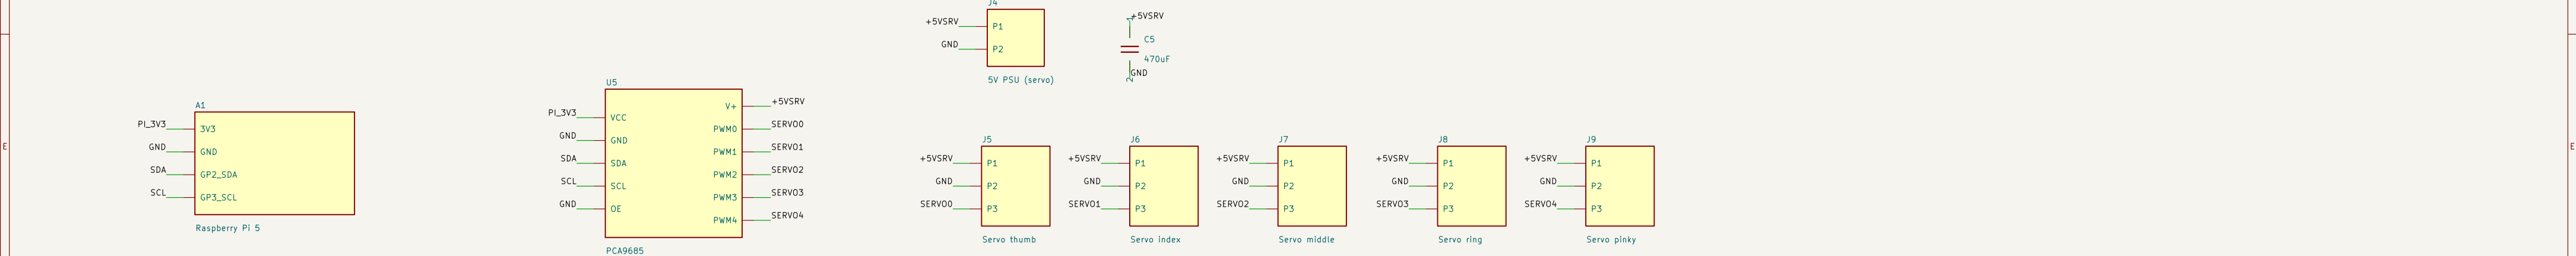

WIFI / UDP link (no wire) --- tie all GNDs at one star point

ESP32 sEMG+FSR sensing · Pi5 -> PCA9685 -> 5 servos