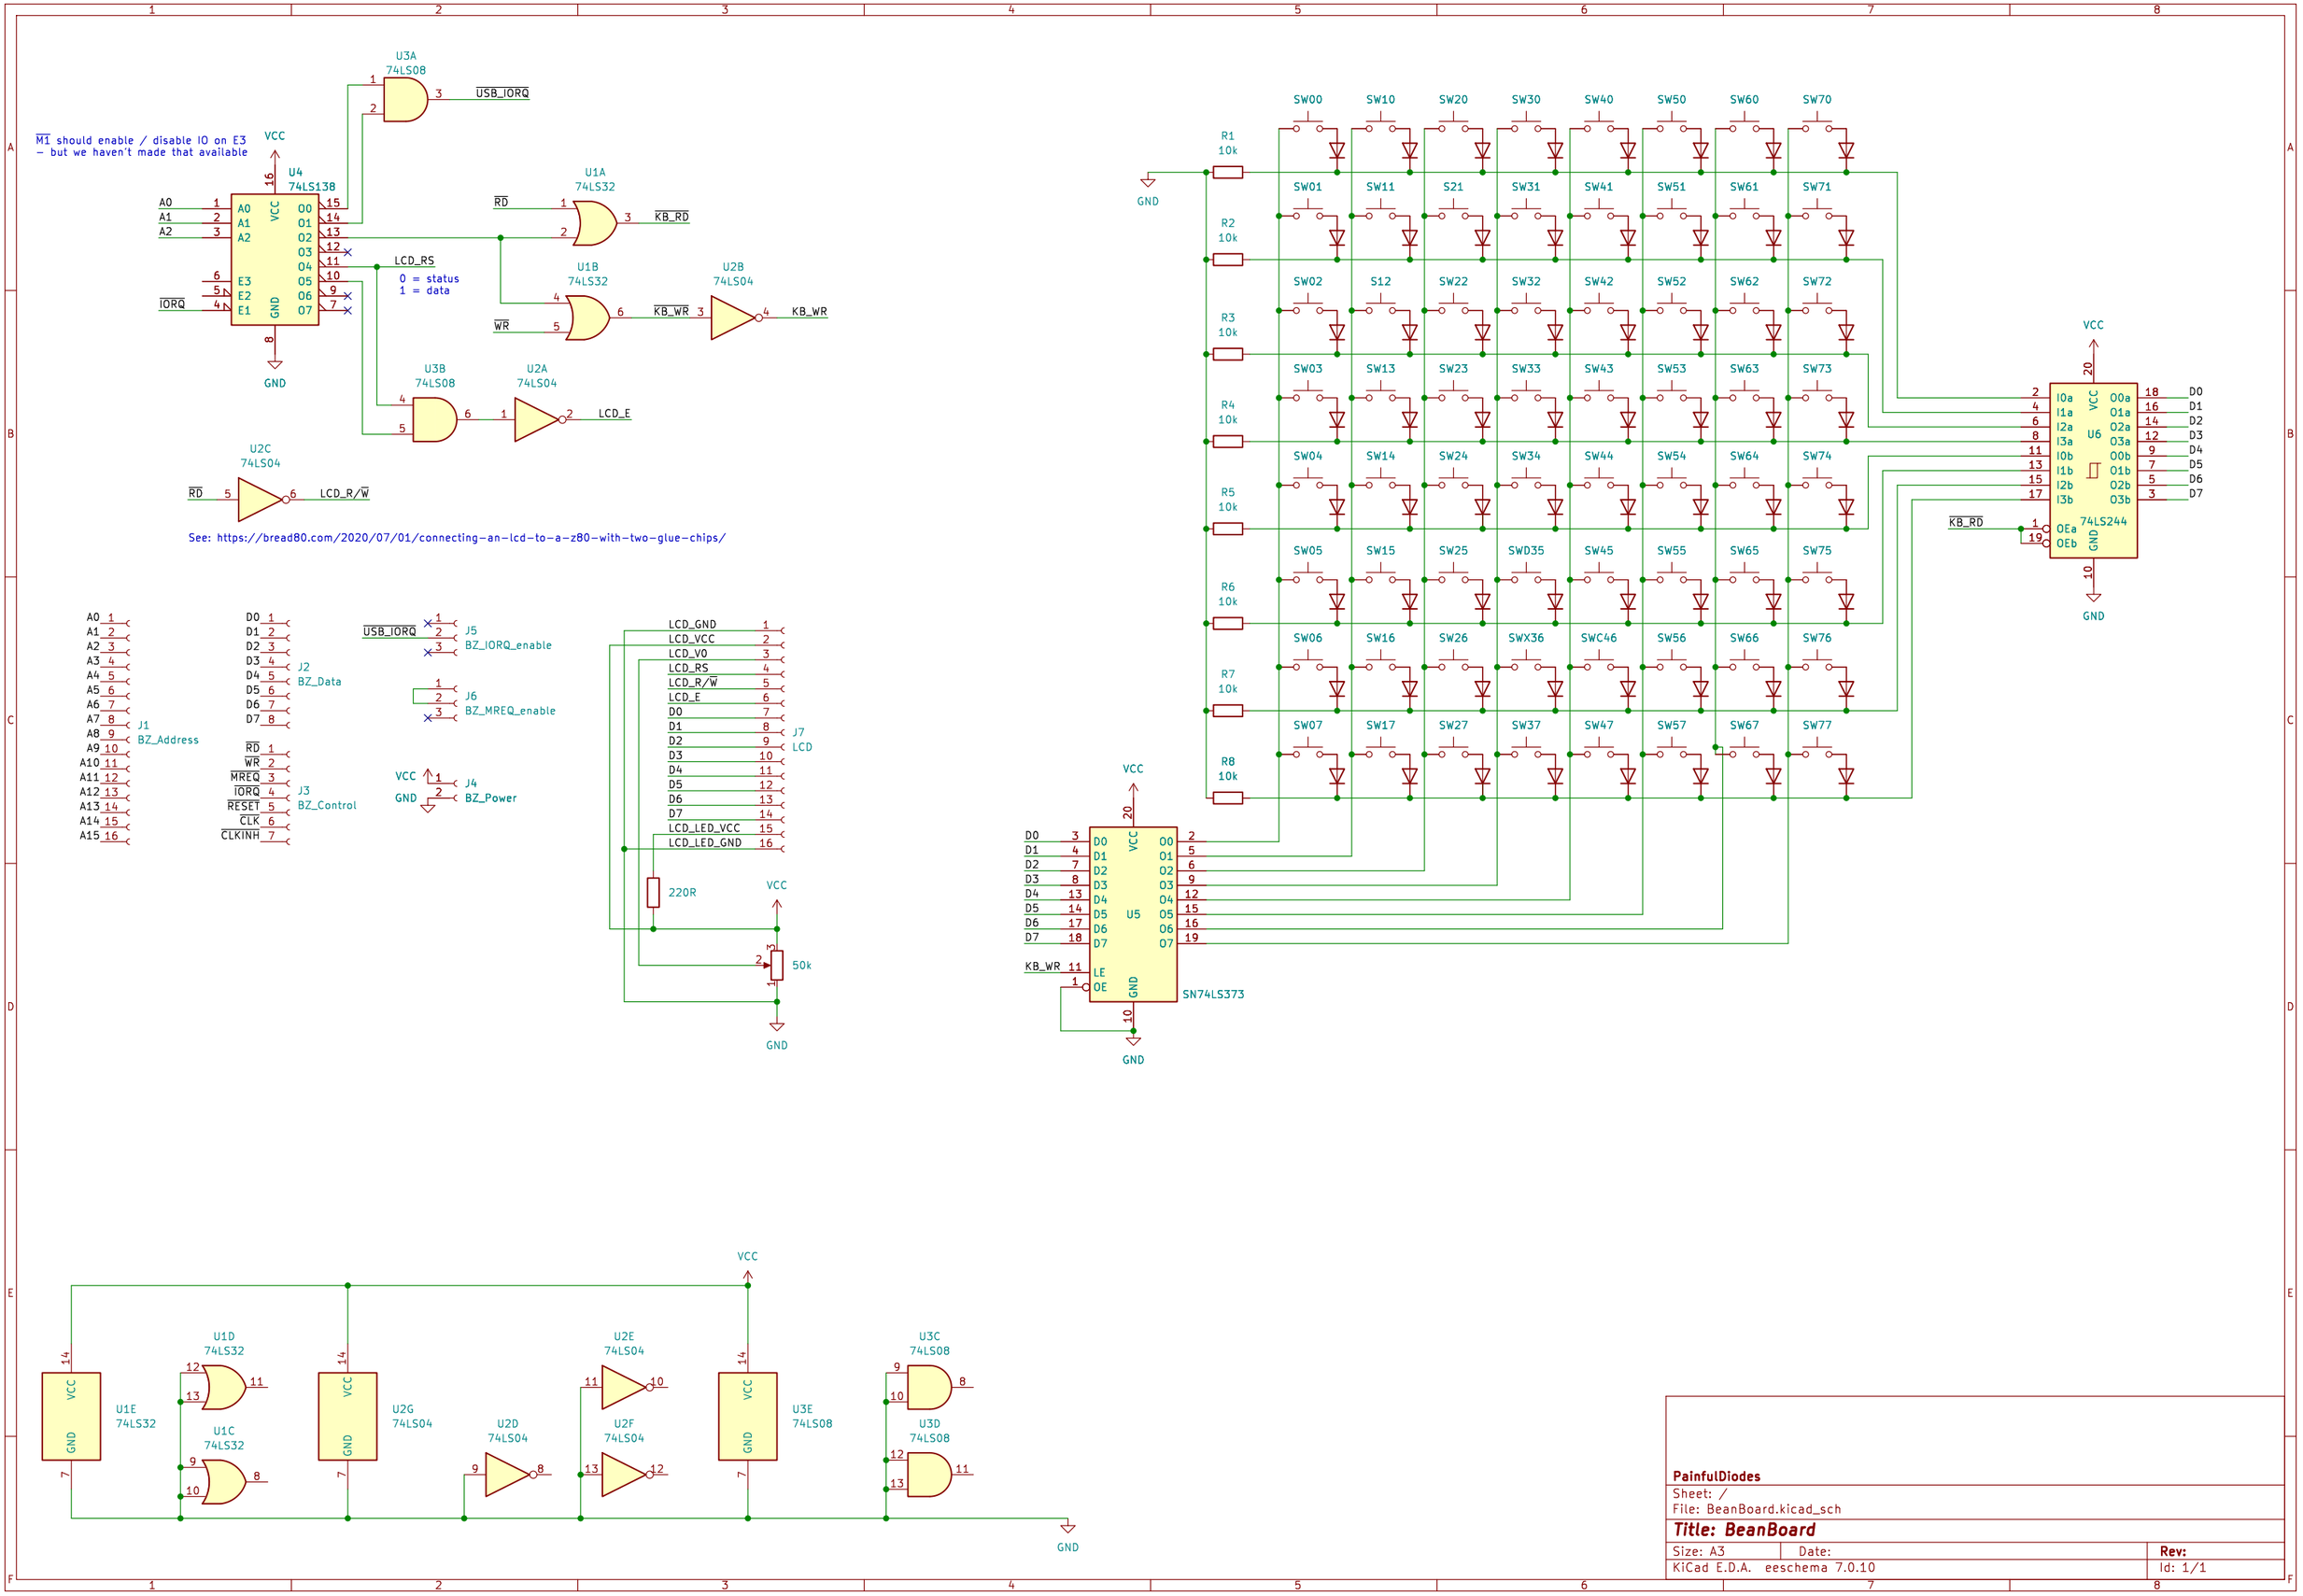
M1 should enable / disable IO on E3
– but we haven't made that available
U4
74LS138
U3A
74LS08
U1A
74LS32
U1B
74LS32
U2B
74LS04
U3B
74LS08
U2A
74LS04
U2C
74LS04
LCD_RS
0 = status
1 = data
LCD_E
LCD_R/W
USB_IORQ
KB_RD
KB_WR
See: https://bread80.com/2020/07/01/connecting-an-lcd-to-a-z80-with-two-glue-chips/
J1
BZ_Address
J2
BZ_Data
J3
BZ_Control
J4
BZ_Power
J5
BZ_IORQ_enable
J6
BZ_MREQ_enable
J7
LCD
220R
50k
U5
SN74LS373
U6
74LS244
R1
10k
R2
10k
R3
10k
R4
10k
R5
10k
R6
10k
R7
10k
R8
10k
U1E
74LS32
U1D
74LS32
U1C
74LS32
U2G
74LS04
U2D
74LS04
U2E
74LS04
U2F
74LS04
U3E
74LS08
U3C
74LS08
U3D
74LS08
VCC
GND
PainfulDiodes
Sheet: /
File: BeanBoard.kicad_sch
Title: BeanBoard
Size: A3
Date:
Rev:
KiCad E.D.A. eeschema 7.0.10
Id: 1/1