




Host side of the module connector. DET\_A and DET\_B are joined here: the swap–detect loop closes only when the module is fully mated. The identity tag of the host vehicle (PBS–HW–ID–01) connects at J3 and reaches the module on the identity–bus contacts. J4 is fitted where the host provides an antenna to an SCM–L module.

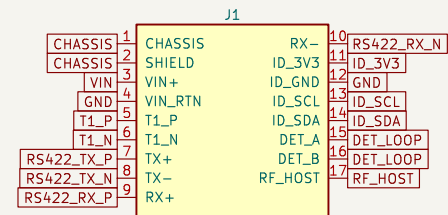


Module receptacle, blind–mate, shuttered (PBS–HW–SCM–01 Section 5.2)

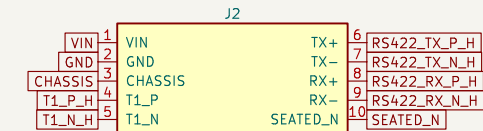


Host harness connector

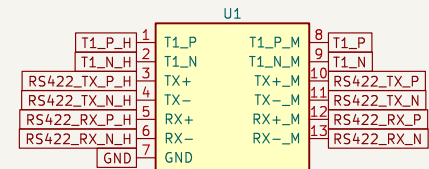


ESD/TVS protection array (data lines)




Identity tag pigtail connector, 4 contacts (PBS–HW–ID–01 Section 5.3)




Coaxial host antenna port (SCM–L RF contact)




Module–seated switch (signal to host)




Mounting hole, chassis bonded



Mounting hole, chassis bonded



Mounting hole, chassis bonded



Mounting hole, chassis bonded